

THE MICRO USER

Volume 6
Number 1
March 1988
£1.25

Top-selling guide
to the BBC Micro, Master,
Archimedes and Z88

REPTON

All the answers in
our mini-magazine

CHALLENGE

Test your skill
at programming

LASERS

Printing at the
speed of light

Z88

- Going online
- Backup utility
- Addition game

UTILITIES

- Graphic compiler
- Ram-save routines

REVIEWS

- Ice King
- OverView
- Genie Utilities
- ... plus all the
latest games

Be a real-life adventurer
Your invitation is on Page 36



Help celebrate our
FIFTH BIRTHDAY
— over £1,000
in prizes!

The Life Of Repton



REPTON AS A BABY



REPTON AT SCHOOL




REPTON AS A TEENAGER



REPTON AT WORK




REPTON AS AN OLD MAN

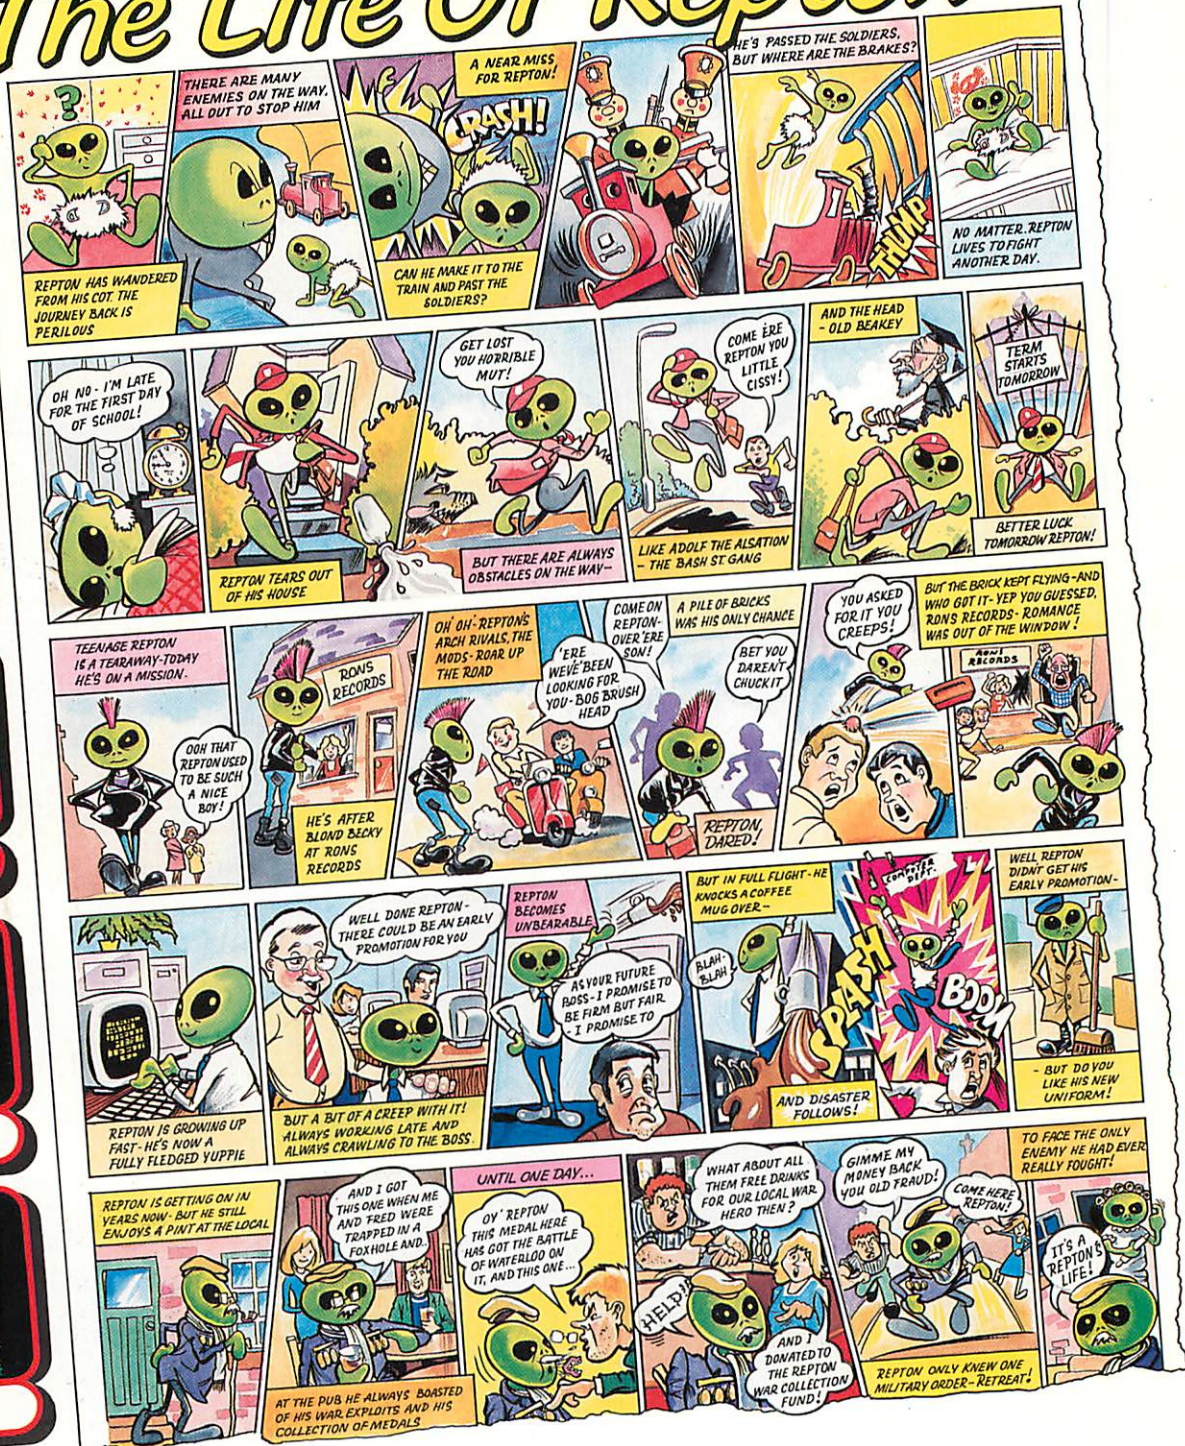

Repton fans have begged, cajoled and pleaded with us to release another set of screens for our Repton 3 game. How could we refuse? Our lovable hero returns again to star in 40 new screens that vividly depict Repton's life-story.

The Five Ages of Repton: — At first we see Repton as a baby: a mewling infant surrounded by teddy-bears, humpty-dumptys, and aggressive clockwork toy-soldiers. Then Repton is a whining school-boy, creeping like snail unwillingly to school, with his pens, his calculator, and a bundle of homework. And then Repton during his teenage years becomes a spikey-haired punk armed with a ghetto-blasters and a collection of records. Then Repton goes to work: we see a harried office-manager amidst computers, photocopyers, and endless cups of coffee. Last scene of all, that ends this strange eventful history, is Repton as an old-age pensioner searching for his false-teeth, his spectacles, his "pint of stout", and his well-polished war-medals.



THE SCREEN EDITOR



THE CHARACTER EDITOR

Each copy of The Life Of Repton includes:

- the Repton 3 main program
- the Repton 3 editor and
- the 40 new game screens

BBC Micro Cassette£6.95
BBC Micro 5 1/4" Disc£7.95
BBC Master Compact 3 1/2" Disc£9.95

Acorn Electron Cassette£6.95
Acorn Electron 5 1/4" Disc£7.95

(Compatible with the BBC B, B+ and Master Series computers).
The screen pictures show the BBC Micro version of the game.

PRIZE COMPETITION

If you complete all 40 screens of The Life of Repton, you can enter our competition. Prizes include £200 in cash, with Repton mugs, badges, pens and certificates for runners-up.

Closing Date: 30th June 1988.

OUR GUARANTEE
• All mail orders are despatched within 24 hours by first-class post.
• Postage and packing is free.
• Faulty cassettes and discs will be replaced immediately.
(This does not affect your statutory rights)

SUPERIOR SOFTWARE
Limited

ACORNSOFT


Dept. LR4, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453

Please make all cheques payable to "Superior Software Ltd".



24 HOUR TELEPHONE
ANSWERING SERVICE FOR ORDERS

IT'S SURPRISING THE TYPE OF PEOPLE
MAKING THE HEADLINES THESE DAYS.

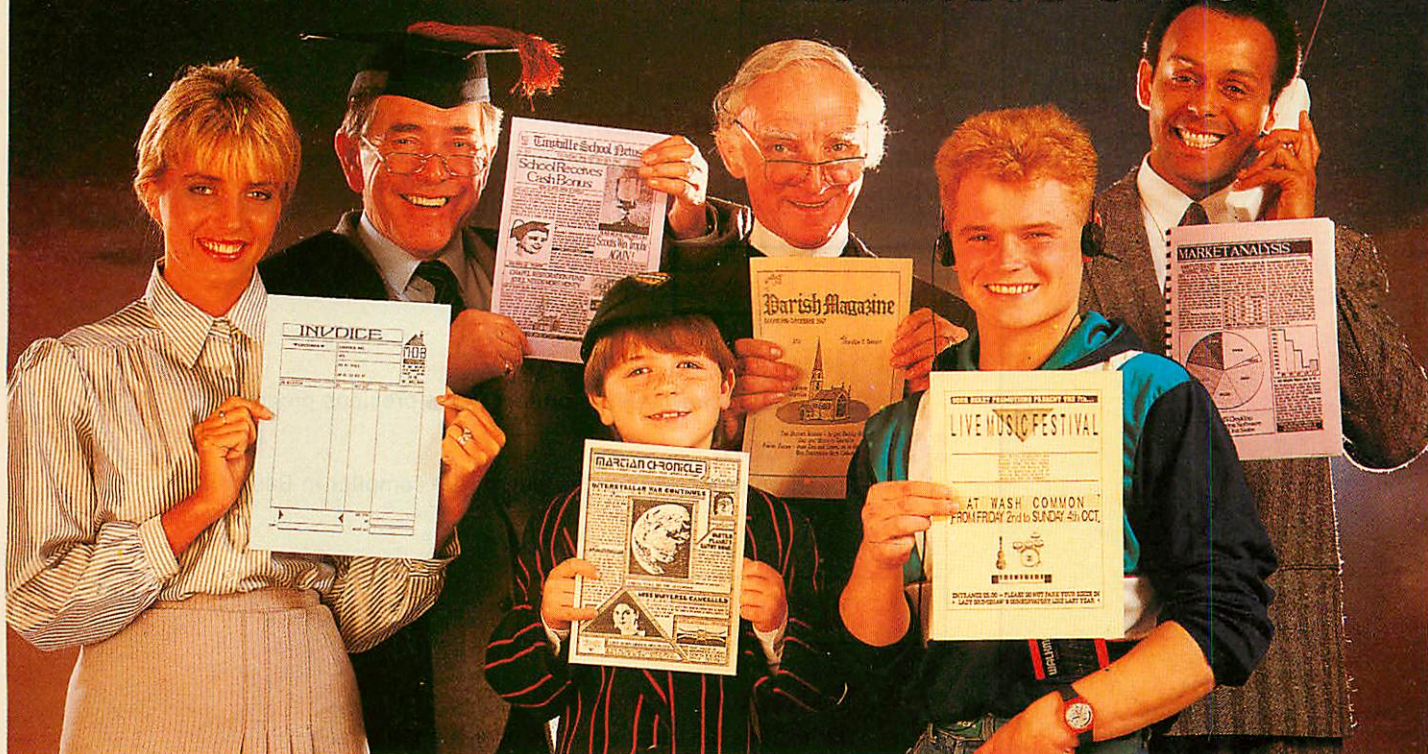

STOP PRESS

'Stop Press' puts you right at the heart of the Desktop Publishing Revolution. Utilising dynamic WYSIWYG (What You See Is What You Get) facilities, 'Stop Press' makes it simple to create professional newsletters, leaflets, flyers, forms or in fact anything where text and graphics are required.

'Stop Press' is the ideal publishing software solution for home enthusiasts, schools, societies and small businesses.

READ ALL ABOUT IT

Documents may be prepared using any of the superb selection of type-faces (12 or more) supplied or alternatively a typeface of your own design.

Text can be entered from within 'Stop Press' or imported from your preferred word processor with fully automatic on-screen text formatting as the file loads.

Centering, ragged right, and literal justification are all available. There also is full pixel resolution control over character size and spacing.

GRAPHIC DESIGN

As well as the ability to import digitised images there are outstanding facilities for drawing, spraying and painting using either the patterns supplied or your own pattern designs, enabling you to produce graphs, charts, diagrams and pictures.


These can then be pasted, cropped or re-sized to fit any layout, and for those finishing touches a fantastic zoom is available.

HOT OFF THE PRESSES

At anytime your pages can be previewed before being output to a wide range of Epson or compatible dot matrix printers.

AMX MOUSE

'Stop Press' can be used with a joystick or keyboard but the AMX MK III Mouse gives you the control and flexibility which you would expect from the most accurate pointing device available. Produced in Switzerland the AMX Mouse has a unique patented design which includes high resolution movement (D.P.I.) and superior ball technology to ensure that contact between the Mouse and surface is constant at all times.



EXTRA! EXTRA!

Complimenting 'Stop Press', Extra! Extra! is a superb collection of ready made clip art and new typefaces covering a wide variety of subjects and styles.

'STOP PRESS' IS AVAILABLE FOR	SOFTWARE ONLY	WITH AMX MK. III MOUSE	EXTRA! EXTRA!
ACORN BBC/B+/MASTER	£49.99	£79.99	£24.99
AMSTRAD PCW 8256/8512	£49.99	£89.99	—
AMSTRAD CPC 6128	£49.99	£79.99	£24.99
COMMODORE 64/128	£39.99	£69.99	—

These superb products are available from all good computer dealers or direct by cheque, Access or Visa. All prices include VAT, postage and packing. Become your own publishing baron with 'Stop Press' and start the presses rolling.

AMS

ADVANCED MEMORY SYSTEMS LIMITED

Imagination at your fingertips

FOR INSTANT ACCESS OR VISA ORDERS TELEPHONE: (0925) 413501.

ADVANCED MEMORY SYSTEMS LIMITED 166-170 WILDERSPOOL CAUSEWAY, WARRINGTON WA4 6QA.

TELEPHONE: (0925) 413501 TELEX: 628672 AMS G FAX: 0925 58039

TUBELINK ON MICRONET 800 *TUBELINK # SUPPORTS THE AMX MOUSE AND ALL AMS SOFTWARE





Vol. 6 No. 1 March 1988

Managing Editor
Derek Meakin

Group Editor
Alan McLachlan

Features Editor
Peter Davidson

Production Editor
Peter Glover

Assistant Features Editor
Steve Turnbull

News Editor
Mike Cowley

Technical Editor
Mike Cook

Promotions Editor
Christopher Payne

Reviews Coordinator
Pam Turnbull

Advertisement Manager
John Snowden

Advertising Sales
Peter Babbage, Gail Blincow

Tel: 0625 878888 (All depts.)

0625 879940 (Subscriptions)

Telecom Gold: 72:MAG001

Telex: 265871 MONREF G
Quoting Ref. MAG001

Prestel Mailbox: 614568383

Fax: 0625 879966

Published by:
Database Publications Ltd,
Europa House, Adlington Park,
Adlington, Macclesfield SK10 5NP.

Subscription rates for
12 issues, post free:

£15 — UK

£25 — Europe (incl. Eire)

£31 — Overseas Surface

£42 — Overseas Air



59,727

Jan-June 1986

ISSN 0265-4040

The Micro User welcomes program listings and articles for publication. Material should be typed or computer-printed, and preferably double-spaced. Program listings should be accompanied by cassette tape or disc. Please enclose a stamped, self-addressed envelope, otherwise the return of material cannot be guaranteed. Contributions accepted for publication will be on an all-rights basis.

© 1988 Database Publications Ltd. No material may be reproduced in whole or in part without written permission. While every care is taken, the publishers cannot be held legally responsible for any errors in articles, listings or advertisements.

The Micro User is an independent publication and neither the BBC nor Acorn Computers Ltd are responsible for any of the articles in this issue or for any of the opinions expressed.

News trade distribution: Diamond Europress Sales & Distribution, Unit 1, Burgess Road, Ivy-house Lane, Hastings, East Sussex TN35 4NR. Tel: 0424 430422.

CONT

Game

133 Down the Tubes

Futuristic plumbing in the world of leaks and droids.

Utilities

93 Hide and Seek

Use your sideways ram to protect those precious programs.

106 Minicom

Speed up graphics routines with a real compiler in Basic.

Reviews

31 Software Scene

Our experts cast a critical eye over the latest games releases.

39 OverView

Is the ultimate View package for the Master an anticlimax?

55 Ice King


Simplify the design and building of microprocessor circuits.

61 Genie Utilities

Getting more from the unique office data package from PMS.

68 Archimedes Review

We check out a computerised bank manager program to help handle your accounts with ease.

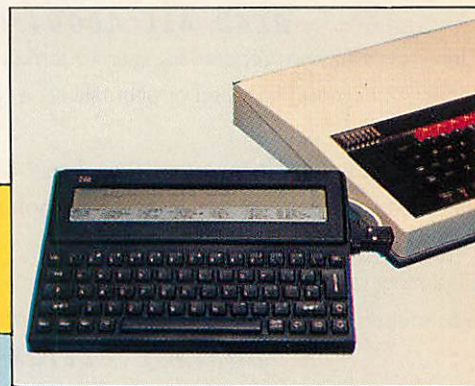

Z88 Section

47 Z88-BBC Archiving

Secure your valuable Z88 data with this superb utility.

50 Remote Computing

Get on line from anywhere in the world with your Z88.

53 Keep your Balance

A fun educational program to amuse youngsters — even in the car.

MICRO USER
CLASSIFIEDS

Save money on bargain
offers from fellow readers.
Turn to Page 156

ENTS

Features

7 News

All the latest in the ever-changing world of your BBC Micro.

24 Extra commands

We demonstrate how to extend the power of BBC Basic.

27 Laser Printer

An in-depth look into the powerful new printing technology.

36 Spirit of Adventure

Gain entry to the world of swords, sorcery and BBC Micros.

40 Library

High-quality routines for you to use in your own programs.

45 Archimedes Q&A

More questions about the new Acorn micro answered.

57 Innovation Award

A look at the remaining runners-up in the great 1987 competition.

58 Adventures

Dark doings in Hex, cleaning up in Suds, plus help and hints.

63 Problem Solved

More solutions to some of those mind-boggling hardware problems.

71 Communications

Bypassing pitfalls when linking your BBC Micro to an Archimedes.

87 Ceefax Guide

What's coming this month on the BBC's telesoftware pages.

119 Body Building

A simple add-on to turn your BBC Micro into a popular childrens' toy.

123 Programmers' Challenge

A new series to test your skill at problem solving and programming.

136 Hac Man

More Master conversions, plus helpful hints, tips and passwords.

150 Leaky Listings

Test your skill at program debugging in our new occasional series.

151 Letters

The chance to get your news, views, moans and name into print.

Education

81 Update

All the latest product news in the education world of the BBC Micro.


83 Going to Press

The trauma of turning children into newshawks – if only for a day.

89 Educational Software

Word processing for the young, plus technology in secondary education.

REPTON SPECIAL

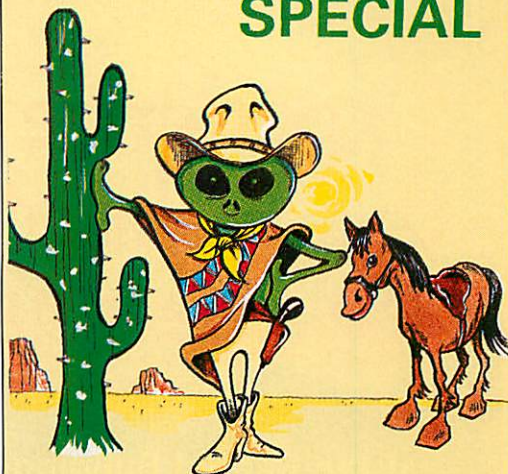


Straight from the lizard's mouth: All the facts, news and gossip in our cut-out and keep supplement.

Plus a great screen designer competition with £600 worth of Superior games to be won.

It's between Pages 72 and 77.

Fifth Birthday Competition and Survey

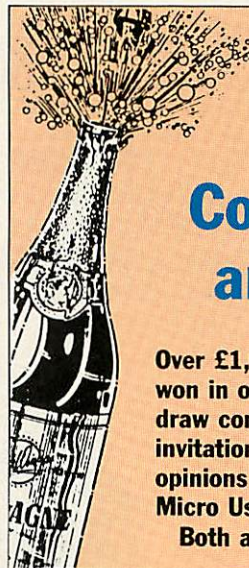

Over £1,000 of software to be won in our fifth birthday prize draw competition. And an invitation to make your opinions known with the great Micro User survey.

Both are on Page 97.

NEXT MONTH

GAME

Go for double top with darts

UTILITY

Designer pages for fax filers

GALLERY

Superb Archimedes screens

REVIEW

Low-cost Epson laser printer

**THE
MICRO
USER**

**April 1988
issue
on sale
March 2**

Experience the thrills of real-life adventuring



...at the Renold Building, UMIST,
Sackville Street, Manchester

10am-6pm Friday March 18
10am-6pm Saturday March 19
10am-4pm Sunday March 20

Of course you'll find the very latest software and peripherals for the complete Acorn range at the Electron & BBC Micro User Show. But there'll also be an exciting bonus:

Your personal passport to the fascinating world of adventuring!

- ★ Take part in real-life adventures and fight sequences under the expert guidance of Britain's top role-playing specialists.
- ★ Join in a tantalising treasure hunt for the young and young at heart.
- ★ Find solutions to all those vexing puzzles at our Adventure Advice Centre.
- ★ Take home prizes of the most popular adventure games for the BBC Micro and Electron.

It all adds up to a fantastic
day-out for all the family!



**IT'S SO
EASY
TO GET
THERE!**

BY CAR... AA signposting and ample car parking space nearby

BY COACH... Chorlton Street Station only a short walk away

BY RAIL... 300 yards from Piccadilly railway station

...and every advance ticket comes complete with a detailed map.

**Avoid the
queues!
Get your
ticket in
advance
— and
SAVE £1
A HEAD!**

YOUR ADVANCE TICKET ORDER

Admission at door:
£3 (adults),
£2 (under 16s)

Please supply:

— Adult tickets at £2 (save £1)
(Order four adult tickets,
get the fifth FREE!)

— Under 16s tickets at £1 (save £1)
(Order four under-16s tickets,
get the fifth FREE!)

☐ I enclose a cheque made
payable to Database Exhibitions

☐ Please debit my Access/Visa
card no:

Signed: _____

Advance ticket orders must
be received by Wednesday,
March 9, 1988.

£ _____

£ _____

Total £ _____

Expiry date: /



Renold Building
Sackville Street
Manchester
March 18-20, 1988

Post to: Electron & BBC Micro User Show Tickets,
Europa House, Adlington Park, Adlington,
Macclesfield, Cheshire SK10 5NP.

Name: _____

Address: _____

Postcode: _____

PHONE ORDERS: Ring Show Hotline: 0625 879920

PRESTEL ORDERS: Key *89 then 614568383

MICROLINK ORDERS: Mailbox 72:MAG001

Please quote credit card
number and full address MU2.88

A268

Acorn breaks into Japanese market

ACORN Computers has pulled off a major coup by winning an order from Japan for British computer technology.

The company is to install 40 BBC Master 128 micros linked by Econet for the Japanese Ministry of Foreign Affairs.

The system will be used to teach English to aspiring diplomats who will eventually work abroad.

Acorn is also supplying a Domesday system to give the Japanese students practical background on Britain today.

Although the deal is initially only worth £40,000, it has far-reaching significance for Acorn.

Firstly it opens the door to further contracts from the

Japanese Government which has a large requirement for English teaching technology.

Secondly, a vast number of language schools in Japan could now follow their government's example by buying Acorn equipment.

Acorn spokesman Michael Page told *The Micro User*: "Naturally we are delighted to have achieved a foot in the Japanese door – particularly as it has been accomplished in the face of some strong and impressive competition.

"We're confident that we can build further success in Japanese education markets from this starting point.

"A major factor in the breakthrough was the availability of a great variety of top

class educational software for our machines.

"The British Council establishment in Tokyo carries an extensive range of these programs and I'm sure the non-government language schools in Japan will now be inspired to take a look at it.

"The Domesday system created quite an impression at the Ministry of Foreign Affairs because of its ability to present a huge database of current UK information to their diplomats coming to this country.

"And of course it presents much of this information in colloquial English so that students can get a feel for English as it is used, rather than as it is taught".



Joseph Lambert

Micro check for Joseph

A **CONCERNED** father is hoping that an entry in *The Micro User Innovation Award 1987* will help with the treatment of his four-year-old diabetic son Joseph.

Greg Lambert of Suffolk rang *The Micro User* to enquire about the program – a runner-up in the competition – which allows a BBC Micro to monitor sugar levels and, where necessary, take action to remedy imbalance.

After contacting the author of the software – Barry Hall of Maidstone – *The Micro User* was able to provide Greg with a complimentary copy of the package.

"This will make it a lot easier for us to check Joseph's blood glucose levels and also with the aid of a daily graph we will be able to react to any inconsistencies immediately," he said.

The family's BBC Micro will now prove an invaluable aid to little Joseph's daily life, allowing him more time and freedom to indulge in his favourite activities.

One is raising money for research into diabetes, and after a sponsored climb of Ben Nevis last year which raised £2,500 Joseph is now looking forward to his next event.

Achimedes on line

MODEM specialist Dataphone has launched Deputy, the first comms package for the Archimedes.

Providing micro-to-micro linking facilities, it also permits users with suitable modems to access Prestel, MicroLink/Telecom Gold and similar systems supporting either viewdata or scrolling terminal type software.

The modem has been designed around the Dataphone Demon II and Designer modems, but will work with most communications hardware – including Pace and Miracle models.

When linked with Demon II or Designer modems, Deputy will give auto baud setting and a 300-number

memory for auto dialling – a feature also available when the package is linked to some other modems, including Magic and Apollo.

Other features of the package include the ability to work in Xmodem or CET formats for downloading and uploading software, and compatibility with almost any system running at any baud rate the user's modem can support.

Deputy allows viewdata frames to be saved to disc or printed with a single keystroke.

In terminal mode on systems such as MicroLink, calls can be recorded and reviewed at a later date. Deputy costs £55.40 from Dataphone (0733 230240).

THE HARD SELL

ACORN's new managing director, Harvey Coleman, has already made it clear that the company will be concentrating its attention on aggressive marketing in the coming months.

"The reputation that the company has for producing superb products is one that I shall proudly guard," he told *The Micro User*.

"But I am keen that those products should enjoy the commercial success they surely deserve.

"I shall be making it my priority to capitalise on the market leadership we hold in the education sector and to expand into other areas", he added.

Buy a Mitsubishi disk drive direct and you save more than money.


You're looking at a more economical and convenient way of buying a Mitsubishi disk drive. Because now you can order a 5¼" floppy disk drive from one of the world's leaders – direct from this page.

With prices that start from £99 (plus p&p) this will save you money. With only a walk to the post box involved it will save your soles too.

The four Mitsubishi disk drives offered here are all BBC Micro compatible. Each comes with a 2-year warranty from the manufacturer that's famed for reliability. And all are boxed and ready to plug into your system the moment they arrive.


So fill in the coupon here and return it with your remittance.

It's the direct route to a better disk drive.

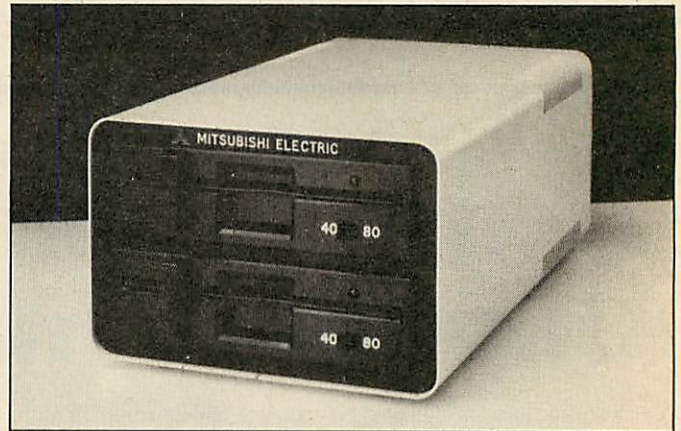

MITSUBISHI DISK DRIVES

Mitsubishi Electric UK Ltd.,
Disk Drives, Electronics Division,
Hertford Place, Maple Cross,
Rickmansworth,
Herts, WD3 2BJ

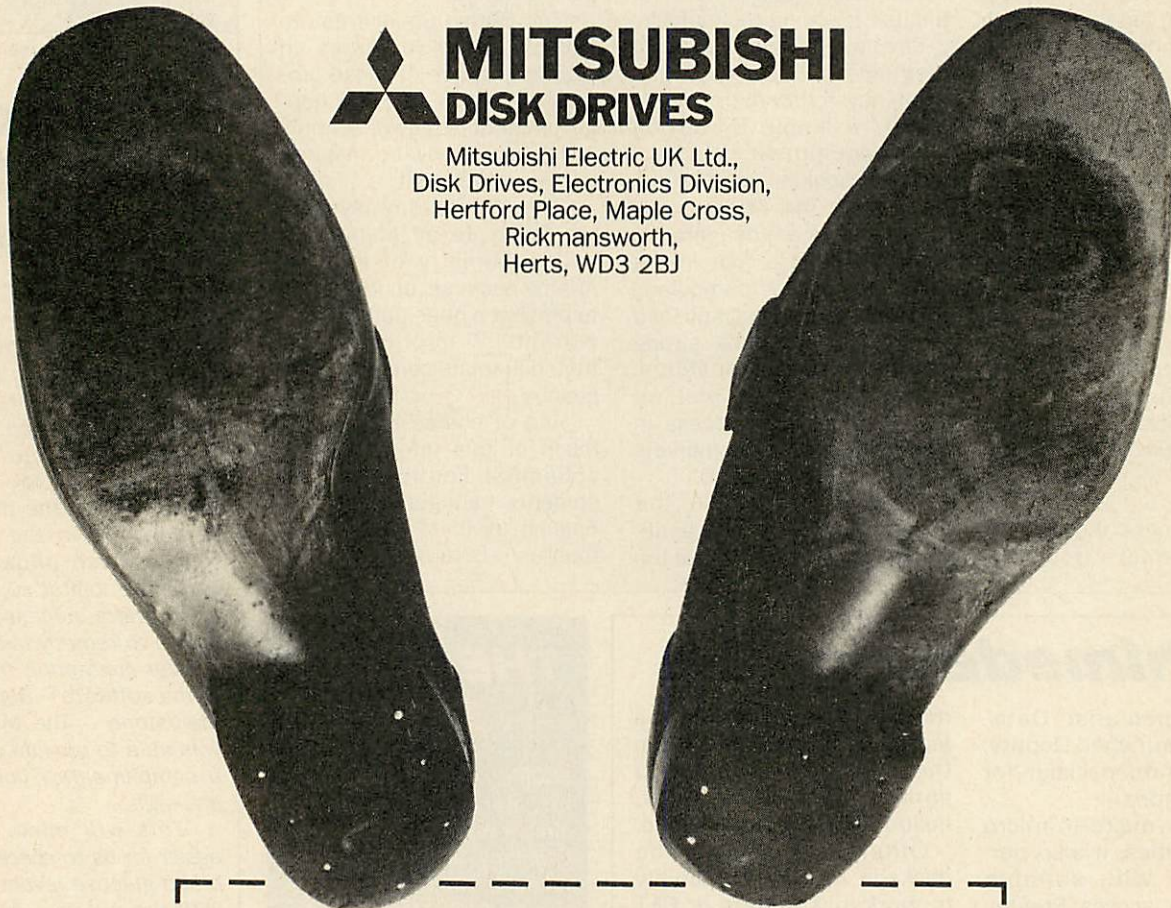

TO: Mitsubishi Electric UK Ltd., Disk Drives, Electronics Division, Hertford Place,
Maple Cross, Rickmansworth, Herts WD3 2BJ

Please send me (tick box applicable):

- | | | |
|--------------------------------|--------------------------|------------------|
| MF 50 DC Single Drive No PSU | <input type="checkbox"/> | £99.00 + £8 p&p |
| MF 55 DC Double Drive No PSU | <input type="checkbox"/> | £199.00 + £8 p&p |
| MF 50 AC Single Drive with PSU | <input type="checkbox"/> | £119.00 + £8 p&p |
| MF 55 AC Double Drive with PSU | <input type="checkbox"/> | £229.00 + £8 p&p |

I enclose a cheque/P.O. made payable to 'Mitsubishi Electric UK Ltd.'

Name: _____

Address: _____

Allow 28 days for delivery.

MU3

NEWS

The new roms keep rolling in

A SET of roms designed to enhance the use of Solidisk's 128k and 256k boards has been launched by Computer and Technical Services (0525 210706).

SideAid 128 and SideAid 256 have been designed to give both non-programmers and programmers full control of Solidisk shadow, ramdisk, roms and sideways ram.

A disc front-end menu is also included together with an easy-to-use MCOPIY facility allowing multiple files to be re-named and copied from one or more drives.

Both packages come complete with manual and cost £19.

★ ★ ★

AN upgrade to the Pineapple PCB drafting program is now available, along with a second rom which gives full automatic track routing capabilities.

Features include a file of component shapes, movement of shapes on screen, expansion or reduction of finished circuits. Printouts may be either 1:1 or 2:1 positives or negatives.

Pineapple (01-599 1476) says that the autorouting option, which comes on a separate 16k rom, will work on a standard unexpanded BBC Micro. Price £85 for the PCB program and £110 for the autorouting rom.

★ ★ ★

A SOPHISTICATED extension rom for View and Viewsheet spreadsheet called Doubleview has been announced by Tubelink (01-205 9393).

With Doubleview it is possible to work on two documents at the same time, and a cut-and-paste clipboard facility allows transfer of text from one document to another.

Other features include pop-up menus for View, ADFS commands, on-screen help information, and continual display of free memory, current file and printer driver names.

ARCHIMEDES SOFTWARE SALES ARE SOARING

IF software sales are any indication of a machine's popularity, the Archimedes has arrived.

One software producer who sees a particularly bright future for the Archimedes is Clares, and the company is already devoting much of its time and energy to developing products for the machine.

Managing director Dave Clare is particularly pleased with the success of Artisan and Graphics Writer, and of the Toolkit Module – "The Archimedes seems to be especially popular with programmers," he says.

"Education is set to explode

later in the year", he says, citing a welter of queries from educationalists – and not only in the UK.

Art departments in particular are seeing the Archimedes as the affordable graphics tool, especially with its dual Integrex and dot matrix colour printer support, but other departments too are adding the machine to their ranks of BBC Micros.

And if the rumour of the DES replacing existing BBC Micros in schools with Archimedes proves true, more software houses are going to be catering for the machine.

Archimedes software is

already attracting a "quite astonishing response" from overseas, with buyers from as far afield as New Zealand and the States, says Dave Clare.

In fact there has been "a lot of positive feedback", and Clares (0606 48511) has responded with Alpha-Base, priced at under £50 – the Archimedes equivalent of the BBC Micro's Beta-Base.

Fast and flexible – it's capable of sorting 50,000 records in little over a minute – Alpha-Base incorporates many users' suggestions and features often lacking in more expensive databases, though it is not programmable.

Clares' latest release, a utilities disc to complement Artisan, offers the facility to read the colour palette and adjust printed output for faithful reproduction – or even to adjust the on-screen colours before printing and to check the results by outputting a test strip.

Arcana lines up 3D title

SOFTWARE house Arcana is gearing up to release titles for the Archimedes later in the year.

The most likely candidate for the company's debut on the machine is Crater Wars whose 3D solid-filled graphics can use the Archimedes' enormous processing power to the full.

Arcana (0272 297162) is also looking at the possibilities of producing a version of PowerPlay, aiming it the primary school educational market as a fun-to-learn package.

PowerPlay, popular on the BBC Micro, already offers four languages – French, German and Spanish as well as English – and the facility for teachers to add their own questions.



THE continuing success story of Superior Software has led to another top-level appointment. Ralph Pearce (on the left with, MD, Richard Hanson) has joined the company as marketing executive, after a year in which Superior doubled its annual turnover – and held the number one spot in the BBC software charts for 51 weeks.

LEARNING BUSINESS

THREE business simulation packages for sixth form students, designed to form a graded trilogy in business dynamics, have been released by RBRC.

The first – Beat The Boss – is an introduction to the Fothergale business series. It acts as a learning-by-doing program in which making mistakes forms a critical part of the learning process.

With the Cement Business Game the user has to run a

fictitious company solving technical and technological problems.

The final package – Crisis Management – is the most sophisticated of the three. It involves running a company for five years.

RBRC (01-946 8641) says Crisis Management is an upgraded version of Beat The Boss but with additional decisions and a more delicate balance between resources and finance. Price £130.

FIGHT WORLD WAR I AGAIN

WORLD War I is about to break out again on the BBC Micro with the latest release from Lothlorien.

Historians have ascribed to Gavrilo Princip the blame for the chain of events that set in motion the first conflict declared to have been world-wide.

In this new wargame scenario you have the opportunity to change the colour of the world map, but you will have to be a skilled tactician to make any real mark.

The game can be controlled from different levels – strategic or tactical. It is also possible to control the Central Powers – Germany, Austria/Hungary and Turkey – as well as the Entente Powers – Britain, France, Russia, Belgium and Serbia.

Armies are made up of infantry, machine gun nests and artillery, with support from fleets of battleships and cruisers.

If the game is to be played from the strategic level you have to make clear the overall trend of your campaign. The action then proceeds without any further intervention.

Lothlorien (01-439 0666) says the strategic option is ideal for new players who want to see the way that war gaming works. Price £12.95.

Watford takes on the Z88



Nazir Jessa: "Ideal add-on to the Acorn range"

LEADING Acorn dealer Watford Electronics has taken on board another make of computer.

However, the decision to retail Sir Clive Sinclair's Z88 laptop is not seen as a betrayal of the traditional BBC Micro base by Nazir Jessa, Watford's MD.

"The Z88 is the ideal add-on to the Acorn range of computers as it uses BBC Basic", he said. "It further advances the power and versatility of an already excellent machine".

Watford Electronics has been selling the BBC Micro

since it first appeared six years ago and, until now, has consistently refused to retail any other machine.

Although Nazir Jessa takes a Z88 with him wherever he goes he freely admits that at first he did not like the machine: "When I first saw it I was not terribly impressed, but one of my staff asked me to try it out. As soon as I did I fell in love with it."

"Because it is compatible with my BBC Micro I can do work at home or wherever I am and then download files when I return to the office. It really is an excellent machine".

Archimedes section for Innovation '88

THE Micro User Innovation Award 1987 was the most dramatically successful computer-based competition ever organised in the UK.

More than 500 BBC Micro and Master users from all over the world competed for the prize of a £1,000 Archimedes, and the event aroused enormous interest in the national and regional media – not least because of the extremely high quality of the entries.

They came from people as diverse as senior lecturers and businessmen, medical consultants and helicopter pilots, engineers and schoolboys.

Now *The Micro User* has announced the Innovation Award 1988 – an even bigger and better competition than

last year's. Instead of being restricted to BBC Micro and Master owners, this year there will be a special section for Archimedes users.

In announcing *The Micro User* Innovation Award 1988, managing editor Derek Meakin said: "Not only ourselves but the entire industry was amazed by the response in 1987."

"The number of entries was staggering, and they reached incredible heights of diversity and ingenuity."

"I'm sure this standard will be at least maintained – if not surpassed – in 1988".

Further information about *The Micro User* Innovation Award 1988, and how to enter, will be published in next month's issue of *The Micro User*.

The chip designers use BBC

STUDENTS on a two-year computer science course at Cambridge University are producing designs for computer chips with the help of 30 BBC Micros.

The computers are being used as low-cost graphics terminals linked to a main-frame running Qudos Quickchip software.

After just eight hours of lectures and eight two-hour practicals, students are able to design their first silicon chips. Working prototypes are then produced by Qudos within a single term.

Chip design has been voted the most popular course of the year by many computer science undergraduates.

Host of new products going to the show

THERE will be no shortage of things to do, see and buy during the Electron & BBC Micro User Show at UMIST, Manchester, March 18 to 20.

Many of the more than 70 exhibitors have already released details of the new products and bargain offers they are bringing along to the show.

Slogger is introducing Challenger ADFS which runs on the Challenger system from Opus. It normally retails at £34.50 but will be on special offer at the show.

Dabs Press is launching a printer driver rom called HyperDrive. It has NLQ printing, on screen printer effect, 80 star commands to control printer

effects and costs £29.95.

Micronet has a new modem called ProPak which is priced £199.

AVP Computing is launching Pixel Perfect, a desktop publishing package the company claims is unique in having a 120-character true A4 width output and typefaces produced on a 48 x 48 grid.

Hybrid Technology will be showing its Music 2000 interface. This allows Midi-equipped instruments into the Hybrid Music System so that they can take their seat in the orchestra alongside the Music 5000. Simple selections send whole

Turn to Page 13 ►

RISC USER

THE ARCHIMEDES MAGAZINE AND SUPPORT GROUP

A BRAND NEW SUPPORT
GROUP HAS BEEN
LAUNCHED
FOR THE ACORN
ARCHIMEDES COMPUTER



RISC USER

is written by an experienced team of Archimedes enthusiasts with roots in education, home computing, and over 5 years experience with the BBC Model B and Master computers with BEEBUG magazine. So popular is BEEBUG that membership exceeds 20,000 worldwide.

RISC USER

provides lively and informed coverage of what's happening in the world of the Archimedes. Reviews, hints, programs and articles are specifically written for the Archimedes, showing how to exploit the many features of this sophisticated computer. RISC USER has material of direct use to education, business, industry and home computing.

RISC USER

includes a well balanced selection of the latest news from Acorn and other major suppliers, pre-release reviews of the latest software and peripherals, as well as editorial features, ideas, hints and tips, readers letters and much more. RISC USER is published 10 times a year and is only available on subscription.

RISC USER

subscription also gives you free access to our technical support team who may be contacted by phone or letter. This team of experts will endeavour to resolve any software or hardware problems that you may have, and will also provide unbiased advice. RISC USER is also an Acorn appointed Archimedes Support & Service Centre should you need repairs etc.

This is what you have missed by not subscribing yet:

Saving and Loading Screens
Archimedes Disc Menu
Multi-tone Printer Dump
Using SOUND and VOICE
Musical Compositions
Using Aliases

- Configuring Archimedes
- Using Libraries
- Hints and Tips
- Series One Operating System
- Using Fonts
- Memory Editor

Reviews of: Logistix, System Delta Plus
Artisan. Acornsoft ANSI C. Graphic Writer. PC Emulator and more

RISC USER SUBSCRIPTION RATES

1 year UK, BFPO & Channel Islands	£14.50
Europe & Eire	£20.00
Middle East	£24.50
America & Africa	£27.00
Elsewhere	£29.00

I Would like to subscribe to RISC USER
and enclose a cheque for: £_____

Official orders welcome

Please debit my Access/Visa/Connect account with
£ _____

Card Number

[illegible]

Expiry _____ /


Name _____

Address

Signature _____

Post to: RISC USER, Dolphin Place,
Holywell Hill, St. Albans, Herts AL1 1EX
Or phone 0727 40303
Official Orders welcome
Phone 0727 40303 for more information

One Full Year for just £14.50

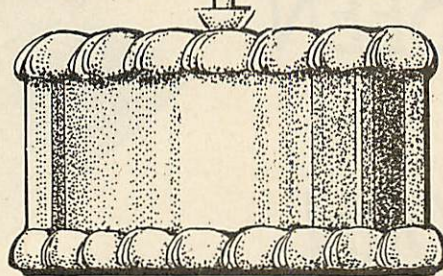

We are specialists on the BBC Micro, Master and Compact computers, established in April 1982 following the launch of the original BBC Micro.

For £14.50 we will provide you with:

Free access to our technical support team (by phone or letter), to give impartial advice and help on any computer, hardware or software problems that you may have.

72 page magazine mailed directly to you ten times a year. This will keep you up to date with news, reviews, hints and programs for your computer.

Quality, free programs for you to type in (also available on tape/disc) covering everything from printer buffers to windows & icons.

A swift mail order service for all your hardware & software needs at competitive prices, with a further 5% discount to you as a member.

A showroom to try out the latest peripherals and software with absolutely no obligation, and with knowledgeable staff on hand.

Free personal adverts in the magazine to sell your unwanted kit. Second hand BBC micros. A trade-in scheme to upgrade to a Master or Archimedes.

Join 20,000 satisfied members!

All New Members Will Receive A Special Welcome Pack Including:

- 68 page booklet packed full of information and program listings
- Quick reference card to your computer
- Handy function key strip & screen planning sheets

- Plus a booklist, software catalogue, local user group list, magazine indexes etc.
- And of course your personal membership card & the latest magazine

NATIONAL USER GROUP FOR THE BBC MICRO, MASTER & COMPACT

INFORMATION
NEWS
REVIEWS
FREE PROGRAMS
INTERESTING ARTICLES
ADVICE
TECHNICAL HELP
10 MAGAZINE/YEAR

I would like to enrol as a member of BEEBUG for 1 year and receive the next 10 issues of BEEBUG magazine.

Your Machine

Model B/B+

Master 128

Master Compact

EITHER Post today to:

BEEBUG, Dept MU3

Dolphin Place, Holywell Hill,

St. Albans, Herts AL1 1EX

OR Phone St. Albans

(0727) 40303

Please tick

I enclose £ (enter correct amount*) OR Please debit by Access/Visa Account £

Card Number

OFFICIAL ORDERS WELCOME

Card Expiry Date

SURNAME

INITIALS

TITLE

ADDRESS

POSTCODE

SIGNATURE

*SUBSCRIPTION RATES

UK, BFPO, CI	£14.50
Rest of Europe	£20.00
Middle East	£25.00
America & Africa	£27.00
Elsewhere	£29.00

All payments MUST be in pounds sterling. Cheques MUST be drawn on a UK bank.

**FOR A FREE BEEBUG
INFORMATION PACK
PHONE 0727 40303**

Start your year here!

NEWS

Graphics on video

A NEW podule for the Archimedes — Chromalock, from Wild Vision — is a genlock and full colour overlay system which allows the BBC Micro's graphics to be superimposed on to a video picture.

The package is already attracting considerable interest from professional and educational users, says Wild Vision (091 281 8481). Captions, titles, animation and so on can be overlaid on to the picture during editing, or superimposed in real time on to the signal from the camera.

Interactive video systems can also use the Chromalock, with a normal PAL composite video monitor, to display computer graphics over the

pictures from a video disc.

A stable genlock circuit with fast response time enables Chromalock to lock on to any reasonably stable PAL/CCIR standard video signal, and it also encodes the micro's RGB output into a PAL signal, with wideband full fidelity colour encoding.

Chromalock is available for the Archimedes, Master 128 and Model B or B+ Micros.

Standard versions are priced at £265 for the Archimedes and £245 for other models while higher performance podules are £355 and £335 respectively.

Prices for the genlock only, and no overlay system, are £155 and £140.

FROM PAGE 10

parts or single voices to individual Midi instruments including a drum machine.

Information Education will be displaying the latest Viewbook stories and the Viewbook Oxford Children's Dictionary.

Meedmore Distribution will be demonstrating and selling the latest Nidd Valley Mouse software package Illustrator and Illustrator Paintbox. This graphics design suite is packed with powerful features for the production of high-resolution desktop graphics. Full-colour design is supported in any of the graphics modes 0,1,2,4,5. Meedmore is also showing 7 Art for Mode 7 mouse graphics design.

Zonefour has promised an amazing total of no fewer than 120 new peripherals from dust covers to computer service kits. The firm is offering its entire catalogue at trade prices during the show.

From PMS comes Genie Junior, a set of utilities comprising desk diary, notepad, address book and phone book, price £9.95.

There will be plenty of action on the Archimedes front too.

Characters up to 6in high are possible with Signwriter from Wight Scientific, priced under £80. The firm is also launching a BBC Micro utility

— Label Writer, price £10 — and selling a full range of colour ribbons for £5.

Educational software house LCL is launching its first Archimedes packages. Micro English, Micro Maths and Micro French are GCSE courses and Mega Maths is an A Level course. Each contains 24 programs and comes with support literature and voice tapes. They are on offer at a special show price of £19, a saving of £5.

Apart from the wide choice of new products, there's a particularly magical atmosphere to this show.

That's due to the presence of the Spirit of Adventure group, a bunch of enthusiasts who meet to act out mediaeval quests.

They will be at UMIST disguised as wizards, goblins, minotaurs and zombies. Visitors will get the chance to play the hero or heroine in their adventure simulations.

This means the chance to battle against magical forces, dragons and other monsters and maybe win a prize in the treasure hunt.

All this plus the constant availability of some of Britain's top BBC Micro experts who will be on hand to answer your technical questions.

A money-saving advance ticket order form is on Page 6.

THE
GALLUP
CHART

TOP 20
BBC SOFTWARE

THIS MONTH	LAST MONTH	TITLE (Software House)	TAPE PRICE
1	5	LIFE OF REPTON <i>Superior</i>	6.95
2	1	PLAY IT AGAIN SAM <i>Superior</i>	9.95
3	10	LEAGUE CHALLENGE <i>Atlantis</i>	2.99
4	3	GRAND PRIX CONSTRUCTION SET <i>Superior</i>	9.95
5	•	STAR WARS <i>Domark</i>	9.95
6	7	SPITFIRE 40 <i>Mirrorsoft</i>	9.95
7	•	WINTER OLYMPIAD <i>Tynesoft</i>	9.95
8	4	SURVIVORS <i>Atlantis</i>	2.99
9	2	PALACE OF MAGIC <i>Superior</i>	9.95
10	•	SPELLBINDER <i>Superior</i>	9.95
11	•	COMPUTER HITS 4 <i>Beau Jolly</i>	9.95
12	6	CRAZEE RIDER <i>Superior</i>	9.95
13	•	BONECRUNCHER <i>Superior</i>	9.95
14	9	PAPERBOY <i>Elite</i>	9.95
15	•	FIVE STAR GAMES 3 <i>Beau Jolly</i>	9.95
16	•	SUPERIOR COLLECTION VOL 1 <i>Superior</i>	9.95
17	•	ELIXIR <i>Superior</i>	9.95
18	12	AROUND THE WORLD IN 40 SCREENS <i>Superior</i>	6.95
19	13	RANSACK <i>Audiogenic</i>	9.95
20	8	SPY VS SPY <i>Tynesoft</i>	9.95

Compiled by Gallup/Microscope


Life of Repton jumps ahead of Play it Again Sam this month, while eight new entries gives an indication of the number of titles available. Highest newcomer is Star Wars, of film and arcade fame — read the review in this issue of *The Micro User*.

Build your own system...

with the Minerva SYSTEMS DELTA, GAMMA and SIGMA
Individual programs designed to integrate; use separately or link together to form a powerful business system. Systems Delta, Gamma and Sigma... designed by highly acclaimed professional programmers with proven ability on the BBC, now providing definitive software for the Archimedes.

DATABASES

System DeltaPlus and WIMP Card Index £69.95
The ultimate in simplicity and flexibility. Unrivalled in power. Vast capacity including 2 billion records, 16 million fields. 4.2 billion subset possibilities, multiple files open at once, etc. Operates within the window environment.

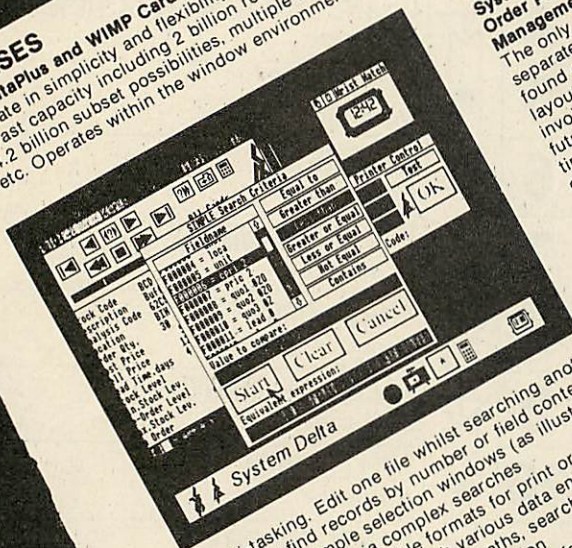

- Multi-tasking. Edit one file whilst searching another
- Instantly find records by number or field content
- Search by simple selection windows (as illustration)
- Multiple user-definable formats for print or display
- Simple card creation with various data entry types
- Unrivalled, comprehensive formats for print or display
- Mailing labels, yet simple reporter facility
- Comprehensive, yet simple reporter facility
- Card copier to transfer records across files
- Imports data from dBase, Lotus, Viewstore, etc.
- Includes relational programming language, if required

System Delta with Card Index £64.95
Still the most comprehensive and flexible data management system on the BBC. 8160 records, 255 fields, 8000 characters per record. 8 subjects. Up to 5 files open at any time. Find any record in 3 seconds. Extensive single or multiple criteria searches, sorts and maths facilities. Multiple print formats. Default card. Card copier for transfer between files. Fully programmable relational system with over 150 commands.

Mailshot, Reporter and Inter/View Link £19.95 each
Three versatile support programs for use with all System Delta files. Mailshot produces up to 4 across labels and links with wordprocessors for mail-merged documents. Reporter produces simple lists as well as fully definable reports including negative or positive columns, averages, totals, headings, sub and sub-sub-totals. Inter/View Link transfers data directly or as a result of any calculation including sum, average, count, etc.

System Delta Personal Accountant £45.95 each module
Five comprehensive accounting modules for use separately or as integrated suite. Many advanced features as listed above. Total flexibility allows customisation if required.

Order Processing/Invoicing, Sales Ledger, Stock Management, Purchase Ledger, Nominal Ledger

School Administrator £69.95
Pupil and staff records allow extra fields to be added if desired. Entry reports for examination boards. Form 7 DES statistics, etc.

Specialist Applications from £54.95
Comprehensive management programs for Hotelier, Video Rental and Newsagent.

System Gamma £49.95
The first Graphics Management System. Anyone can produce stunning graphics and charts easily from the menu driven GammaPlot supplied. Multiple charts on screen at any one time and in any position desired. On screen text editorial. Several fonts provided for variable text. Statistical analysis. Macro facility. Entry by keyboard or System Delta files. Fully programmable to create your own graphics programs.

SPECIALIST APPLICATIONS
Flexible specialist software available for School Administrator, Video Rental, Newsagent, Hotelier (Genealogy, Timetabling coming early 1988)

GAMES
Minotaur Game £14.95
3D maze game. Fast reactions not needed. Create maze to your own size. Survive to rescue the men and kill the Minotaur.

Send for full brochure including other products




MINERVA SYSTEMS

69 SIDWELL STREET · EXETER · DEVON EX4 6PH · TELEPHONE EXETER 0392 37756

International Distributors in Africa, Australia, Belgium, Canada, Cyprus, Greece, Holland, Hong Kong, Iceland, New Zealand, Malta, Norway, Portugal, Sweden, U.A.E.

SPECIAL OFFERS FROM VIGLEN

PANASONIC PRINTER KIT

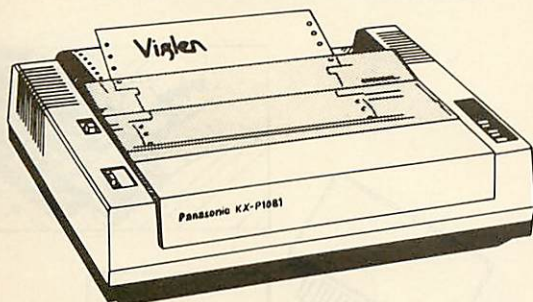

The Panasonic KX-P1081 come complete with £45.00 worth of accessories FREE including tractor feed and roll feed units with paper, printer cable, and a specially designed metal printer stand. Features include:


- ★ 120 cps draft printing 24 cps NLQ
- ★ IBM and Epson compatibility through dip switch settings
- ★ Prints 80 columns on A4 cut sheets, continuous stationery or roll paper 9 x 9 draft and 18 x 23 NLQ

Stock Code	Description	Price inc. VAT
SP079	Panasonic KX-P1081 plus accessories	£185.95

Please add £8 for insured courier delivery.

MEGA BYTES FOR MINI BUCKS

NEW LOW PRICES

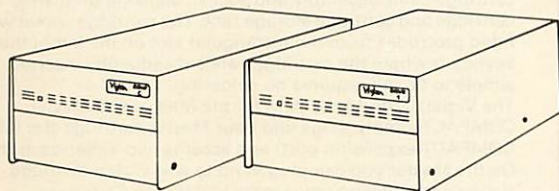

Plug in 20 to 112 Megabytes of extra storage with the Viglen Winchester system.

The Viglen Winchester is ready to plug in and use on a BBC Master micro; for a BBC B or B plus you will merely need to fit the Acorn ADFS Rom. The Winchesters are 100% compatible with the Acorn Winchester and Acorn ADFS and will also work with the Acorn Master 512 board with DOS plus.

Drive 1 Winchesters are also available for backup or just more storage and simply plug into the back of the Drive 0 unit.

The Winchester package consists of: Winchester unit (cased with controller boards, power supply and fan), Master reference Manual part 1, Winchester user guide and Winchester utilities on disk (such as formatter, verifier, ADFS menu and sophisticated backup program allowing you to make fast backups on DFS disks, ADFS disks or Drive 1 Winchester).

Stock Code	Description	Price inc. VAT
Drive 0 Single		
SP0150	VB20 20Meg Viglen Winchester	£499.00
SP0152	VB28 28Meg Viglen Winchester	£519.00
V155	VB40 40Meg Viglen Winchester	£799.00
V156	VB56 56Meg Viglen Winchester	£899.00
Drive 1 Second Drive		
SP0160	VB120 20Meg Drive 1 Winchester	£479.00
SP0162	VB128 28Meg Drive 1 Winchester	£499.00
V165	VB140 40Meg Drive 1 Winchester	£739.00
V167	VB156 56Meg Drive 1 Winchester	£769.00
V157	20MB Tape Streamer Backup	£689.00
V503	Acorn ADFS Rom and Manual	£29.95
(Only necessary for BBC B or B Plus)		


Please add £8 for insured courier delivery.

Available for use with SJ research file server at no extra cost, please specify when ordering.

WINCHESTER

FROM
£99.95
inc. VAT

The finest Japanese disk drives (not Taiwanese imitations) available at the lowest prices.

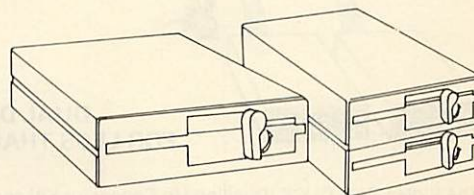

All disc drives are supplied with a manual, packed utilities disc and a full 12 Months warranty (2 Year Warranty available) and are ready to plug in and use on a BBC B (fitted with a DFS) B + or Master micro. 40/48 Track drives have a switch which enables operation in either 40 or 80 track mode.


The capacity quoted are given in single density mode; for double density mode (1770 DFS + ADFS as in the Master) the capacities should be approximately doubled.

An integral power supply is not necessary as the disc drives run from the micro's power source however should you require drives with their own power supply, these are also available. If your BBC B micro does not have a DFS fitted then you will also require the Acorn dfs kit. These are available from Viglen.

Stock Code	Description	Price inc. VAT
SP014	400K Single Drive 40/80T	£99.95
SP030	400K Single Drive 40/80T + PSU	£109.95
SP019	800K Dual Drive 40/80T	£189.95
SP020	800K Dual Drive 40/80T + PSU	£209.95
VPD0240	100K Single Drive	£105.95
VPD0241	400K Single Drive 40/80T	£113.00
VPD0242	200K Dual Drive	£195.95
VPD0243	800K Dual Drive 40/80T	£219.00
VPD0245	100K Single Drive + PSU	£119.95
VPD0246	400K Single Drive + PSU	£135.00
VPD0247	200K Dual Drive + PSU	£209.95
VPD0248	800K Dual Drive 40/80T + PSU	£235.00
VPD0249	800K Dual Drive 40/80T + PSU in Metal Bridge Unit	£265.00
V0060	3.5" 400K Single Drive	£95.95
V0061	3.5" 800K Dual Drive	£199.95
V0062	3.5" 400K Single Drive + PSU	£135.00
V0063	3.5" 800K Dual Drive + PSU	£199.00
V0064	3.5" and 5.25" 800K Dual Drive	£219.00
V0065	3.5" and 5.25" 800K Dual Drive with PSU	£249.00

Please add £8.00 for insured courier delivery.

DISK DRIVES

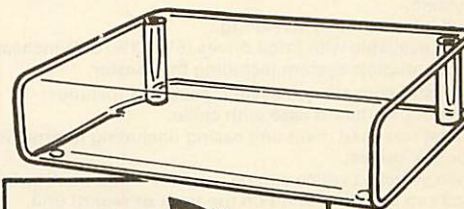

TABLE

CLEAR PERSPEX PRINTER STAND

The Viglen printer stands are beautifully finished in clear perspex and raise the printer high enough to put continuous stationery underneath.


Stock Code	Description	Price inc. VAT
V490	80 Column Printer Stand (15" x 13" x 3.5")	£19.95
V491	136 Column Printer Stand (23.5" x 13" x 3.5")	£29.95

Please add £3 P & P

PRINTER STANDS

SPECIAL OFFERS FROM VIGLEN

DUCKS



DUAL DRIVES FOR LESS THAN £17!


The Viglen Data DUCK (Duallying Up Connector Kit) converts any two single drives to a dual drive instantly. Simply plug the duck into the micro's disk drive socket and plug two single drives (any type and any make) into the duck to obtain a dual drive system accessed as drive 0 (and 2 if double sided) and drive 1 (and 3 if double sided). If neither single drive has its own power supply then you will require a Viglen power DUCK in order to obtain two disk drive power sockets from the micro.

- ★ No soldering simply plugs in.
- ★ No need to take disk drives apart to change links.

Stock Code	Description	Price inc. VAT
V084	Viglen data duck	£16.95
V085	Viglen power duck	£7.95

Please add £2.50 for P & P.

MASTER TRANSFORMATION

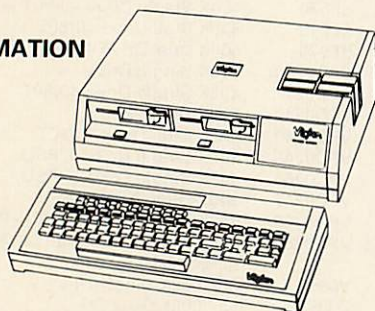

Give your BBC Master micro the professional PC look by replacing your existing lid with this smartly styled package. The system is strong and constructed in high impact ABS colour matched to the BBC Master and it gives your Master a very neat and impressive look.

- ★ Will support monitors including up to 16" TV.
- ★ Can house two 5¼" disk or Winchester drives.
- ★ Capable of housing 3½" drives.
- ★ Will accept Acorn cartridges and the Viglen Master Cartridge system.
- ★ Full internal metal screening.
- ★ Also available with fitted drives (5¼", 3½" or Winchester) or as a complete system including the Master.

The Master console unit system packages includes:


- ★ Remote Keyboard case with cable.
- ★ Metal screened main unit casing (including internal fittings for 5¼" drives).
- ★ Two switches which can be used for 40/80 track switching and can be either fitted on the front or rear of unit.
- ★ Two blanking plates to blank out any drive aperture that is not used.
- ★ Full labelling kit.
- ★ Fully illustrated fitting instructions.

Stock Code	Description	Price inc. VAT
V861	Viglen Master Console unit	£59.95
Accessories for the Master Console unit		
V853	Dual Drive data cable for console unit	£9.95
V854	Dual Drive power cable for console unit	£7.95
V855	Power supply for the console unit	£34.95
V866	Fan Kit for console unit	£34.95
V858	Fitting bracket for 3½" drive	£8.95
V851	Viglen Professional Console Unit for the BBC micro	£49.95
	Fitting service available from	£15.00

Please add £8 for insured courier delivery.

CONSOLE SYSTEM

VIGLEN ROM CARTRIDGE SYSTEM

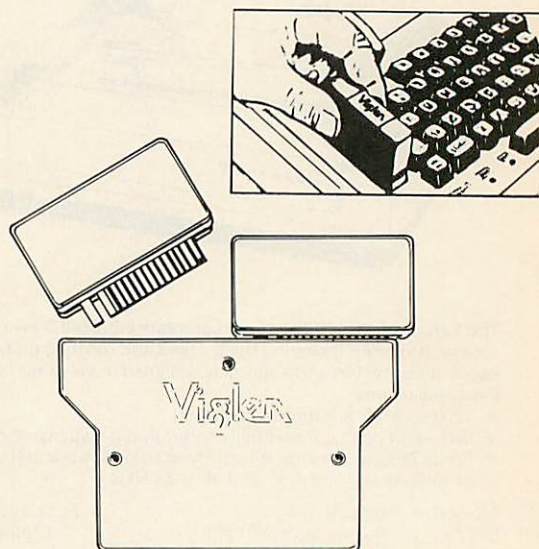

Having fitted the Viglen Rom cartridge system to your BBC, Master or Master COMPACT, you can plug in your Roms/Eproms simply by inserting each one in a Viglen cartridge and plugging in whichever cartridge you want to use. The same Viglen cartridge can be used on all the micros mentioned and there is no need to switch the micro on and off between cartridge changes.

The Viglen cartridge system for the BBC micro consists of the cartridge cable assembly and socket, blanking off plates, 1 cartridge and cartridge storage rack. The cartridge socket when fitted protrudes from the rectangular slot on the left of the keyboard where the cartridges are subsequently inserted. It is simple to fit and requires no soldering.

The Viglen cartridge system for the Master and Master COMPACT simply plugs into your Master cartridge slot (or COMPACT expansion port) and accepts two Viglen cartridges. On the Master you can plug in up to two Viglen cartridge systems thus giving you access to 4 Viglen Cartridges simultaneously. The system comes complete with 2 cartridges and cartridge storage rack. On the Master you can also use Viglen cartridges which have 32 and 64K paged Roms inserted.

Stock Code	Description	Price inc. VAT
V560	Viglen Rom cartridge system for BBC	£12.95
V559	Viglen Rom cartridge system for BBC (low profile)	£12.95
V550	Viglen Rom cartridge system for Master	£14.95
V551	Viglen Rom cartridge system for COMPACT	£14.95
V561	Single Viglen cartridge	£3.45

Please add £2.50 P & P (£00.50 for single cartridge).

CARTRIDGE SYSTEM

**LOOK FOR
OUR AMAZING
SPECIAL OFFERS**

Acorn 
Authorised Dealer


SPECIAL OFFERS FROM VIGLEN

- ★ FRONT PANEL SWITCHING
- ★ 800K DUAL DRIVES 40/80T WITH PSU

Direct disk drives are manufactured to the highest standard using high quality Japanese mechanisms. All drives are supplied complete with user manual and utility diskette.

Stock Code	Description	R.R.P.
SP0249	800K Drive in Bridge Unit with PSU	£229.95

SPECIAL OFFER
£229.95 Inc. VAT

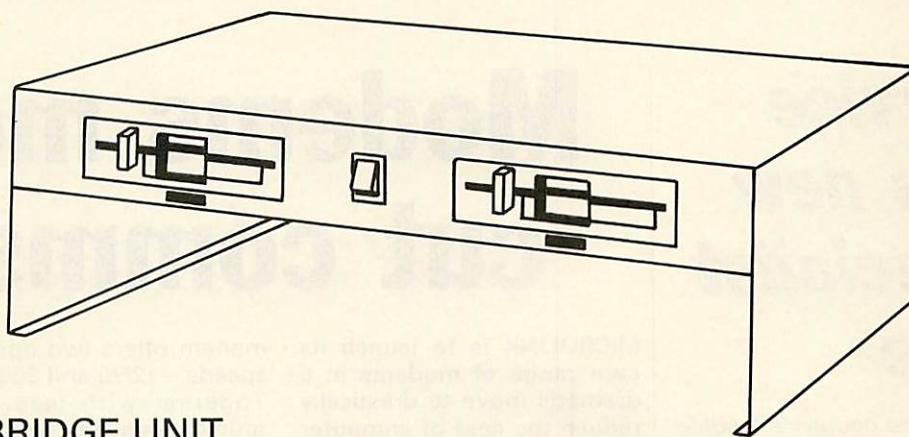

DIRECT MASTER BRIDGE UNIT


DISK DRIVES

Viglen

Viglen Ltd.,
Unit 7
Trumpers Way
Hanwell, London W7 2QA
Telephone: 01-843 9903
Telex: 919 304 VIGLEN G
Fax: 01-574 5126

Acorn
Authorised Dealer

Prices correct at time of going to press
and offers are subject to availability



HOW TO ORDER

Simply fill in the coupon or write to us with your requirements enclosing a cheque/postal order or your credit card no. for the total amount. Don't forget to add the cost of delivery. Allow 7 to 10 days for delivery. Credit card holders may order by telephone on our sales hotline 01-843 9903 (8 lines). Orders from overseas should be exclusive of VAT (please deduct 15% from the total cost).



**Dealer and Trade
Enquiries Welcome:**

OFFICIAL ORDERS

Official orders from education establishments, Government departments and Plc companies accepted. Viglen has a special education department to process orders and queries from schools, colleges, universities and Local authorities so please ask for our education department when you call. Being one of the major suppliers to the Education market, the experienced Viglen team will be able to understand and help you with your requirements.

Showroom opening hours
Monday to Friday 9.30 to 5.30
Saturday by appointment

Fill in and post to Viglen Ltd., Unit 7, Trumpers Way, Hanwell, London W7 2QA. Tel. No. 01-843 9903. Please make cheques and postal orders payable to Viglen Ltd.

STOCK CODE	DESCRIPTION	QUANTITY	TOTAL PRICE

Please find enclosed a cheque/postal order ☐ *
I prefer to pay by VISA ☐ * ACCESS ☐ *
* Tick one please.

Carriage _____
Total _____

Card No. _____ Signature _____ Expiry date _____
Name _____
Address _____
Postcode _____ Tel. No. _____



NEWS...NI

Service has new specialist role

ONE of the country's leading learned societies has joined MicroLink.

The British Psychological Society has nearly 12,000 members and is involved with government, the health and education services, academic institutions and other organisations here and abroad.

Last year its charter was changed to allow it to maintain a register of chartered psychologists which the general public will soon be able to consult.

This gives the country a new breed of chartered specialists whose education and professional conduct the BPS oversees.

The society is no stranger to the benefits of electronic mail. For some time its members who work in academic institutions have been communicating via JANET, the Joint Academic Network.

By joining a more widely-used service like MicroLink, BPS members working in all areas of psychology can now communicate faster and more efficiently with the Society's offices in Leicester.

In addition the society's extensive business activities, which include publications and software, will be enhanced by MicroLink Email and telex facilities.

Modems move will cut comms costs

MICROLINK is to launch its own range of modems in a dramatic move to drastically reduce the cost of computer communications.

At the same time it says it wants to demystify the process of going online by including with each modem easy-to-use communications and word processing software specially tailored for a specific machine.

First MicroLink Communications Packs that have been announced are for the PC and BBC Micro.

The MicroLink dual-speed

modem offers two operating speeds – 12/75 and 300 baud. Together with lead, communications and word processing software, it costs £99.

The top-of-the-range MicroLink multi-speed modem includes the faster 1200/1200 baud. It is fully Hayes-compatible and in addition offers many sophisticated functions such as auto-answer and auto-dial. Also with lead and software package, it costs £169.

A unique feature of both packs is that purchasers will be entitled to one month's

unlimited use of Britain's most popular electronic mail service, Telecom Gold.

They will be given free registration on MicroLink/Telecom Gold, allocated their own Telecom Gold mailbox and be allowed one month's free connect time to the service.

"This is not just a demo mailbox as on Prestel, which is restricted to demonstrating what is available, but a personal, password-protected mailbox which can be used for sending and receiving messages via electronic mail and directly accessing a host of other services", said MicroLink head Derek Meakin.

"This is the first time free access has ever been offered to a public Email service. But we feel it is only right that newcomers to communications should be encouraged to freely explore this vast database at their leisure and find out for themselves all the exciting things it contains".

For BBC users, the software accompanying both modems is a special adaptation of the communications and word processing modules from the award-winning Mini Office II package.

"The intention is that you have everything you need in one pack", said Derek Meakin. "All part of our aim to simplify communications for everyone".

BUSINESS BULLETIN BOARD LAUNCHED

MICROLINK has joined forces with the University College of Swansea to provide a unique electronic bulletin board for businesses.

Subscribers can get advice free of charge from experts in various fields, and discuss business problems with others who may have experienced similar difficulties.

As well as being instant and free, this access to professional expertise comes with no strings attached, no axe to grind and no commercial bias.

The wide range of business sectors covered includes legal matters, exporting,

industrial relations, management, market research, personnel and training, statistical and systems analysis.

Expertise is also supplied in the areas of computing and computer systems, electrical and electronic engineering, expert systems and artificial intelligence, and mechanical engineering.

Users of the Business Bulletin Board can browse through the messages and replies for items of interest, or leave a message themselves.

All messages are read by the system operators who pass them on to the relevant expert.

Archimedes

BEEBUG the recognised Archimedes specialists

RISC USER

We have launched a magazine and support group specifically for users of Archimedes. The magazine provides news, reviews, hints and programs, while the support group gives Technical Advice and 5% discount on our range of Archimedes products. UK subscription is £12.50 per annum.

Reserve your Archimedes 400 Series computer *NOW.*

Archimedes 440s are available Ex-stock and 410s will be available in the first quarter of '88.

ARCHIMEDES 300 SERIES (Always in stock)

0190G BBC 305 Entry System	803.85
0191G BBC 305 Mono System	861.35
0192G BBC 305 Colour System	1033.85
0193G BBC 310 Entry System	891.25
0194G BBC 310 Mono System	948.75
0195G BBC 310 Colour System	1121.25
0257G BBC 310M Entry System	960.25
0258G BBC 310M Mono System	1017.75
0259G BBC 310M Colour System	1190.25

MEMBERS SPECIAL OFFER

When buying a new Archimedes we will give you absolutely free:
"Zarch" the complete Lander game, Printer lead and Lockable 3.5" disc box with 10 discs all worth over £60.

ARCHIMEDES 400 SERIES

0260G Archimedes 410 Entry	1608.85
0261G Archimedes 410 Mono	1666.35
0262G Archimedes 410 Colour	1838.85
0263G Archimedes 440 Entry	2643.85
0264G Archimedes 440 Mono	2701.35
0265G Archimedes 440 Colour	2873.85

Beebug are a specialist Acorn appointed Archimedes Repair Centre. If you have any problems with your Archimedes we will be only too happy to put them right.

ARCHIMEDES UPGRADES

0266C 0.5Mb RAM (305 only)	102.35	97.23
0267F Floppy Disc Drive	143.75	136.56
0268G 20Mb Hard Disc (300's)	573.85	545.16
0269C Podule Backplane	44.85	42.61
0270D ROM Podule	67.85	64.46
0271D I/O Podule	90.85	86.31
0272D MIDI add-on to I/O	33.35	31.68

ARCHIMEDES SOFTWARE

1080B Ansi C	113.85	108.16
1081B ISO Pascal	113.85	108.16
1082B Fortran 77	113.85	108.16
1083B Twin	33.35	31.68
1084B Logistix	113.85	108.16
0900B PC Emulator	102.35	97.23
1095B Artisan	39.95	37.95
1096B Image Writer	29.95	28.45
1097B Archimedes Toolkit	39.95	37.95
1098B Alpha Base	49.95	47.45
0640B Wordwise Plus Disc	23.00	20.70
1050B Viewsheet (Emulation)	59.80	56.81
1051B Viewspell (Emulation)	39.85	37.86
1052B Viewstore (Emulation)	59.80	56.81
1053B Viewindex (Emulation)	14.95	14.20
1057B View (Emulation)	59.80	56.81

ARCHIMEDES BOOKS

1242B Archimedes Ref. Man.	29.95	28.45
1271B ARM Assembly Prog.	12.95	12.30

Trade-In your BBC or Master Series Computer for an Archimedes.

Sample Discounts available:

BBC B issue 7 with DFS	£225
Master 128	£250
Master Compact Entry	£215

Computers must obviously be in good working condition to qualify for this offer. Please telephone for further details

PRICES INCLUDE VAT

Where two prices are shown, the first is our full price and the second our members price.

ARCHIMEDES LEADS

0558B SKART Lead	10.47	9.95
0425B Archimedes Printer Lead	10.47	9.95
0795C 5.25" Archie Disc Lead	25.26	24.00
0796C Serial Link Kit & Disc	18.16	17.25

See next column for details

MINERVA

0920B Deltabase	29.95	28.45
0921B System Delta Plus	69.95	66.45
1233B Sys. Delta Plus Ref. Man.	29.95	28.45
0922B Order Processing	64.95	61.70
0923B Sales Ledger	64.95	61.70
0924B Stock Manager	64.95	61.70
0925B Purchase Ledger	64.95	61.70
0926B Nominal Ledger	64.95	61.70
0927B School Administrator	79.95	75.95
0928B Video Rental	69.85	66.36
0929B Reporter	24.95	23.70
0930B Minotaur Game	14.95	14.20

5.25" DISC DRIVE INTERFACE FOR THE ARCHIMEDES

(Available End of December)

Connect up to four external disc drives to your Archimedes with our fully buffered disc drive interface. It fits neatly at the back of your machine and requires NO SOLDERING.

Stock code 0795C Members price £24.00

SERIAL LINK KIT & DISC

(Available End of December)

This kit enables files to be transferred between BBC and Archimedes, in either direction, with the minimum of fuss. The software is menu driven and is fully compatible with DFS and ADFS. The three metre lead simply connects between the serial ports and the software is loaded via the Archimedes.

Stock code 0796C Members price £17.25

The CC ROM Podule from Computer Concepts, features seven 128K ROM sockets which can have Battery-Backed RAM fitted to them.

Available End-December.

0675B 10 x Beebug 3.5" DS Discs 15.79 15.00

OTHER HARDWARE

0805DCC ROM Podule (End-Dec) 56.35 53.53

Carriage

Carriage is denoted by the letter contained in the stock code. A-50p, B-£1, C-£2, D-£3, E-£3.75, F-£5.50, G-£7. When ordering several items, use the highest price code and half of each subsequent code. For courier delivery use code G.

Credit Cards



Access and Visa orders are welcome, and may be placed by letter or telephone (24 hours).

BEEBUG LTD,

Dolphin Place, Holywell Hill, St. Albans, Herts., AL1 1EX.

☎ (0727) 40303


Please telephone for a Free Information pack and Archimedes brochure.

Acorn
The choice of experience.


**PEARTREE
COMPUTERS**
LTD

**Approved
Acorn dealer**


Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

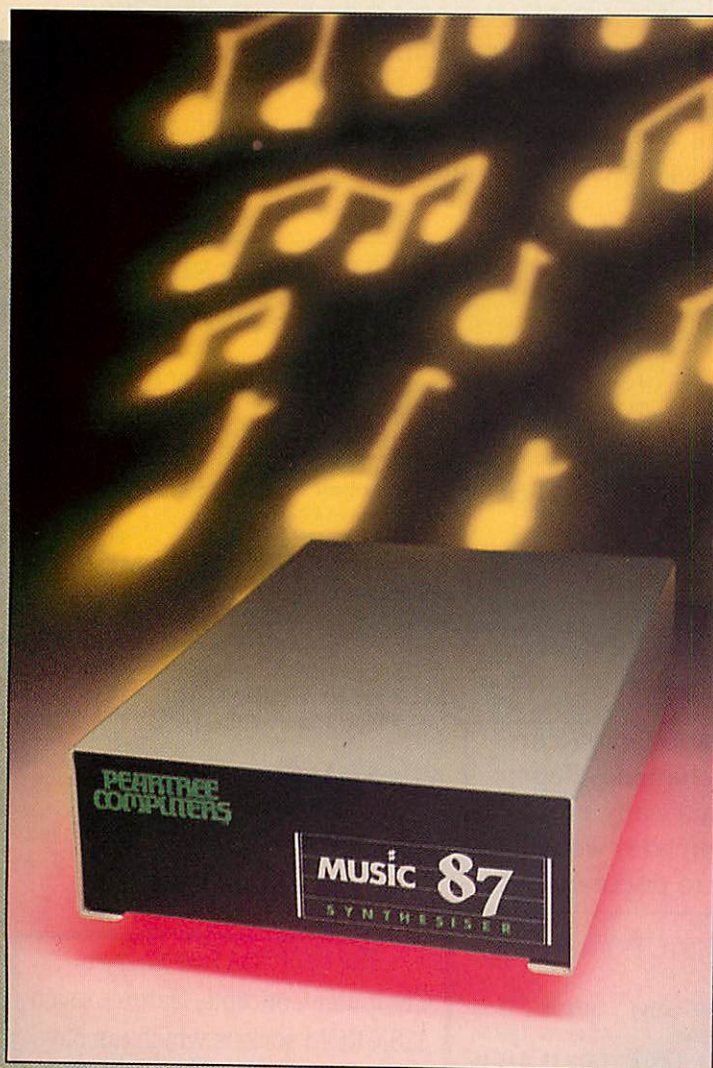


► PEP024




Studio Desk menu with mouse driven record, play, rewind options



Music Editor menu, light pen & mouse driven with complete menu options at top



Sound Shaper allowing you to create your own waveforms, envelopes, mouse, lightpen or keyboard driven



Instrument definer allows you to define your own instrument pitch, amplitude and wave forms

OVER

17000

visitors attended the 87 Acorn User Show. Most were amazed at the performance of the **MUSIC 87**. As a result we have been receiving hundreds of telephone calls from people wanting to know the differences and merits of the **MUSIC 87** synthesiser when compared to more expensive music synthesisers. Below is a table showing how the **MUSIC 87** compares to the Music 5000.*

9 good reasons to buy the **MUSIC 87** rather than the Music 5000.*

FUNCTION	Music 5000	MUSIC 87
Mouse driven	×	✓
2nd processor compatible	×	✓
Light pen driven	×	✓
Full 32k EPROM	×	✓
Waveform designer as standard	×	✓
Ability to bypass AMPLE	×	✓
Graphic representation of waveforms, envelopes and score	×	✓
Music printout as standard	×	✓
Expensive	✓	×

Price

Music 5000.*

£161.00

(Incl. VAT)

MUSIC 87

£79.95

(Excl. VAT)



MUSIC 87 software to upgrade your Music 500 or 5000 only **£39.95**

*Music 5000 is supplied by Hybrid Technology Limited



PEARTREE COMPUTERS LTD

**Approved
service centre
for all Acorn
products.**

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF. Telephone (0480) 50595

HARDWARE

ACH001	BBC MASTER 128 128K complete with View, Viewsheet, basic editor. ADFS 1770 DFS	£385.00
*** special offer includes FREE MUSIC 500		
ACH002	BBC MASTER COMPACT 128K computer 640K disc drive built in RGB comp video, joystick and printer port	£375.00
ACH003	BBC MASTER COMPACT TV As above with PAL TV modulator	£395.00
ACH004	BBC MASTER COMPACT MONO As above with high resolution green monitor	£445.00
ACH005	BBC MASTER COMPACT COLOUR As above with RGB medium res colour monitor with video composite	£545.00
ACH011	TURBO UPGRADE for MASTER 128 65C102 co-processor 4MHz - 64K ram extra high basic, high editor	£99.00
ACH012	512K MSDOS for MASTER IBM compatible DOS plus 8186 processor	£189.00
ACH041	UNIVERSAL 2nd PROCESSOR Allows both the turbo upgrade and the 512K upgrade to be run on the BBC Model B or B+	£75.00
ACH015	1770 DFS KIT for BBC B Allows BBC to access disc drives Allows you to use ADFS as well	£41.00
ACH016	ADFS ROM for 1770 or BBC B+ Gives 720K per disc	£24.00
ACH020	32016 CO-PROCESSOR 32 bit processor - Complete with Fortran, Pascal, Cambridge Lisp, C Basic and 32016 assembler	£999.00
ACH021	ACORN CAMBRIDGE WORK STATION 4MB work station with 32016 co-processor	£3400.00
ACP003	MEGAMOUSE High quality UK manufactured - Slip free rubber coated ball - Fully AMX compatible	£49.00
ACH034	ACORN MUSIC 500	£49.00

MODEMS

ACS075	COMMSTAR II Now compatible with Master 128	£29.95
ACP014	PAGE NIGHTINGALE 1200/75 75/1200 300/300 baud rates - 81 approved complete with cables - Includes Comstar II	£99.00
ACP015	PAGE NIGHTINGALE COMBO As above with Comstar software	£129.00
ACP020	WS3000V21/V23 MODEM Hayes compatible	£285.00
ACP021	WS4000 SCHOOLS MODEM Autodial, autoanswer - Schools approved	£159.00
ACP029	VOYAGER MODEM	£59.00
ACP031	BBC MICRO VIEWDATA	£49.00

COMPONENTS

ACP007	EPROM 27256 32K 32K eprom	£4.95
ACP008	EPROM 27128 16K 16K eprom	£3.95
ACP010	8K RAM CHIP Low power ram chips used in sideways rams	£3.50
ACP012	EPROM ERASER WITH TIMER	£29.95
ACP013	EPROM BLOWER Will program 2764, 27128, 27256 and 27513	£69.00
ACP023	ACORN BBC B KEYBOARD	£49.00
ACP027	ACORN 8271 AND TTL Complete DFS kit	£49.00
ACP028	BBC B+ AND BBC B IBM LOOKALIKE CASE	£99.00
ACP033	BBC MASTER DUST COVER	£4.50
ACP034	BBC B DUST COVER	£4.50

The Acorn Music 500 SYNTHESIZER

Now available from Peartree the Acorn
Music 500 for the BBC, BBC B+, Master 128

£49.00 excluding VAT.
only from PEARTREE ▶ ACH034

SOFTWARE

Computer Concepts

ACS002	WORDWISE PLUS Made 7 editing, preview in mode 0 - Multi document editing	£45.00
ACS003	INTER SHEET 40, 80 and 105 column mode multiple spreadsheet	£42.00
ACS004	INTER CHART Built in Epson screen dump - Supports pie, line & bar charts	£30.00
ACS005	INTER WORD 80 or 105 column word processor - Continuous documents	£42.00
ACS006	INTER BASE Compatible with all filing systems - Card index mode, contains powerful Basic like programming language	£50.00
ACS033	SPELLMASTER	£50.95



ACORN SOFTWARE

ACS012	VIEW 3.0 Industry's standard word processor - For the BBC B, B+, 6502 compatible - Including printer driver generator	£53.00
ACS013	VIEWSHEET Acornsoft standard spreadsheet	£36.00
ACS014	VIEWSTORE Complete with report generator Data can be imported from other view products	£37.00
ACS015	VIEWSPELL Spelling checker for View with 70,000 words	£32.00
ACS016	VIEWPLOT Enables you to draw lines, pie graphs Compatible with VIEWSHEET	£24.00
ACS017	VIEWINDEX Automatically creates indexes, notes, page numbers	£13.00
ACS018	VIEW PRINTER DRIVER GENERATOR Used to personalise View documents with special features	£9.00

SOFTWARE

ACS181	OVERVIEW Includes all View family software	£86.00
ACS181	OVERVIEW For the MASTER series only - Includes Viewplot, Viewstore, Viewspell, Viewindex and the View Printer Driver Generator	£86.00
ACS020	ISO PASCAL Full implementation of the ISO standard	£52.00
ACS053	ISO PASCAL S.A.G. DISC Generate stand alone code	£29.00
ACS021	LOGO Good intro. for children with total graphics support	£52.00
ACS022	TERMINATOR Terminal emulator enables the host computer to be sent directly to the BBC's output driver	£29.00
ACS023	COMAL Programming language standard in many European countries	£39.00
ACS024	BASIC EDITOR Powerful screen basic editor	£25.00
ACS025	MICRO PROLOG	£60.00
ACS026	BCPL ROM	£49.00
ACS027	BCPL CALCULATION	£29.00
ACS028	BCPL STAND ALONE GENERATOR	£39.00
ACS054	FORTH ROM	£39.00
ACS055	FORTH DISC	£14.95
ACS056	MASTER LISP C-ROM	£49.00
ACS058	MASTER LOGO C-ROM	£52.00
ACS059	6502 DEVELOPMENT PACK DISC	£39.00
ACS060	GXR for MODEL B	£23.00
ACS061	GXR for MODEL B+	£23.00
ACS031	DOS COPY BBC/MS-DOS BBC MSDOS copies to or from many IBM MSDOS disc formats - Requires 1770 based DFS	£14.95
ACS032	CPMBEEB BBC/CPM	£14.95
ACS038	AMX MOUSE AND SUPERART	£65.00
ACS039	AMX DESK	£19.00
ACS040	AMX UTILITIES	£11.50
ACS041	AMX SUPERART	£43.00
ACS042	AMX PAGEMAKER	£43.00
ACS043	AMX 3D ZICON	£21.00
ACS044	AMX DATABASE	£21.00
ACS045	AMX XAM	£21.00
ACS046	AMX MAX	£17.00
ACS047	THE ARTIST SOFTWARE	£39.00
ACS048	ARTIST AND MEGAMOUSE	£79.00
ACS050	ADVANCED DISC INVESTIGATOR Powerful disc utility - Back up most protected discs - Check and repair faulty tracks - Compatible with the BBC B, B+ and the Master	£22.50
ACS075	ADVANCED 1770 DFS Turn our RAM cartridges into RAM disc - 62 file catalogue - 640K disc capacity	£27.50
ACS051	ADVANCED DISC TOOLKIT Compatible with all Acorn products 35 extra commands ADFS formatter and back up plus many more powerful utilities	£27.50
ACS052	MUSIC 500 SOFTWARE Ample software with full manual	£9.95

PRINTERS

PRTO01	EPSON LX86 PRINTER 120CPS - NLQ mode - Centronics interface	£199.00
PRTO02	EPSON FX800 19 pin dot matrix - 180 CPS draft mode, 35 CPS NLQ mode - 8K buffer - Parallel interface standard - 80 column	£399.00
PRTO03	EPSON FX1000 19 pin dot matrix - 200 CPS draft mode, 35 CPS NLQ mode - 8K buffer - Parallel interface standard - 136 column	£499.00
PRTO04	EPSON LQ800 PRINTER 24 pin dot matrix - 180 CPS draft mode, 60 CPS NLQ mode - 7K buffer - Parallel interface standard - 80 column	£499.00
PRTO05	EPSON LQ1000 PRINTER 24 pin dot matrix - 180 CPS draft mode, 60 CPS NLQ mode - 7K buffer - Parallel interface standard - 136 column	£699.00
PRTO08	MP 165 PRINTER 165 CPS draft mode, 40 CPS NLQ mode - 7K buffer - Centronics interface - Built in tractor feed - Epson compatible	£199.00
PRTO11	JUKI 6100 PRINTER 18 CPS daisy wheel printer - Standard ribbons - Centronics interface	£299.00
PRTO21	PANASONIC KX-P1081 DOT MATRIX PRINTER Fast draft printing at 120 CPS Excellent Near Letter Quality font at 24 CPS	£147.00
PRTO14	EPSON LX TRACTOR FEED	£22.00
PRTO16	EPSON LX CUT SHEET FEEDER	£59.00
PRTO23	EPSON LQ1000 TRACTOR FEED	£95.00
PRTO24	EPSON LQ1000 CUT SHEET FEEDER	£130.00
PRTO25	EPSON FX80+ CUT SHEET FEEDER	£129.95

**Please Note
We have many other makes of printers in stock such as



Always call for availability.

LEADS

LDS001	BBC TO TV LEAD	£1.25
LDS002	BBC TO GREEN MONITOR LEAD	£2.95
LDS003	BBC TO SONY/KAGA COLOUR MONITOR	£5.95
LDS004	BBC TO MICROVITEC LEAD	£2.20
LDS005	PHONO TO PHONO LEAD	£1.25
LDS006	BNC TO BNC	£2.25
LDS007	BBC TO CASSETTE	£2.95
LDS008	BBC TO ACORN CASSETTE LEAD	£2.25
LDS009	BBC TO CENTRONICS	£9.95
LDS010	BBC TO SERIAL PRINTER	£9.00
LDS011	4 WAY MAINS TRAILING SOCKET	£9.50
LDS012	CABLE FOR MODEM	£4.95
LDS014	MASTER COMPACT PRINTER LEAD	£15.95

BOOKS

MIS012	BBC MASTER REFERENCE GUIDE PT1	£14.95
MIS013	BBC MASTER REFERENCE GUIDE PT2	£14.95
MIS014	VIEW MANUAL (BBC)	£10.00
MIS015	VIEWSHEET MANUAL	£10.00
MIS019	VIEWSTORE MANUAL	£10.00
MIS016	DFS OPERATING SYSTEM MANUAL	£6.95
MIS017	BBC USER GUIDE	£14.95
MIS024	BBC ADVANCED USER GUIDE	£16.95
MIS018	ADVANCED SIDWAYS RAM USER GUIDE	£9.95

PRINTER RIBBONS

MIS005	RIBBON FOR MX FX80 & JUKI 5510	£4.50
MIS006	RIBBON FOR LX80 LX86	£4.50
MIS007	RIBBON FOR MP165	£5.00
MIS008	RIBBON KAGA KP810/ CANON PW1	£5.95
MIS009	RIBBON FOR EPSON FX RX100	£7.95
MIS034	RIBBON FOR EPSON LQ800	£11.95
MIS023	RIBBON FOR CPAB0	£3.50

All prices are exclusive of VAT.

ECONET



ACH006	ECONET BBC MASTER ET 128 No DFS Econet station with 128K memory	£300.00
ACH007	ECONET KIT Upgrades for BBC B or BBC B+	£55.00
ACH008	ECONET STARTER KIT	£79.00
ACH009	ECONET SOCKET KIT	£29.00
ACH010	ECONET MODULE Upgrade cartridge for Master 128	£43.00
ACH022	ECONET 10 STATION LEAD SET	£25.00
ACP006	PRINTER SERVER EPROM Allows BBC machine to be a printer server station	£39.00
ACH031	WINCHESTER 30MB (ACORN) with LEVEL 3 FILE SERVER	£1449.00
ACH039	FILESTORE E01 Stand alone twin floppy file server unit Contains clock box, terminator, etc.	£819.00
ACH040	FILESTORE E20 20MB hard disk for use with Filestore E01	£709.00

DISC DRIVES



All Peartree Disc Drives
have a two year warranty by
Akhter Computers

ACH026	SINGLE 40/80 DRIVE, NO PSU 400K MITSUBISHI	£119.00
ACH027	SINGLE 40/80 DRIVE inc. PSU 400K MITSUBISHI	£135.00
ACH028	DUAL 40/80 DRIVE, NO PSU 800K MITSUBISHI	£229.00
ACH029	DUAL 40/80 DRIVE, inc. PSU 800K MITSUBISHI	£269.00
ACH030	DUAL 40/80 DRIVE IN MASTER BRIDGE MITSUBISHI	£289.00
ACH032	WINCHESTER 20MB & 400K DRIVE In monitor bridge for Master - Built in fan and power supply - Other sizes for hard discs are available, please call	£766.00

**PLEASE USE OUR CODES
WHEN ORDERING**

Acorn
The choice of experience.


**PEARTREE
COMPUTERS**
LTD

M
BRITISH
BROADCASTING
CORPORATION
MASTER SERIES
MICROCOMPUTER

Peartree House, No 1 Blackstone Road, Stukeley Meadows Industrial Estate, Huntingdon, Cambs PE18 6EF

PEARTREE PRODUCTS

PEP001	PEAR 1 ROM CARTRIDGE Add 32K rom to your Master	£8.95
PEP002	MR6000 MASTER CARTRIDGE Add 64K rom to your Master	£11.95
PEP003	MR7200 MASTER RAM CARTRIDGE Add 32K ram to your Master	£29.95
PEP019	MR8000 MASTER RAM CARTRIDGE Add 64K ram to your Master Battery backed up Battery life five years	£39.95
PEP023	MR4800 RAM BOARD RAM board for the BBC Model B 128K RAM Battery backed up Small, easy to fit, complete with utility software Includes write protect switch, battery included	£59.95
PEP004	MR3000 ROM BOARD Still going strong. This has proved to be a very popular mini rom board for the BBC Model B Add 4 extra rom sockets	£15.95
PEP005	MR4200 RAM BOARD Add 32K of sideways ram and 3 extra rom sockets. Includes write protect switch	£29.95

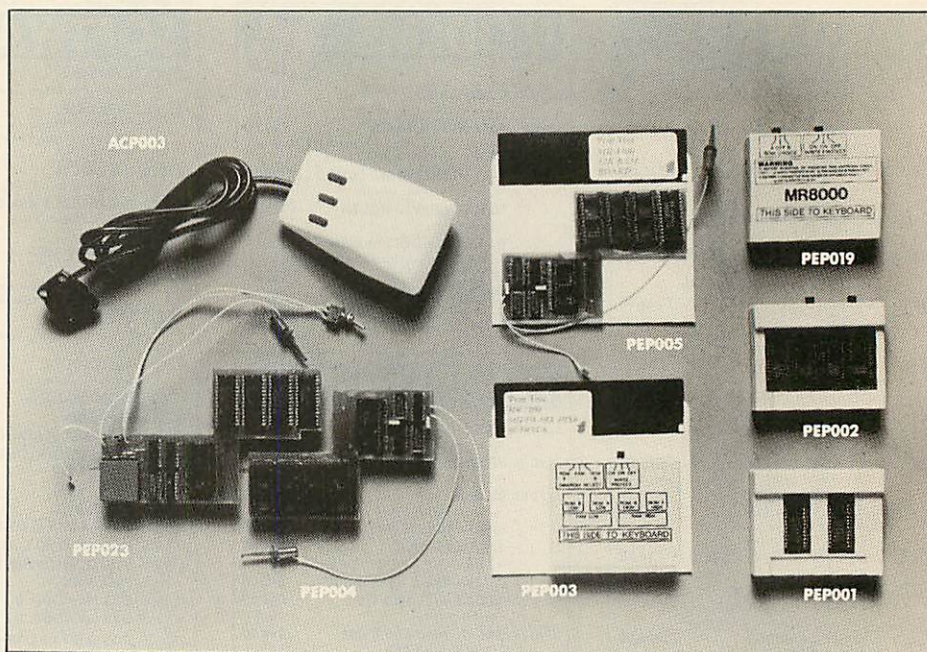

PEP010 **DISCS DS/DD 5.25 96 TPI** **£13.50**
Life time guarantee
Reinforced hub

PEP011 **DISCS DS/DD 3.5** **£26.00**
Double sided
Suitable for the Master Compact

Archimedes



The ARCHIMEDES High Performance Computer Systems represent a considerable lead in performance, but how has this performance been put to use in the range of products?

The ARCHIMEDES range includes the 300 Series and the more sophisticated 400 Series.

All machines have features in common:

- 32 bit RISC technology;
- ergonomically styled in a 3 box presentation;
- 'IBM enhanced' style keyboard with 3 button mouse;
- British Broadcasting Corporation Micro style operating system (ARTHUR);
- BB BASIC V;
- interfaces; printer, serial, monitor, stereo sound;
- ECONET plug-in option;
- a variety of podules can be fitted.

THE 300 SERIES

The 300 Series, identified by its red function keys,

Now available: 0% Finance* on all Archimedes models from Peartree—call for details.

consists of two models, ARCHIMEDES 305 with 0.5 Mbyte of RAM and ARCHIMEDES 310 with 1 Mbyte of RAM. These machines are the latest generation of British Broadcasting Corporation Micros. They offer, at low cost, all the basic features with expansion capabilities. Both machines have a 512 Kbyte ROM and a 1 Mbyte (unformatted) 3 1/2" disc drive.

THE 400 SERIES

The more powerful 400 Series offers considerably increased expansion capabilities. These machines are the new range of Acorn Computers.

The ARCHIMEDES 410 has 1 Mbyte of RAM; 1 Mbyte (unformatted) 3 1/2" disc drive; a hardware floating point unit option; a co-processor bus; a hard disc controller; a four socket back plane; 512 Kbytes of ROM.

At the top of the range is ARCHIMEDES 440. This machine possesses all the features of the 410 as standard, with the adoption of 4 Mbytes of RAM and a 20 Mbyte hard disc.

ARCHIMEDES is an open system and its flexibility is achieved by fitting any of the following podules (peripheral modules) via a back plane:

- hard disc controller (300 Series only);
- ROM extension board;
- MIDI music interface;
- MS-DOS co-processor;
- SCSI;
- hardware floating point unit;
- Ethernet podule.

Third party suppliers will be meeting other user requirements.

300 SERIES

	OLD PRICE	NEW PRICE
A305 SYSTEM BASIC	£799	£699
MONO	£849	£749
COLOUR	£999	£899
A310 SYSTEM BASIC	£875	£775
MONO	£925	£825
COLOUR	£1075	£975

400 SERIES

A410 SYSTEM BASIC	£1399
MONO	£1449
COLOUR	£1599
A440 SYSTEM BASIC	£2299
MONO	£2349
COLOUR	£2499

We accept Barclaycard/Visa/Access/Mastercard/postal orders or cheques. We accept government and educational orders. Leasing available, please apply for written details.

You may purchase any of the items listed, by cheque made payable to
PEARTREE COMPUTERS LTD.

All you have to do is list your requirements on a sheet of paper, post it to us quoting ref, and we will despatch your goods within 24 hours, whenever possible.

Please add the following amounts for postage and packing:

Items below £10.00	add £1.50
Items below £50.00	add £2.50
Items below £100.00	add £3.50
Items over £100.00	add £10.00

Independent courier for items over £100.00
All prices exclude VAT.

Access/Barclaycard holders—call us on our new special line: **(0480) 50595**

Prices are correct at time of going to press.
Peartree Computers reserves the right to change prices without prior notice.

*subject to status.

LAST MONTH TO CLAIM YOUR FREE
MYSTERY GIFT WITH EVERY
ORDER!!

AMAZING OFFERS

£££ SAVING ELECTRON PACKS

SCOOP PURCHASE
ELECTRON
COMPUTERS IN
STOCK NOW
3 months warranty
£59.95
Includes power supply,
aerial lead, user guide.
90 day Warranty

FOR THE ELECTRON
VIEW ROM £29.95
Word Processor £14.95
VIEW SHEET ROM £29.95
(Spreadsheet) £14.95
BUY BOTH £22.00
ACORN PLUS 1 £59.95
Now in stock! £43.95

PACKAGE 1
PLUS 1 £49.95
VIEW £14.95
VIEWSHEET £14.95
£79.85
OFFER PRICE £65.95
PACKAGE 2
ELECTRON COMPUTER £59.95
PLUS 1 £49.95
VIEW ROM £14.95
£124.85
OFFER PRICE £99.95

IDEAL GIFT FOR XMAS
BRAND NEW
SPECTRUM PLUS's 48k
only £69.95
* Comes with power supply,
User Guide, introductory cass.,
T.V. aerial and
90 day warranty

ELECTRON AND BBC

ELECTRON JOYSTICK

Electron Joystick Interface and Software
£14.95
Quickshot II Turbo Joystick £13.95
Buy both for ONLY £25.00

NEW ACORNSOFT OVERVIEW

A sophisticated combination of Viewspell &
Viewstore on Rom Cartridge and
Viewplot, View index and Printer Driver
Generator on Disc
BBC Disc & Rom R.R.P. £98.90
OFFER PRICE £78.45

ACORNSOFT VIEW PROFESSIONAL

Combines the functions of a wordprocessor
spreadsheet and database in one program.
BBC B, & all Master Series Micros
R.R.P. £99.95
OFFER PRICE ONLY £79.45

PRIMARY EDUCATION

ASK SOFTWARE 7-11 years
The best four language programs (set)
The best four maths programs (set)
BBC Disc £17.94 per set
BBC Compact £18.35 per set
BBC/Electron Cassette £17.95 per set

SPECIAL OFFER — ACORNSOFT

BBC Cassette and Disc
EDUCATION COMPENDIUM
Workshop (3+ years)
ABC (7+ years)
SPOOKY MANOR (7+ years)
TALKBACK (10+ years) SET **£11.96**

ELECTRON POWER SUPPLIES £9.95
LOGO (Electron) £59.95 £29.95

ARCHIMEDES !

Zarch	£10.95	£17.96
Minotaur	£14.95	£13.46
Ansi C	£113.85	£102.47
Fortran 77	£113.85	£102.47
ISO Pascal	£113.85	£102.47
Comal	£49.85	£44.95
Deltabase	£29.85	£26.96
Twin	£33.85	£30.00
Artisan	£39.85	£35.96
Toolkit Module	£39.85	£35.96

*BBC COMPATIBLE



SAE for comprehensive price lists
Please state for which machine

HOME INTEREST

Snapper £6.99 *Desk Diary £6.99
Boxer £6.99 *Business Games £6.99
*Watch your Weight £6.99 *Graphs and
Theatre Quiz £6.99 Charts £6.99
Complete Cocktail Maker £6.95
SELECT ANY FIVE FOR ONLY £7.95
(or £1.65 each)

VOLTMAZE TWIN JOYSTICKS

for use with Plus 1 or BBC
Normally £19.95
Now Only £14.95

EDUCATION SPECIALS

Linkword Spanish	£14.95	Maths 'O' Level I	£12.65
Linkword Italian	£14.95	Maths 'O' Level II	£12.65
Talkback		Biology	£12.06
Workshop		English	£12.06

ANY TWO FOR £3.95

RECENT RELEASES AT SPECIAL PRICES

Superior Collection 1 or 2	BBC only
Superior Collection 3	Electron only
Codename Droid	Crazee Rider
Strykers Run	Palace of Magic
Paper Boy	Play it again Sam
Life of Repton	
Spellbinder	
Elixir	
Bonecruncher	
BBC/Electron Cass	£9.95 £7.59
BBC Disc	£11.95 £9.59
BBC Compact/Electron 3.5"	£14.95 £11.99
Cholo - Disc only	£14.35
IMOGEN BBC Cass	£7.59
BBC 40 or 80t	£8.59
Master Compact	£10.95
REMEMBER -	
New titles are being released every week!	
Phone for bargain prices!!	

MICROPOWER AND OTHER GAMES

ELECTRON

Classic Adventures	£6.95	Croaker	£7.95
Gyroscope	£6.95	Bumble Bee	£7.95
Bandits at 3 O'Clock	£6.95	Positron	£7.95
Escape from		Felix & the	
Moon Base Alpha	£7.95	Fruit Monsters	£7.95
Ghouls	£7.95	Cyberton Mission	£7.95
Stock Car	£7.95	Moonraider	£7.95
Killer Gorilla	£7.95	Felix & the Evil Weevils	£6.95
Rubble Trouble	£7.95	Frenzy	£6.95
Swoop	£7.95		

BBC

Gyroscope	£7.95	Stock Car	£7.95
Classic Adventures	£7.95	Cyberton Mission	£7.95
European Knowledge	£7.95	Positron	£7.95
World Geography	£7.95	Fat Man Sam	£9.95
Junior Maths	£7.95	Star Drifter	£9.95
Killer Gorilla	£7.95	Microcosm	£9.95
Bandits at 3 O'clock	£7.95		

ANY FIVE FOR ONLY £7.95!

MICROPOWER MAGIC COMPILATIONS I & II

10 ORIGINAL HITS ON EACH
FANTASTIC VALUE

BBC B/B + /MASTER CASSETTE	£7.95	£5.95
BBC B/B + /MASTER 80T DISC	£7.95	£5.95
BBC B/B + /MASTER 40T DISC	£7.95	£5.95
BBC COMPACT DISC	£9.95	£7.75
ELECTRON CASSETTE	£7.95	£5.75

MASTER COMPACT

★ VIEW 3	£59.80	£45.00
★ VIEWSHEET	£59.80	£45.00
★ VIEWSPELL	£39.95	£31.96
★ VIEWSTORE	£59.80	£45.00
★ VIEW INDEX	£14.95	£11.99
★ ALL ARCHIMEDES COMPATIBLE		

BRAND NEW FERGUSON

12" Green Screen Monitors (MM06)
ONLY £59.95!
(Carriage free if bought with Electron or Plus One -
otherwise please add £2.00)

Name _____
Address _____

Tel. _____ MU3
I claim my mystery gift

SOFTWARE BARGAINS

(a division of the Micropower Group)
Dept. MU3, 8/8A Regent St., Chapel Allerton, Leeds LS7 4PE
Tel: (0532) 687735
Out of Hours Answer Phone

PLEASE ADD 95p P&P
and make cheques
payable to Software Bargains
Goods despatched within 48 Hours
Subject to availability



Take command...

**Make your BBC Basic
even more powerful
than it already is
with Robin Nixon's
ingenious utility**

BECAUSE BBC Basic is so fast and well structured it is probably one of the best you'll find. But, good as it is, do you ever find that you would like to use certain commands available on other micros which the BBC Micro lacks – such as WHILE...WEND?

Perhaps you wish you could add your own specialist commands – such as a facility to swap the contents of two variables.

Over the next three months we'll be looking at how to do just that. Although we'll be using machine code, don't worry if you're not too sure about it, as the example programs given are complete and require no knowledge of assembler to use them.

Having said that, I hope that these articles will help to give a clearer idea of machine code to those interested in learning it.

Let's kick off by finding out how to add the simple one character command B for BEEP. Not the most useful, perhaps, but it shows how things work. So, type in and run the following.

```
10 REM Example program
20 PRINT "Hello"
30 B
```

The computer was expecting a Basic keyword at the start of line 30 and as it didn't recognise the B it reported *Mistake at line 30*.

To create this error message the interpreter sent a number along with a string to the error handler, the address of which is stored in locations &202 and &203, the break vector.

So here's our first clue as to how we can add our own keywords. We must redirect the break vector to point to our

own routine which will trap any errors that occur. If an error is not *Mistake* we return control back to Basic's error handler, and if it is *Mistake* we can go on and do some further checking.

Look at lines 200 to 440 in Program I to see how we do it. The machine code is assembled differently depending on which version of Basic your micro has and these lines test whether the correct version is present and if not the message at line 350 is printed.

If you are using Hi-Basic this check is not made for reasons I'll explain later.

Having ascertained that the correct version is present, lines 480 to 530 actually interrupt the break vector if that hasn't already been done. Lines 480 and 490 load the contents of the break vector – stored in &202 and &203 – into the A and X registers of the 6502.

Lines 500 to 530 check whether the vector has already been changed, and if so jump to *alreadychanged* which, having an RTS, returns to Basic.

However, if the vector hasn't already been changed, lines 570 and 580 store its contents in &70 and &71, and lines 590 to 620 reset the vector to point to *main* where we can check whether or not the error was *Mistake*.

As we are interrupting the Basic interpreter's execution, lines 700 to 740 save the contents of registers A, X and Y by pushing them on to the 6502's stack.

Now we are ready to test for *Mistake*, error number four. When Basic generates an error it leaves locations &FD and &FE pointing to a byte which contains the error number.

At lines 750 to 780 a check is made to see if this byte contains a four: If it does, the error must be *Mistake*, so a branch is made to *beep*.

Otherwise, lines 820 to 860 pull the

stored contents of A, X and Y back off the stack and line 870 forces execution to jump to the location pointed at by &70 and &71, which you will remember is the actual location of the normal error handling routine we copied earlier from &202 and &203.

So far, so good. We have established that the error was number four, *Mistake*, and now need to discover whether it was generated by our new keyword, B.

The Basic interpreter uses a pointer called Pointer A, or *PTRA* for short, to tell it where in a program it is. This is located at &A, &B and &C.

Why three bytes? Well, &B and &C point to the start of the current Basic statement being executed and &A acts as an offset to the exact position within that statement.

When an error is encountered *PTRA* points to one character after the start of the error in the program. So lines 910 to 970 take the contents of *PTRA* and place it in locations &80 and &81. We are only using two bytes because we add the offset at &A to &B and &C and store the result.

Then lines 980 to 1040 subtract 1 from &80 and &81, and lines 1050 to 1070 test to see if the character pointed to is a B. If not, line 1170 jumps to *notbeep* which exits to Basic's error handling routine.

At last, at line 1090, we have found the new keyword B, so lines 1090 and 1100 execute the equivalent of VDU 7, a beep.

All that's left for us to do is to return execution to the Basic interpreter. This is done by lines 1140 to 1240.

Line 1140 calls a routine in the Basic rom which moves *PTRA* on to the next statement in the same line – if there is one, otherwise *PTRA* moves to the start of the next program line.

The three PLAs in lines 1150 to 1170 pull the contents of the A, X and Y registers off the stack because, as we are not going to the error handling routine, they are no longer needed.

The six PLAs following in lines 1180 to 1230 pull off unwanted error handling information that would have been passed to the error handler.

Finally, line 1240 jumps to a routine in the Basic rom which continues pro-

gram execution from where it left off.

As it stands the program caters for five different Basics: I, II, Hi-Basic, Master and Compact.

To determine the Basic in your micro the program looks at location &8015 in the rom which contains an identification number. This means that if you are using Hi-Basic the program will not work correctly so you need to change the following lines — after you've corrected any typing mistakes using the checksums:

```
200 JMP vectors
1310 GOTO 1470
```

Also, if you assemble the program on the Compact and try to run it on another micro you will be told the utility is for Basic 6 only. Although this sounds strange it is simply because the identification number held in the rom is 6. I assume that's because Acorn was reserving 5 for the Archimedes Basic.


Talking about the Archimedes: If you are running the 6502 simulation mode and have a copy of Hi-Basic you will be able to use this program if you make the changes to lines 200 and 1310.

Now that you've got the framework for adding extra commands, try experimenting with your own one-letter keywords.

The Basic I, Basic II and Hi-Basic rom routine addresses were found in the excellent book Within the BBC Microcomputer by Roger Cullis, published by Losco, and I would like to thank him for providing me with addresses of the rom routines for Master and Compact Basic.

If you wish to delve further into the depths of your micro I can thoroughly recommend this book as a valuable source of information.

● Next month we'll be looking at how to add more than one extra command and also how to make them as long as we want, rather than just single characters.

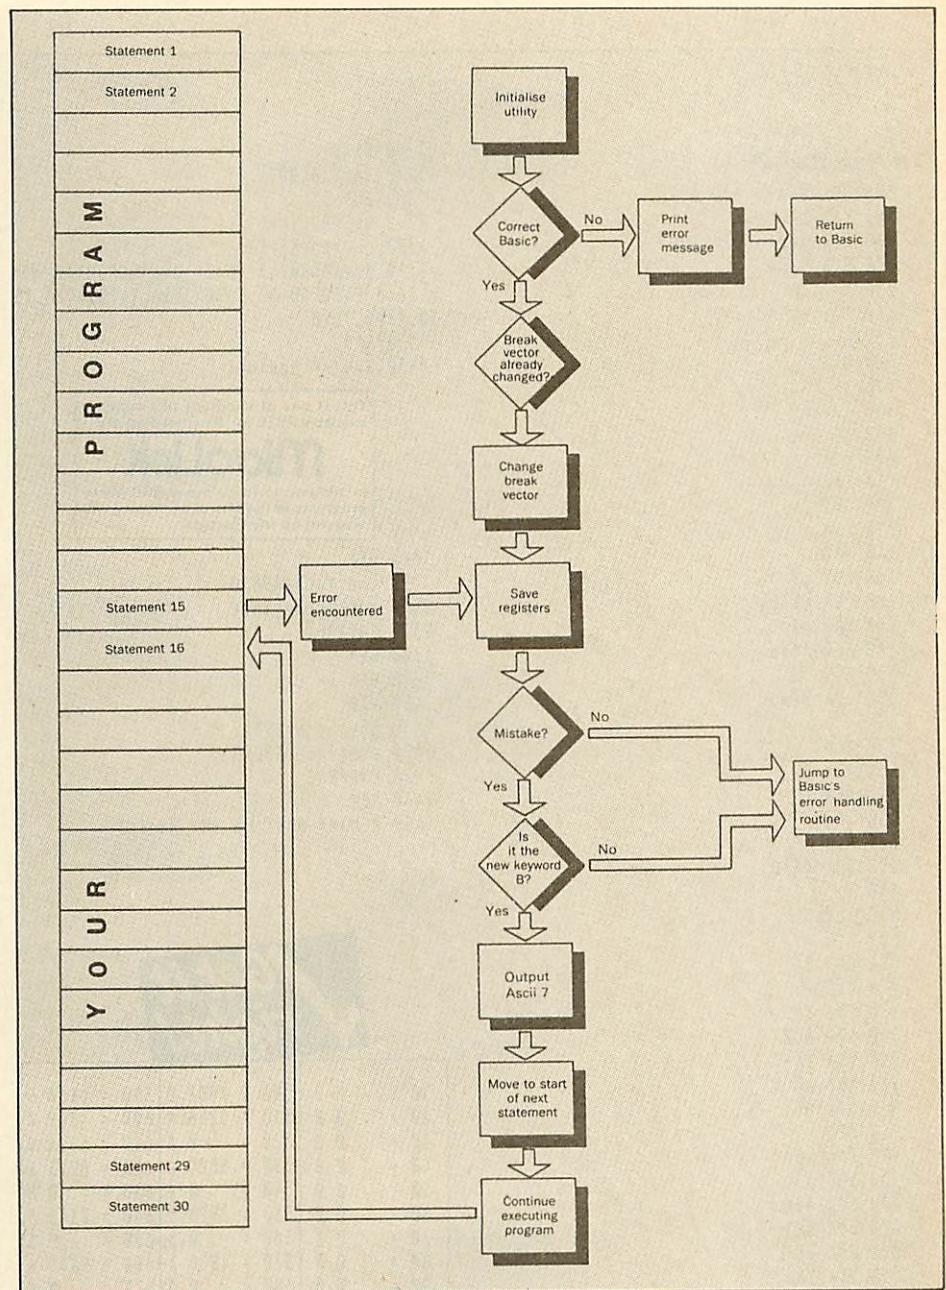

Flowchart of beep

Program I

```

10 REM *****
20 REM *
30 REM *      BEEP      *
40 REM *
50 REM *  By Robin Nixon  *
60 REM *
70 REM * (c) The Micro User *
80 REM *
90 REM *****
100 REM
110 MODE 7
120 PROCinit
130 FOR PASS=0 TO 3 STEP 3
140 P%=&C00
150 [
160 OPT PASS
170 \
180 .start
190 \
200 LDA basic
210 CMP &8015
220 BEQ vectors
230 LDX #0
240 \
250 .errloop
260 \
270 LDA errmess,X
280 BEQ enderr
290 JSR oswrch
300 INX
310 JMP errloop
320 \
330 .errmess
340 \
350 OPT FNequs(CHRS13+CHRS10+"This uti
    lity is for Basic"+CHRS32)
360 \
370 .basic
380 \
390 OPT FNequb(B%+48)
400 OPT FNequs(CHRS32+"only!" +CHRS10+C
    HRS13+CHRS0)
410 \
420 .enderr
430 \
440 RTS
450 \
460 .vectors
470 \
480 LDA &202
490 LDX &203
500 CMP #main MOD &100
510 BNE changebrkvector
520 CPX #main DIV &100
530 BEQ alreadychanged
540 \
550 .changebrkvector
560 \
570 STA &70
580 STX &71

```

Turn to Page 26 ►

◀ From Page 26

```

590 LDA #main MOD &100
600 STA &202
610 LDA #main DIV &100
620 STA &203
630 \
640 .alreadychanged
650 \
660 RTS
670 \
680 .main
690 \
700 PHA
710 TYA
720 PHA
730 TXA
740 PHA
750 LDY #0
760 LDA (&FD),Y
770 CMP #4
780 BEQ beep
790 \
800 .notbeep
810 \
820 PLA
830 TAX
840 PLA
850 TAY
860 PLA
870 JMP (&70)
880 \
890 .beep
900 \
910 LDA &A
920 CLC
930 ADC &B
940 STA &80
950 LDA &C
960 ADC #0
970 STA &81
980 SEC
990 LDA &80
1000 SBC #1
1010 STA &80
1020 LDA &81
1030 SBC #0
1040 STA &81
1050 LDY #0
1060 LDA (&80),Y
1070 CMP #ASC'B'
1080 BNE notbeep
1090 LDA #7
1100 JSR oswrch
1110 \
1120 .cont
1130 \
1140 JSR checkend
1150 PLA
1160 PLA
1170 PLA
1180 PLA
1190 PLA
1200 PLA
1210 PLA
1220 PLA
1230 PLA
1240 JMP continue
1250 J

```

```

1260 NEXT
1270 CALL &C00
1280 END
1290 DEFPROCinit
1300 oswrch=&FFEE
1310 B%=(?&8015)-48:IF B%<1 OR B%>6 GOT
0 1650 ELSE ON B% GOTO 1350,1410,1470,15
30,1650,1590
1320 REM
1330 REM ** Basic 1

```

This is one of hundreds of programs available FREE for downloading on

MicroLink

In addition to these many BBC Micro programs in the MicroLink library will also run on the Electron.

```

1340 REM
1350 checkend=&9810
1360 continue=&8B0C
1370 ENDPROC
1380 REM
1390 REM ** Basic 2
1400 REM
1410 checkend=&9857
1420 continue=&8B9B
1430 ENDPROC
1440 REM
1450 REM ** Basic 3 (Hi Basic)

```

```

1460 REM
1470 checkend=&D07C
1480 continue=&C398
1490 ENDPROC
1500 REM
1510 REM ** Basic 4 (Master)
1520 REM
1530 checkend=&9BA6
1540 continue=&9005
1550 ENDPROC
1560 REM
1570 REM ** Basic "6" (Compact)
1580 REM
1590 checkend=&9BA6
1600 continue=&8998
1610 ENDPROC
1620 REM
1630 REM ** Not a known Basic
1640 REM
1650 CLS:PRINT"This Micro is not runnin
g a compatible Basic":END
1660 DEF FNequb(byte)
1670 ?P%=byte
1680 P%=P%+1
1690 =PASS
1700 DEF FNequs(string$)
1710 $P%=string$
1720 P%=P%+LENstring$
1730 =PASS

```

✓ Get it right!

This listing is included in this month's tape & disc offer. See order form on Page 159.

10 = 0 0	300 = 7602 0	590 = DF66 9	880 = 0 B	1170 = 4E8A 3	1460 = 0 0
20 = 0 0	310 = 520B A	600 = A7D2 4	890 = 8975 9	1180 = 4E8A 1	1470 = 13B9 E
30 = 0 0	320 = 0 A	610 = 5426 D	900 = 0 9	1190 = 4E8A 0	1480 = D6C3 A
40 = 0 0	330 = BB2C A	620 = B7F3 B	910 = 93D6 2	1200 = 4E8A 1	1490 = ED0F 7
50 = 0 0	340 = 0 A	630 = 0 B	920 = 74FB 4	1210 = 4E8A C	1500 = 0 7
60 = 0 0	350 = 29F8 5	640 = 23C3 5	930 = 9E 0	1220 = 4E8A 6	1510 = 0 7
70 = 0 0	360 = 0 5	650 = 0 5	940 = 465E A	1230 = 4E8A 4	1520 = 0 7
80 = 0 0	370 = AB8D D	660 = 9843 A	950 = B394 2	1240 = 3842 C	1530 = 52EF 0
90 = 0 0	380 = 0 D	670 = 0 A	960 = A1BE D	1250 = 8B58 7	1540 = CE78 0
100 = 0 0	390 = 5226 A	680 = 37C9 3	970 = 567F 0	1260 = 2C83 D	1550 = ED0F 0
110 = 1092 2	400 = 9A59 F	690 = 0 3	980 = 8D00 0	1270 = 460D 0	1560 = 0 0
120 = DEBB 6	410 = 0 F	700 = 824E 8	990 = E148 0	1280 = FD2E 0	1570 = 0 0
130 = 7A36 4	420 = 4545 9	710 = 6ECC D	1000 = EDDE E	1290 = 344C 5	1580 = 0 0
140 = D6E6 B	430 = 0 9	720 = 824E 5	1010 = 4E5E 9	1300 = 78 4	1590 = 52EF 2
150 = EB9E 1	440 = 9843 1	730 = 5DFD 4	1020 = F169 E	1310 = 5438 0	1600 = 4D68 E
160 = D5D8 8	450 = 0 1	740 = 824E C	1030 = FDFE 8	1320 = 0 0	1610 = ED0F D
170 = 0 8	460 = 343B 6	750 = 9CF1 F	1040 = 567F 1	1330 = 0 0	1620 = 0 D
180 = 3208 0	470 = 0 6	760 = A93 9	1050 = 9CF1 B	1340 = 0 0	1630 = 0 D
190 = 0 0	480 = 74DF 8	770 = 427D C	1060 = 5039 C	1350 = 25B9 B	1640 = 0 D
200 = 5DE7 4	490 = 3698 3	780 = AED4 3	1070 = FB4A B	1360 = 10F5 9	1650 = CC8A 8
210 = FA5A 6	500 = 9253 E	790 = 0 3	1080 = 3D95 2	1370 = ED0F 7	1660 = DDFA B
220 = 1922 E	510 = 54D2 E	800 = 2419 7	1090 = 7272 C	1380 = 0 7	1670 = 24A9 C
230 = EA45 4	520 = AEF9 C	810 = 0 7	1100 = 9224 3	1390 = 0 7	1680 = 5569 A
240 = 0 4	530 = F559 F	820 = 4E8A 6	1110 = 0 3	1400 = 0 7	1690 = 4348 6
250 = 7C24 F	540 = 0 F	830 = 670E 5	1120 = A47E D	1410 = 999A D	1700 = 8EFA B
260 = 0 F	550 = C9FD 1	840 = 4E8A 1	1130 = 0 D	1420 = BA4C 9	1710 = 4776 2
270 = 9EB4 A	560 = 0 1	850 = 772F F	1140 = 8BD6 A	1430 = ED0F 0	1720 = C06A E
280 = 7FFF A	570 = 5660 E	860 = 4E8A E	1150 = 4E8A 3	1440 = 0 0	1730 = 4348 A
290 = 9224 B	580 = EA67 3	870 = 25CF B	1160 = 4E8A 0	1450 = 0 0	

IF I had a pound for every time I'd been asked a question about printers — which one to buy, how to work out control codes, how to send the codes — I'd have earned quite a few bob.

The fact is that printers are important to anyone who is using a BBC Micro, increasingly so as the micro evolves from a programmer's delight into a serious tool running a wide range of practical applications for the home, school and business. Whether your requirements involve word processing, spreadsheets or databases — all need some form of printed output at the end of the day.

Technology does not stand still and there's no such thing as perfection. New products, or at least enhancements, will continue to hit the streets, and this was never more true than for the humble printer. Over the past 18 months we have been hit with about 50 different models, all offering slightly more than their predecessors.

However, the one thing that all of these have had in common is the base technology — they have virtually all been dot-matrix printers. In many cases the number of dots used to form the character to be printed has been increased from 9-pin to 24-pin, but with a corresponding increase in damage to the wallet.

But now you can forget about dot-matrix printers because the printer of the future is with us, using technology that you would expect to read about in an Isaac Asimov classic — the laser.

Silent quality

For the uninitiated, a laser printer looks very much like a small photocopier and the technology is similar — using a complex imaging system driven by a small on-board computer. And the end result is high-quality printed output with virtually no noise.

The first laser printers appeared over a decade ago with Canon doing the early research and development. Today the company's laser printing mechanisms — referred to as engines — are regarded by many as the industry standard, though Ricoh and more recently Kyocera have released their own cheaper versions.

From the operator's point of view there are a number of fundamental changes: For example there is no sprocket system to take your computer listing paper: Laser printers accept only single sheets, which are inserted into a paper tray slotted into the side of the printer, just like a photocopier.

And there is no printer ribbon: Powdered ink — called toner — held in a cartridge is used in its place.

Neither is paper fed in one end and directly out of the other with text and graphics being printed on to it as it

Laser print technology

Bruce Smith looks into

a new breed of printer

passes through: Laser printers print a page at a time, the paper remaining inside the case until the page has been printed on to it. For this reason laser printers are often referred to as page printers.

As already mentioned, laser printers are quiet — I can still listen to the radio as I print — and they are also fast. The speed of a printer is normally measured in characters per second (cps). Laser printers, being page printers, have their speeds measured in pages per minute (ppm): The cheapest can work at 6ppm, though 8ppm is quite common.

Costs are higher

Running a laser printer is generally about three times more expensive than running a standard dot-matrix printer, taking consumables such as paper and toner into account. Toner is supplied in cartridge form and small units suitable for 1500 copies cost £30, a figure which rises to £100 for 4000 pages of average use. It is possible — although not easy — to get the cartridge refilled for about half the cost of a new one.

Another cost is servicing. A laser engine does not have an infinite life, and usually requires major servicing at about 100,000 pages. The quoted life of a laser engine is between 300,000 and 500,000 pages, though this can nor-

mally be extended quite significantly with regular cleaning and servicing. But even rated at 300,000 pages it's likely to last for many years.

The final output from the laser printer is of a very high quality, in fact so high that pages are often used as final artwork from which books are produced: The American version of Douglas Adams' Dirk Gently's Holistic Detective Agency and View: A Dabhand Guide are typical examples. It is also very likely that your local newspaper is produced in this way.

The measure of quality is a subjective one, but it is directly related to the printer's resolution, a value measured in the number of dots it can print in a line one inch long — dpi for short. The standard resolution for laser printers is 300dpi, although newer and more expensive breeds are now offering 600dpi.

The resolution of a standard 9-pin dot-matrix printer has normally been defined as a quantitative term expressed as single, double or quad density. In dpi these values fall out at roughly 60, 120 and 240 dpi respectively, while the 24-pin device can offer 360dpi. The last figure is somewhat higher than the 300dpi of the laser — but the quality is still inferior.

Why? The answer is two-fold: The dots used to construct the 24-pin output are much coarser than the fine toner particles used in a laser printer and, being a mechanical printing mechanism, the print head and ribbon degrade with every

Turn to Page 28 ►

Figure 1:
A typical
PostScript
program

```
%!
%% Reverse Printing
%% for PostScript Laser printer
%% Bruce Smith and Paul Martin
%% Micro User

clippath pathbox
/ty exch 36 sub def
/ty exch 36 sub def
/by exch 36 add def
/bx exch 36 add def
newpath
bx by moveto
bx ty lineto
tx ty lineto
tx by lineto
closepath

gsave .99 setgray fill

grestore
5 setlinewidth
1 setlinejoin
stroke

/str (Alice through the looking
glass.) def
newpath
/Times-Italic findfont
[0 50 50 0 0] makefont setfont
bx tx add str stringwidth
pop sub 2 div
by ty add str stringwidth
exch pop sub 2 div
moveto
str show
showpage

%% All done!
```


◀ From Page 27

pass of the print head.

Another big plus in favour of the laser is that the range of fonts – typefaces – available is significantly increased. A basic set of fonts is built into each printer and is available the moment you switch on. However, most laser printers will allow you to add more, either by using a downloadable font, where the font is stored on disc and loaded into the printers on-board ram via the computer – a facility available on many dot-matrix printers – or by plugging a font cartridge into a special port in the printer.

All laser printers are fitted with a micro which contains ram, and the amount of memory is very important as it determines the complexity of the page that can be printed and the speed. Like all printers the quoted speeds are always for best-case situations. In reality they are often much slower – complex pages take longer to print as there is considerably more work for the printer to do.

Page printers work by storing a bit image of the page for printing in memory. A standard A4 page of text/graphics occupies about 90 square inches of paper, which at 300dpi will need nearly a megabyte of ram.

Most laser printers have at least 512k of ram fitted – excellent for text only, but cumbersome when large quantities of graphics are used. The ideal figure is 1.5Mb, though this can be expensive.

The standard by which all printers are measured is the Epson FX80 – if a printer can act as though it were an FX80 it is said to be Epson-compatible, and most laser printers are.

However, the Epson standard is just

Figure II: The PostScript program result

Alice through the looking-glass

one of many that exist in the business world and almost all laser printers can emulate other standards. Typical emulation modes include Hewlett Packard LaserJet Plus, IBM and Diablo 630. However, only a limited number can offer a Page Description Language – PDL – as their driving force.

Laser printers can be classified under two broad headings – intelligent and dumb. Most traditional printers fall into the latter category as the printer must be told to output each individual dot or character on the page. This is done by the computer sending a special code which is recognised and translated into dots which are in turn printed on paper. When a laser printer is operating in an emulation mode it is acting in this way.

The more expensive “intelligent” laser printer supports a PDL. When instructed, the associated software does not send an image of the page to the printer, but rather sends a description of the page in the form of a PDL program. This is decoded by the laser printer’s on-board computer, which then turns the page description to toner on the paper.

Page description languages are very sophisticated and must be capable of describing all aspects of composition. They will accept commands for font selection, highlighting, font size and orientation, and all the usual graphics commands. They also offer the programmer a new and rewarding challenge from which some quite amazing results can be obtained in the form of printed output.

However, the most important aspect of a page description language, and the reason why it is so very important, is that it is resolution independent. No matter what the resolution of the printing device being used the PDL will use it to full potential – without loss of clarity. There are several PDLs available, but the *de facto* standard is called PostScript.

But you can’t use a language like this unless the software you are using supports it. For several years Acorn has had a special program called PPS which is a PostScript printer driver for View. This understands a number of new View stored commands which can be used to select all the different laser printer effects. The program is not generally available and is unlikely to be – so don’t phone Acorn about it.

However, as a PostScript program is nothing more than an Ascii file, it can be written using a word processor and sent directly to the laser printer. Figure I shows a typical PostScript program and Figure II the final printed result.

All this technology doesn’t come cheap and for a basic laser printer you can expect to pay at least £1500 and up to £6000 for a good PostScript device. But that said, I can remember the days of the £500 single 40-track disc drive and £400 dot-matrix. This time next year you can expect the prices of today’s laser printers to be about the same. Ignore them at your own peril.

How a laser printer works

A laser printer does not work by burning an image on to a sheet of paper, but it does contain a real laser. Like any similar device it emits a small amount of radiation, and so the casing it is housed in has to conform to very strict BS standards.

When a page is sent to the printer it is sent in the form of a bit image, just like a screen display in Mode 0 where 0s and 1s are used to represent black and white.

Once in the printer’s ram the on-board computer sets the internal mechanics into action. First a light-sensitive drum begins to rotate and has a negative charge placed across it. The laser beam is then strobed very rapidly across the width of the drum firing a burst of light at each point where part of the image will fall.

Extreme accuracy is called for here – the drum loses its negative charge where the beam hits.

As the drum turns it comes into contact with the negatively charged toner. Basic physics states that like poles repel, so the toner does not stick to the negatively charged areas – only those which have no charge following the passage of the laser. The net effect is that toner adheres to where the laser has been.

The paper has at this stage been given a positive charge as it passes through the printer, so the negative toner particles held on the drum are attracted to it. The charge only lasts for a short while, so the toner is bonded on to the paper by passing it through heated rollers and ultimately into your hands.



Product: Epson GQ3500
Price: £1498.80+VAT (complete package)
Supplier: Datathorn, George House, 50 Spring Road, Laughton, Essex IG10 4QD
Tel: 01-508 4904

SOLIDISK Technology

Everything from
Acorn
With a little More!

Computers
Memory
Disc Drives
Repairs

Orders and enquiries can now be placed by FAX (0702) 431 221



THE PC-500:

The PC-500 is just what you need to take advantage of the biggest software investment on earth: PC software, PC public domain and PC shareware.

The PC-500 is the Acorn 80186 internal co-processor for the MASTER adapted by Solidisk with an appropriate lead for use on the BEEB (and the Master).

It has a mouse, 512K of RAM, 10MHz — 16 bit CPU (around 3 times the speed of the normal PC), 4 software discs containing the Digital GEM operating system, a wordprocessor, a painting program, CPM emulator and other utilities.

Price: £239 inclusive. Your BEEB must have a WD-1770 and ADFS.

Data sheet available on request.

THE PC-PLUS:

The PC-PLUS is an expanded PC-500, with one Megabyte of RAM instead of 512K. The extra memory allows large applications such as Desk Top Publishing (eg Fleet Street Editor) to be used on the BEEB or the MASTER.

The PC-PLUS is supplied with the same accessories as the PC-500 including the mouse and 4 discs. Price £339 inc.

Upgrade from an existing Acorn 80186 costs £119.00 but you will be required to sign a service agreement. Please ring for details.

Data sheet available on request.


MASTER MEGA CARD:

The MEGA CARD (256K) plugs into a cartridge slot on the MASTER and adds instantly 256K of RAM. The card can be used as RAMDISK, printer buffer or sideways RAM. Price £100.00 inc.

Data sheet available on request.

It's Easy
To Masterise
Your Beeb

With Solidisk
Add-Ons!




DOUBLE-SIDED 5 1/4" DISC DRIVE

This is a superb 80 track, double-sided, dual density, lever type and very fast disc drive. Unformatted capacity: one Megabyte. 40/80 track manual switch optional as most Acorn and Solidisk DFS have software switch. Supplied with data and power lead (please specify your computer). Price £119.00 inc VAT. 40/80 track manual switch if required: £2.00 inc VAT. Separate PSU if required: £25.00 inc VAT.

TWIN DOUBLE-SIDED 5 1/4" DISC DRIVES

Complete with bridge unit, suitable for both BBC and Master 128K. Price £238.00 inc VAT.



WD-1770 DFS:

The new Acorn Disc Filing Systems DFS and ADFS require both the WD-1770 chip. Solidisk offers two basic WD-1770 models which are totally compatible with the Acorn DFS/ADFS ROMs. We also offer our own DFS 2.2 and ADFS 2.1 ROMs which have a superset of utilities and commands. Data sheets on these ROMs are available on request.

1) WD-1770 DUAL DENSITY DISC INTERFACE for previously tape based BEEB. This is the standard Acorn disc upgrade since 1985. Prices are:

WD-1770 DDFS without DFS ROM £35.00 inc.

WD-1770 DDFS with DFS 2.2 ROM £45.00 inc.

WD-1770 DDFS with ADFS 2.1 ROM set £55.00 inc.

Data sheet available on request.

2) WD-1770+8271 (DFDC) DISC INTERFACE: for BEEB already equipped with the 8271. This system allows you to keep the existing 8271 disc interface while adding the new WD-1770 chip. It has a simple switch to allow changing between the 8271 and the WD-1770. To operate the hardware, you will need either the latest ROMs from Acorn (8271 DNFS 1.2, 1770 DNFS and 1770 ADFS) or Solidisk ROMs. If you are stuck with old or inappropriate DFS software, buy the inexpensive DFS 2.2 ROM. Prices are:

DFDC without DFS ROM £45.00 inc.

DFDC with DFS 2.2 ROM £50.00 inc.

DFDC with ADFS 2.1 ROM set £55.00 inc.

DFDC with 2.2 and 2.1 set (3 ROMs) £63.00 inc.

Data sheet available on request.

TWOMEG 128K: Number One Best Seller!

The new style TWOMEG 128K add-on board for the BBC is the closest emulation of the Master 128K ever achieved. It combines Sideways RAM, Shadow RAM and four extra Eeprom sockets (4 on the BBC motherboard) in a single product. It is unobtrusive and easy to fit, just drop in and go!

It's the ideal upgrade for all Bees, with more ROM sockets and even bigger memory than the Master! Compatible with Computer Concepts InterWord, Sheet and Spellmaster, Acorn View 3.1, ViewSheet, ViewStore and Basic, it is supplied with a quantity of useful software on five discs, eg database, spelling checker, macro basic, Ramdisk for STL DFS and ADFS etc.

A clever switch write-protects only the 8 banks of Sideways RAM, without affecting the Shadow RAM. Price: ex VAT: £52.17, inc VAT £60.00

FOURMEG 256K:

256K RAM (shadow and/or Sideways) 4 extra H/C ROM sockets on board (4 on BBC motherboard), 4MHz switchable CMOS 65C02 cpu, 32K Manager ROM. Price £110.00 inc VAT.

TWOMEG 256K:

256K RAM (shadow and/or Sideways) 4 extra H/C ROM sockets on board (4 on BBC motherboard), 2MHz CMOS 65C02 cpu, 32K Manager ROM.

Special Offer on InterWord and Wordwise Plus when purchased with any TWOMEG or FOURMEG board:

Wordwise Plus: £30.00 inc VAT

InterWord: £50.00 inc VAT

REAL TIME CLOCK:

gives your Beeb time, date and configure facilities similar to the Master. Price £29.00 inc VAT.


SWR32: 32K Sideways RAM, base unit and disc. Price £20.00 inc VAT. SWR 64: 64K Sideways RAM, 2 H/C ROM sockets on board, base unit and disc. Price £30.00 inc VAT.

EPROM PROGRAMMER:


The UVIPROM is the cheapest Eeprom programmer on the market, yet the easiest to use. UVIPROM for programming 2764 and 27128 (21V): £20 UVIPROM-32 for programming 27256 (12.5V): £20 inc VAT. MULTIPROM, the deluxe version, programs most types of Eeproms and fitted with TEXTTOOL ZIP socket, Price £44.50 inc VAT. The UVIPAC (Eeprom Eraser) can erase any 3 Eeproms in approximately 15 minutes, Price £20.00 inc VAT.

MASTERPLAN:


If you are thinking of exchanging your BEEB for a MASTER or an ARCHIMEDES, Solidisk MASTERPLAN is for you. We can quote immediately over the phone the buy-back value of your BEEB and the balance on your new system. So please give us a try!

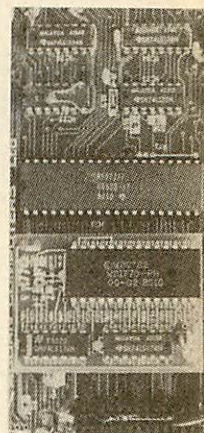

WD-1770 DFS



1770 + 8271

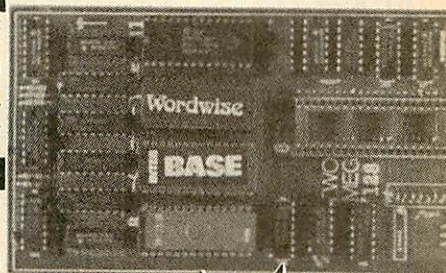

TWO MEG 128





p&h electronics Ltd

5 THE PARADE · YATELEY
HANTS
TEL: 0252 877222

24 HR SALES LINE
0252 878107

3 mins Jct 3 M3
22/24 GUILDFORD ROAD
BAGSHOT · SURREY
TEL: BAGSHOT 0276 74533

Archimedes

A305 Base System	£760.00
A305 Mono System	£820.00
A305 Colour System	£975.00
A310 Base System	£845.00
A310 Mono System	£900.00
A310 Colour System	£1065.00
PC COMPATIBLE	
310M Base System	£910.00
310M Mono System	£970.00
310M Colour System	£1130.00
BBC MASTER SERIES	
Master 128k	£430.00
Master Turbo Upgrade	£120.00
Master 512 Upgrade	£215.00

VAT Inclusive

Z88 LAPTOP

SPECIAL
£275.00

COMPACT SOFTWARE ON 3.5" DISC

Micropower Magic 10	£8.50
Acornsoft Hits Vol 1	£13.50
Acornsoft Hits Vol 2	£13.50
Best for Language	£18.00
Best for Maths	£18.00
Elite	£18.00
Galaforce	£13.50
Games Disc	£13.50
Games Disc 1	£11.50
Games Disc 2	£11.50
Karate Combat	£13.50
Repton 3	£13.50
Revs 4 Tracks	£18.00
Speech	£13.50
Steve Davis Snooker	£11.50
Strykers Run	£13.50
US Drag Racing	£10.50
Viewsheet	£52.00
Vindaloo	£10.50
Winter Olympics	£10.50
Superior Collection 1	£13.50
Superior Collection 2	£13.50
Grand Prix Construction Set	£13.50
Repton Around the World	£9.00
Codenamed Droid	£13.50
Crazee Rider	£14.50
Palace of Magic	£13.50
Play It Again Sam	£13.50
The Life of Repton	£9.50
Elixir	£13.50
Bonecruncher	£12.50

TOP GAMES

Play It Again Sam	Cass £9.95	Disc £11.95
Elite	Cass £11.50	Disc £13.50
Revs	Cass £11.50	Disc £13.50
Repton 3	Cass £8.50	Disc £10.50
Scrabble	Cass £12.50	Disc £17.00
Monopoly	Cass £12.50	Disc £14.50
Ravenskull	£8.50	Disc £10.50
Aviator	Cass £13.50	Disc £16.50
Strykers Run	Cass £8.50	Disc £10.50
Superior Collection I	Cass £8.50	Disc £10.50
Superior Collection II	Cass £8.50	Disc £10.50
Starquake	Cass £7.50	Disc £10.50
Grand Prix Construction Set	Cass £9.00	Disc £10.50
Colossus Chess	Cass £9.00	Disc £13.50
Imogen	Cass £8.50	Disc £ 9.50
Cholo		Disc £16.50
Don Junz	Cass £2.99	Disc £7.95
Paper Boy	Cass £9.50	Disc £14.50
Repton Around the World	Cass £6.50	Disc £7.50
Codenamed Droid	Cass £9.00	Disc £10.50
Crazee Rider	Cass £9.00	Disc £11.50
Arkanoid	Cass £9.00	Disc £11.50
Palace of Magic	£9.00	£11.00
Five Star Games II	£9.00	
The Life of Repton	Cass £6.50	Disc £7.50
Elixir	Cass £9.00	Disc £11.00
Evening Star (Train Sim)	Cass £9.00	Disc £14.00
Zarch (For Archimedes)		Disc £18.00
Bonecruncher	Cass £8.50	Disc £10.00

ROMS UTILITIES

Interword	£46.00
Interbase	£62.00
Intersheet	£41.00
Interchart	£27.00
Spellmaster	£50.00
Mega-3 Rom * New	£85.00
* Word + Sheet + Chart in 1 Rom	

Cumana Disc Drives

(The best and Beab approved) See our low prices

CSX100 100K 40T	£105.00
CSX400/S 400K D/S 40/80T Switchable	£140.00
CS100 100K 40T With Power supply	£135.00
CS400/S 400K D/S 40/80 With Power supply	£165.00
CDX800/S Dual 400K 40/80 Switchable	£260.00
CD800/S Dual 400K 40/80 With Power supply	£315.00
1770 Upgrade	£50.00

AMSTRAD SYSTEMS

PCW 8256	£333.50
PCW 8512	£442.75
PCW 9512	£540.50
1512 SD MM	£442.75
1512 SD CM	£598.00
1512 DD MM	£552.00
1512 DD CM	£707.25
1640 SD MD	£546.25
1640 DD MD	£644.00
1640 HD MD	£966.00
1640 SD CD	£707.25
1640 DD CD	£805.00
1640 HD CD	£1127.00
1640 SD ECD	£882.50
1640 DD ECD	£954.50
1640 HD ECD	£1288.00

NEW LAPTOP	
PPC 512S Single Drive	£448.00
PPC 640S with Modern	£545.00
PPC 512D Dual Drive	£540.00
PPC 640D with Modern	£640.00

VAT Inclusive

**Panasonic KXP1081 Dot Matrix
Printer**
GREAT £165.00
includes VAT

ARARI COMPUTERS

520	£285.00
1040 + Mono Monitor	£475.00
SM125 Mono Monitor	£140.00
SC1224 Colour Monitor	£375.00

PSION HAND HELD COMPUTER SYSTEM

Psion Organiser II CM	£89.00
Psion Organiser II XP	£125.00
Datapack 8K	£11.50
Datapack 16K	£18.00
Maths Pack	£27.00
Finance Pack	£27.00
Spreadsheet (XP only)	£36.00

Psion Full Range Available
VAT Inclusive

AMX MOUSE PRODUCTS

New AMX Mouse	£34.00
New Mouse + Super Art	£72.00
Stop Press	£38.00
Super Art	£38.00
Max	£18.00
Page Maker	£45.00
Extra Extra	£19.00
Design	£63.00
3D Zicon	£23.00
Desk	£22.00
Mouse Mat	£6.00

ACORN SOFTWARE BOOKS

Graphs and Charts	£7.50
Comal Manual	£10.00
BCPL Manual	£15.00
ISO Pascal Manual	£10.00
View Guide	£10.00
Viewsheets Guide	£10.00
Viewstore Manual	£10.00
Master Reference Manual Part 1	£14.95
Master Reference Manual Part 2	£14.95
Logo Manual	£7.50
BBC User Guide	£12.95
Into View 2.1	£5.00
Micro Prolog	£10.00
Creative Sound	£9.95
Advanced Master User Guide	£19.95

ACCESSORIES

Data Recorder	£29.00
Data Recorder - BBC Lead	£4.00
Full Proportional Joy Stick	£12.50
Full Proportional Joy Stick Pair	£20.00
Modern Nightingale with Commstar	£149.00
5.25in Discs 10 in Library Case DS/DD 96ipi	£16.00
TV Aerial/Computer Switch	£2.50
Function Key Mask	£3.00
Computer Covers Soft	£5.50
Printer Covers - State type	£6.50
Disc Drive Covers - State type	£5.00
Digital Mouse (by NIDD) with grafik	£35.00
Digital Mouse (by NIDD) with artroom	£54.00
Printer Ribbons - State Type	£5.50

COMPUTER BOOKS

15 Hour Word Proc Use BBC View	£5.95
30 Hour BASIC Standard Ed.	£7.95
40 Best Mach Code Routine BBC	£7.95
6502 Develop Pack (6502 2nd Pro)	£7.50
Advanced Disk User Guide	£16.95
Advanced Graphics with the BBC	£9.95
Advanced User Guide (BBC)	£15.95
Advanced User Guide - Binder	£3.91
Applied Assembly Language BBC	£9.95
Assembly Language Prog for the BBC	£8.95
BASIC ROM User Guide (BBC/Electron)	£11.95
BBC B Compendium	£5.95
BBC Master 128/ High Flyers	£10.95
BCPL The Language & Compiler	£7.50
Complete Disc Manual - BB	£7.95
Creative Assembler BBC/Electron	£5.95
Disk Programming Tech for BBC	£10.95
File Handling on BBC Micro	£6.95
Making Most Your BBC Disc system	£5.95
Mastering Assembly Code BBC	£8.95
Mastering Music BBC	£6.95
Mastering the Disc Drive	£7.95
Structured Basic	£7.25
The BBC Micro Rom Book	£10.95
Within The BBC Microcomputer	£13.95
Wordwise Plus	£9.95
Practical Disc File Techniques	£5.95
6502 Applications	£13.95
6502 Reference Guide	£9.95
Programming the 6502	£16.95
6502 Ass Lang Prog 2nd Ed.	£19.95
Mastering View/Viewsheets/Viewstore	£12.95
Archimedes Assembly Language	£12.95

TO CLEAR Cassette Games all at £3 each

BBC		Red Arrows
Repton		Star Drifter
Repton 2		Fat Man Sam
Alien Dropout		Tapper
Bandits at 3 O'Clock		Wizardore
French Mistress		Five Star Games
Escape from Moonbase		
Alpha		ELECTRON
Old Father Time		Yie Ar Kung Fu II
Exploding Fist		Paperpack
Happy Letters		Caveman Capers
Flight Path 737		Last of the Free
Thunderstruck		Thunderstruck
Last of the Free		French Mistress
N/S Utility		Mini Office
Caveman Capers		Micropower Hits II
Powerpack		Galaforce
Lord of Rings		Ravenskull
Winter Wonderland		Superior Collection 3
War		Kayleth

Prices include VAT at 15%



ORDERS WELCOMED



Instant Credit up to £1000 for callers only at both shops.
Order by Phone or Letter

P&H ELECTRONICS LTD.
22/24 GUILDFORD ROAD
BAGSHOT, SURREY GU19 5JN

Carriage Costs (including BFPO) Per Item

Books, Software	Carriage Free
Upgrades, Accessories etc.	£2.00
Disc Drives, Data Recorders	£5.00
Micros, Monitors, Printers	£9.00

SOFTWARE SCENE

Skirmish ... battling buzzards

Price: £9.95 (cassette), £11.95 (5¼" disc), £14.95 (Master Compact disc)

Supplier: Godax, 12, Chiltern Enterprise Centre, Theale, Berkshire RG7 4AA.

Tel: 0734 302600

IMAGINE a world in which you sit atop a giant blue ostrich and engage in medieval-style jousting contests with opponents riding giant green buzzards. This is the setting for Joust, Atari's smash arcade hit.

It sets itself apart from most other games by taking the idea of a two-player game one stage further – you play not only against another human opponent, but also against a number of computer opponents. Thus half a dozen combatants can be on the screen at once, each doing his/her/its own thing. This multi-player/multi-baddie idea has since been expanded to produce the staggeringly successful Gauntlet.

Now we have Skirmish, a superb conversion of this arcade favourite. I first heard of the game over a year ago, and the finished product proves to be very well worth the wait.

From the outset, it sets out to impress. The cassette loader features a remarkably good idea that until now I had only seen on Gary Partis's games. The screen actually shows you – via a countdown timer – how long you must wait for the rest of the game to load.

Another Partis-like feature is that you are presented with a full set of scrolling instructions while the main game code is loading – clever.

Once the game has loaded, three Jet-Pac-style landing stages are displayed, and you are invited to start the game.

Upon doing so, I found that the player sprites look rather messy, because of the crammed-in detail. Aside from this minor point, Skirmish faithfully recreates all the addictive qualities of the arcade original.


The controls are simple: Left, right and flap. The last control causes your bird to flap its wings once. Press it repeatedly to hover, and faster still to gain height. Being able to hover and manoeuvre well is the key to the game.

Skirmish features three different types of computer-controlled rider: The Bounders, wearing red armour, are fairly easy to defeat. The Hunters are more cunning, and the Shadow Lords are virtually impossible to dismount. The early stages feature only red Knights – cannon-fodder to an expert, but more than difficult for the novice.

To win a joust, you must fly into any opposing player, making sure that your lance is higher than his. If you are successful, you will be rewarded with a satisfying *THWACK* sound.

A vanquished human opponent simply loses a life and reappears somewhere else on the screen. However, a computer opponent falls off his mount and turns into an egg, while his riderless buzzard flies off into the distance.

You must grab this egg within a certain time period, or it will hatch, spawning a rider of the next grade. His buzzard

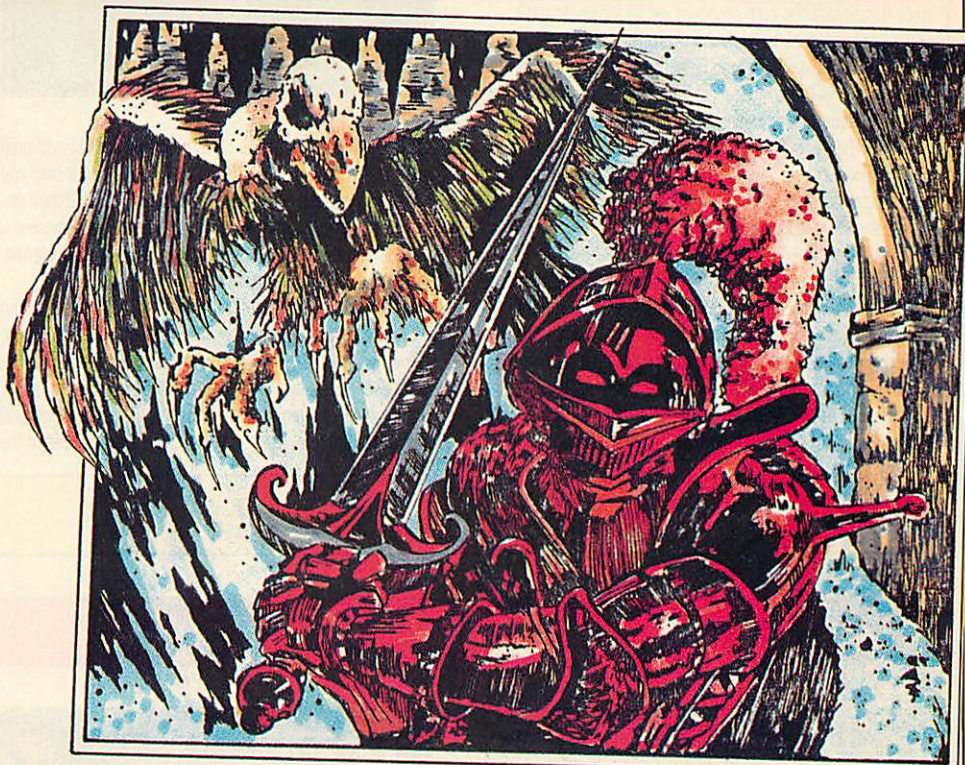

will then reappear: If it gets to him before you do, he's back in play with a vengeance.

If your opponent's lance is higher than yours, you will die and your bird will fly mournfully away. You soon learn to fly to the top of the screen as quickly as possible, but even this commanding position is by no means safe.

The buzzard riders have a nasty habit of ganging up on one player – it's great to play the hero and swoop down from the skies to rescue your teammate from their clutches.

When all the computer-controlled riders have been defeated, the next wave begins. Later stages add even more nasties – the Lava Troll that stalks along the bottom of the

screen ready to grab any foolhardy contestant who comes too close, and the indestructible Pterodactyl that flies backwards and forwards until the wave has ended. The Pterodactyl can appear on earlier waves if you take too long to defeat your opponents – give it lots of air-space.

Skirmish provides all the useful features that make all the difference to any good game: Pause/restart, sound on/off and quit game are all included. Keyboard and joystick are supported in both one- and two-player modes.

Joystick control is almost essential for the two-player option, but Skirmish takes this feature one stage further. Press the fire button on joystick 1 for a one-player game and that on joystick 2 for a two-player bash. No sooner has one game ended than another can begin – an invaluable feature for a game this compulsive.

I can recommend Skirmish wholeheartedly. It is one of the most playable games I have ever seen and will certainly lead to a severe case of repeated late nights. To quote the loading commentary: Prepare to joust, buzzard bait.

Hac-Man

Sound	8
Graphics	7
Playability	11
Value for money	9
Overall	9

SOFTWARE SCENE

Black Queen ... play better Bridge


Price: £14.95 (disc)
Supplier: BBC Soft, PO Box 234, London SE1 3TH.
Tel: 01-576 0584

BBC SOFT'S White Knight is one of the finest chess programs available for the BBC range of computers. The company has now released Black Queen, a contract bridge program – but does it maintain the high standard set by White Knight?

It is described as being suitable for both beginners and club players. As someone who hasn't played bridge since his sixth form days I was most grateful for the well laid out and informative manual supplied with the game.

Unlike the majority of programs these days, this one openly encourages you to make a working copy of the unprotected software. This is most advisable as you save the hand, and accompanying bid, on the actual program disc before play commences.

As in the real game, you must first deal the cards before bidding can begin. The deal can be a fresh one – shuffling and dealing a new pack of cards – or you may choose to reload a previous deal that has been stored on disc. In either case bidding continues until there have been three consecutive passes. At this stage you can save the deal and bid to disc, or select the play option from the main menu.

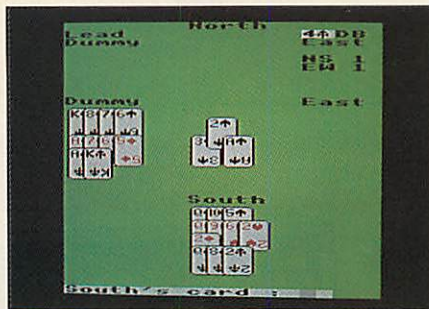

Play commences with the cards being set out in traditional N.S.E and W fashion. Two hands are visible – your own and the dummy hand. If you were the declarer of the bid then you play both the North (dummy) and South hands, otherwise you play the South hand only. The cards are large, well designed, and laid out in an easy-to-read fashion.

As play proceeds, the bid, the number of tricks won, and the last card led are displayed on the screen at all times. Following the thirteenth trick, a detailed breakdown of the current score is shown along with a sub-menu of five options.

If you are satisfied with the way that the game went, you can update the total score. If you found that you underbid the

hand quite badly, you may choose to rebid and play it again.

You could have made a mistake that resulted in your losing several subsequent tricks – in this case you can choose to play the hand again. Option four lets you peek at all four hands before making a decision, and the fifth option returns you to the main menu.

This very flexible approach reinforces the educational aspect of the package – a player may replay the same hand many times with increasingly adventurous bids.

The final feature of Black Queen is a facility that allows the construction of deals – manually putting together four hands from the 52 cards available. This may be used for tackling bridge problems found in newspapers and magazines, or as a way of weighting one or more hands with specific cards.

Black Queen is a first-rate bridge program and most definitely a worthy stablemate for BBC Soft's White Knight chess.

Steve Brook

Sound	N/A
Graphics	8
Playability	9
Value for money	8
Overall	9

Bonecruncher ... skeleton soap opera

Price: £9.95 (cassette), £11.95 (disc)
Supplier: Superior Software, Regent House, Skinner Lane
Leeds LS7 1AX.
Tel: 0532 459453


IN Bonecruncher you play the unlikely part of Bono, a little green dragon who lives in a castle by the sea. As an enterprising dragon, you have set up Bono's Bathing Company making skeleton soap, a commodity much prized by the giant monsters who bathe in the moat.

As every good business-dragon knows, real skeleton soap is made only from real skeletons: To keep the customers happy you must collect all the skeletons littered around the castle and boil them in your cauldron. This turns them into the luxurious soap, and voilà, another satisfied customer.

However, the castle is anything but a safe place. There are a number of trapdoors through which you could disappear without trace. Another unnerving fact is that some of the skeletons are not skeletons yet – they're very alive, very deadly monsters with an insatiable appetite for you.

A further hazard appears in the shape of giant spiders that rush around the walls biting any hapless dragons in their paths. The spiders will also eat any bones they may find: On some levels you must race the spiders to collect the skeletons. The castle is also inhabited by Glookos – large white creatures who love the smell of soap.

When you have climbed up a stairway to supply another customer with a bar of soap, the Glookos will – after a short

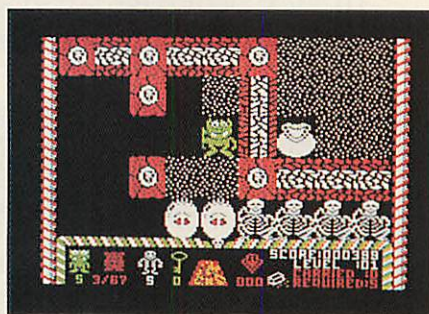

delay – all move in the direction faced by this stairway. Although a Glooko is not in itself harmful, it will crush you if you get in its way when it's moving.

An added problem is that you may find yourself, or the way forward, blocked by Glookos if you are unfortunate enough to take a bar of soap up the wrong stairway. However, you can push a Glooko – or take advantage of the direction in which it is trying to move – so as to suffocate monsters and turn them into skeletons.

Fortunately, Bono's Bathing Company is not a one-man show. Your partner Fozzy is the brawn of the operation and is strong enough to hold monsters and spiders at bay. However, he is not very bright, and you must always keep an eye on him

to make sure that he is not trapped or wandering round in circles.

Bonecruncher is very similar in appearance to Superior's classic Repton, with smooth four-directional scrolling and often fiendish puzzles. If you want to you can see it almost as an exact copy of Repton – diamonds are replaced by skeletons, spiders by spiders, skulls become trapdoors and so on.

On anything but a superficial level, however, the two games are quite different. The addition of Fozzy and the Glookos brings an entirely new dimension – for example, movement of the Glookos causes the layout of each chamber to change repeatedly around you.

The humour in Bonecruncher is probably the game's most appealing aspect. The skeletons grin at you and tap their feet expectantly and, if you stand still for more than a few seconds, Bono will start to yawn and stamp his foot impatiently. The monsters are also beautifully animated, jumping up and down showing a mouthful of teeth.

Bonecruncher will delight game players of all ages: Another sure-fire hit.

Hac-Man

Sound	8
Graphics	9
Playability	9
Value for money	9
Overall	9

SOFTWARE SCENE

Three from Blue Ribbon ... cheap and cheerful


Products: *Bar Billiards*, *Return of R2* and *Video Card Arcade*
Price: each £1.99
Supplier: Blue Ribbon, CDS House, Beckett Road, Doncaster
DN2 4AD.
Tel: 0302 21134

IT'S good to see continued support for Acorn Computers from budget-priced software houses. Blue Ribbon has another collection of games of luck, skill and strategy on offer.

Bar Billiards is a re-release of an old favourite of mine. The game is a simulation of the classic pub game for one or two players and is ideally suited to the computer, being simple in rules and without too much fast movement.

The basic aim is to pot balls down holes in a table, without knocking over the pegs which stand precariously in front of the higher scoring holes. You place a ball somewhere in a small D shape at one end of the table and cue it against other balls. It doesn't matter which ones go down – all score points, with the red ball always worth double.

Your break ends if you fail to pot a ball, but knocking over a

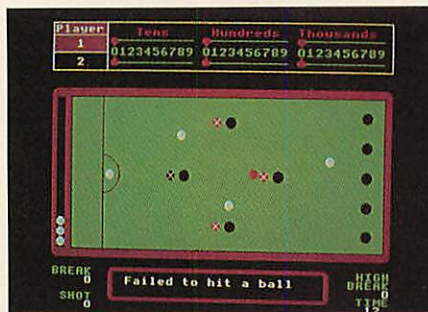

white peg loses any score made in that break. Knocking down the black peg loses your entire score – the ultimate disaster. To avoid this, you can vary the strength of your shot and can also use top spin, back spin or a normal shot.

The only problem I encountered was a tendency for the ball to follow a curved path. Perhaps Blue Ribbon should level its table. That apart, this is a worthy simulation and well worth adding to your collection.




Sound	7
Graphics	5
Playability	7
Value for money	8
Overall	7

Video Card Arcade gives you a chance to play three different gambling style card games – all on your own and with no risk of financial ruin.

The first is Poker Royal. You are dealt five cards and have the option of discarding any number of them and having that number redealt. Your hand is then valued against a score table. Most of the time you will score zero, but occasionally you may get three cards the same and score a few points. Each hand costs you one credit point – you start with 20 of these, so you get 20 hands. I was bored with this game before using up my 20 credits.

Next comes Twenty One. This is a version of pontoon which is played against the computer, with a scoring system which means you can get more points for a five card trick or a pontoon. Twenty One is quite playable, but more fun if you use a pack of cards and a human opponent.

The third part of this trilogy is High/Low. This is based on a popular TV game and you must guess whether the next card turned will be higher or lower than the previous one. Again, there is a points system, with lots of points awarded if you

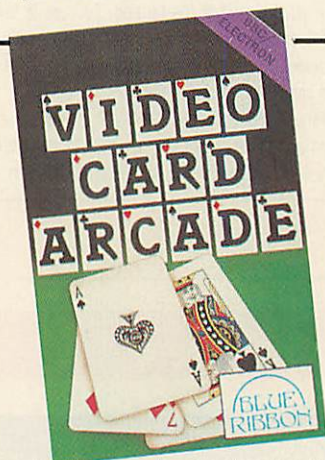

get four cards of the same value – a combination which is not actually possible.

In the TV game, contestants are playing for points – and points, of course, make prizes. There is very little fun in this version, with a silly scoring system and no prizes. In fact, I can't really imagine who would want Video Card Arcade.



Sound	4
Graphics	7
Playability	2
Value for money	3
Overall	3

Return of R2 falls into the arcade adventure category. Your task is to steer a robot – R2 – around the planet Zelger to collect the boxes of Z42 compound. Three of these must be taken to the power room of Zelger to keep up the energy supplies. This task has to be completed within the time limit which is said to be 20 minutes.

Ranked against you are large numbers of radio-active barriers, laser bolt guns, a weird fire-breathing Buddha – or is it a dragon? and planks which suddenly fly at you. Your only controls are left, right, up and down.

The animation is quite good, being based on the technique called filmation. Each room is shown in 3D with a number of exits which look rather like a part of Stonehenge.

When you start playing you seem limited to a fairly small number of screens. A box can be seen in the corner of one, but it is totally protected by barriers.

After a period of frustration, you may wonder why the wall



in one room seems to have a slight defect in its make up, but that little hole in the wall holds the key to getting any further.

Master that trick and you can wander along many a mile of similar passageways, avoiding laser bolts and barriers, and

eventually finding all three boxes. The 20 minute limit does not seem to apply, but it gives you some idea of the time you are likely to have to spend to actually complete all the tasks. Of course, it will take longer to learn what you have to do.

R2 is not a game to rave over – and it will not be a classic – but represents fair value at the price. It will probably mean no more than one evening's worth of work/enjoyment to people used to this type of program.

Rog Frost

Sound	7
Graphics	4
Playability	5
Value for money	6
Overall	6



Around the World in 40 Screens



AMERICA



THE ARCTIC



THE ORIENT



THE OCEANS



AFRICA

Repton Returns ... to Conquer the World

After the success of Repton 3, we were overwhelmed with requests for us to publish another set of screens for the game. We have now produced 40 new screens which, although enticingly amusing, are even trickier to complete than the original 24 screens of Repton 3.

These new screens feature Repton voyaging around the world. In America, Repton is a sheriff with a penchant for hamburgers and whisky; his job is to jail all the bandits and avenge the Red Indians. The Arctic sees Repton as an eskimo being "hotly" pursued home to his igloo by polar bears and penguins. Across to the Orient, and Repton is a kung-fu master amongst the pagodas, rickshaws and Chinese dragons. Repton becomes a deep-sea diver in the Oceans; he searches for pearls around the rotting shipwrecks which are inhabited by dangerous octopuses and squids. Finally, in Africa, Repton reaps his rewards by defeating the tribesmen, caging the parrots, and collecting the apples, bananas and pineapples — whilst watching out for falling coconuts!

Each copy of Around The World in 40 Screens includes:

- the Repton 3 main program,
- the Repton 3 editor, and
- the 40 new game screens.


BBC Micro Cassette£6.95

Acorn Electron Cassette ..£6.95

BBC Micro 5¼" Disc£7.95

BBC Master Compact 3½" Disc£9.95

(Compatible with the BBC B, B+ and Master Series computers).
The screen pictures show the BBC Micro version of the game.



THE SCREEN EDITOR



THE CHARACTER EDITOR

PRIZE COMPETITION

If you complete all 40 screens of Around The World, you can enter our competition. Prizes include £200 in cash, with Repton mugs, badges, pens and certificates for runners-up. Closing Date: 31st January, 1988.



FREE REPTON BADGE WITH EVERY GAME SOLD

A colourful Repton badge is included free with every cassette or disc of Around The World in 40 Screens.



ACORNSOFT

Please make all cheques payable to "Superior Software Ltd".



24 HOUR TELEPHONE ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

Dept. A4, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453.

Teri Paul reports on the
wonderful world of
Magic and Mystery

The living Spirit of Adventure

IN an upstairs room of a large detached house in central Manchester sit a BBC Micro, a Master and an Archimedes — right next to a pile of swords, shields and spell books.

And what ties the highest of hi-tech to the world of mystery and mysticism? The business known as Spirit of Adventure.

For the company, renowned for its high-quality live fantasy adventure games, relies heavily on its computer equipment for the day-to-day running of its lo-tech quests.

"It was an obvious step for us", said Steve Turnbull, one of the four directors, "I've been working with BBC Micros for years and when we needed to produce instant quality print they were there"

Spirit of Adventure was conceived just two years ago out of an idea to bring the computer world of adventure games to life.

"It's such a simple concept, we wondered why nobody had thought of it before. After all, while it would be nice to have a castle, caves or dungeons, you don't actually need them — most fantasy stories occur out in the open, travelling from place to place. We've brought the whole genre alive".

The history of fantasy adventure games goes back 15 years. They evolved initially from table top wargames. Then someone had the bright idea of reducing the conflict of whole armies down to a single combat level. This developed into the notion of small groups of individuals working together to achieve a goal — their quest. With the addition of rules to govern the use of magic, the fantasy role-playing game was born.

Since then many different sets of rules have been published, covering all aspects of heroic fantasy — swords and sorcery, science fiction, superheroes, gothic horror, 1930s adventure stories — even modern day spies.

And from this wealth of material live fantasy role-playing was born. "The idea of live role-playing wasn't new, but providing an adventure setting exclusively outdoors was — and it's turned out to be very popular", said Steve Turnbull.

Live role-playing involves each participant creating a fantasy persona which he plays during the adventure. There are several basic character types, including warrior, wizard, warlock and scout, and various racial types, such as humans, elves and dwarves.

Each player takes his character



UMIST as it's never been seen before — and where visitors to the next Electron & BBC Micro User Show will be able to take part in a real-life adventure

through a number of three-hour adventures, and as long as the character survives the trials of dragons, demons and lesser beings, he can gradually build up his strength and power.

"The great advantage of our system of rules", said Steve Gibson, another of the directors, "is that from the basic types each player can create exactly the sort of character he wants. If he wants to be Conan he can start as a warrior and increase his strength and weapon skills. Or to be Gandalf he would start as a wizard and build up in the fire-magic spells".

But how do the three BBC Micros fit in this mass of mayhem and magic?

"Administration is our greatest problem, and that's where the micros come in", said director Pam Turnbull. "We have so many members that keeping track of their addresses, membership status and so on by a manual system would be a nightmare, especially when it comes to writing out addresses on envelopes for the monthly Chronicles newsletter.

"Instead we have an easy-to-use, custom-written database which loads into the Master's sideways ram. With it we can access the members by name, address or even date of joining — plus we can print out labels, lists of names and phone numbers. It's not perfect, but it works".

Then there's the Chronicles themselves, which for the first year were actually set using the BBC Micro. Steve Turnbull again: "We originally used Interword with its column printing facility to produce the galley, and then did the layout by hand.

"We've now moved that on to another computer which does the layout as well,



but with new software becoming available for the Archimedes I can see us returning to a BBC-badged micro".

When you want to take part in a Spirit of Adventure quest the first thing to do is contact them by post or phone. Says

SAFE WEAPONS

The weapons used are composed of high-density closed-cell foam around a stiff central plastic strut. The foam is hand-carved to shape and covered in either fabric-enforced tape or coated in 15 layers of latex.

All the weapons must conform to a certain level of safety, and each is checked before an adventure begins.

director Shelley Gibson, "The one thing we haven't computerised yet is the bookings — the problem is getting the computer next to the phone — but we're working on it".

Having arranged your booking you would be sent travel details and a map of the location where the adventure takes place.

"Unfortunately our locations are often way off the beaten track, so the maps are crucial. New members now get colour maps printed individually using Artisan on the Archimedes and the Integrex Colourjet printer — a very effective combination", said Shelley.

On the day of your adventure you arrive at the location where the Spirit of Adventure van is located and the tents set up.

The team have contemplated using Mike Cook's modification to run a BBC Micro from the van's 12v battery, but the

HAVE AN ADVENTURE

The Electron and Micro User Show in Manchester from March 18 to 20 will have a strong adventures theme, and visitors will have the chance to take part in a mini-quest run by the Spirit of Adventure team.

In addition you will be able to have your computer adventure game queries and problems solved at the Adventure Corner, and take part in the treasure hunt involving many of the exhibitors.

idea has been shelved for the time being.

Newcomers are equipped with swords and costume, but regulars always supply their own. One spin-off company from Spirit of Adventure has been the Medlock Armoury which supplies weapons of all sorts, and Second Skin which provides realistic latex monster masks and other body ornaments — elf ears, beards, warty noses and so on.

A fully trained referee oversees the game, but generally does not interfere as you move from encounter to encounter across the countryside — sometimes fighting, sometimes talking, but always within the role of the character you have chosen.

The referee keeps track of how physically well-off your character is, how many points of magic have been spent in casting spells, and so on. Here again the BBC Micro is unobtrusively present.

Steve Gibson: "We are in the process of computerising the character records. Some programs have been written and tested, but for the time being we are still paper-based. The more complex areas are bound to be the last to go on line".

After your adventure there is a debrief where the referee assesses your performance as the character you chose and awards points. These are used to buy skills to enhance the power of your character, the total points earned by a character being used to assess his overall status.

Shelley Gibson: "Most characters have under 100 points, but one or two have reached over 180 — and that's very high".

The success of Spirit of Adventure has not been startling, but it has been steady — the company has recently acquired a building in Manchester where it runs indoor adventures in addition to the outdoor ones.

Steve Turnbull: "It's been a long grind, but we're now beginning to realise the dreams we had at the start, and we've been helped not least by the BBC Micro".



SMB COMPUTER ELECTRONICS (UK)

UNBEATABLE DEALS

All Computers listed below are inclusive of VAT but carriage is £6 inc. via Securicor within 24 hours in UK on each item.

Items are only available via Mail Order and are covered by our Unique 1 year full guarantee at no extra cost. You can, however, obtain our extended guarantee, backed by and Enormous Insurance Group, on our behalf, at a nominal payment fee for a maximum of 5 years guarantee. Please phone or write to us for further details, conditions and an application form.

BBC COMPUTERS

BBC Master 128K £379
BBC with Turbo Board £486
(inc. 1 unformatted M/Byte Disc Drive with every Turbo purchased this month and complete cables to connect immediately)
512K Processor Board £217.35
Universal 2nd Processor £86.25

BBC MASTER COMPACT RANGE

We have a large selection for you to choose from, as follows

ENTRY SYSTEM

BBC 128K, 640K Disc Drive and Software £360.00

TV SYSTEM

BBC 128K, 640K Drive UHF Modulator and Software £375.00

MONO SYSTEM

BBC 128K, 640K Drive, Software 12" Hi res mono monitor £410.00

COLOUR SYSTEM

BBC 128K, 640K Drive, Software 14" med. res colour monitor £565.00

2nd Drive Kit £113.00

COMPACT ACCESSORIES

2nd 3.5 drive £103.00

Compact RS232 Interface £29.00

PAL TV Adaptor £29.00

Compact 5.25" Disc Lead £12.00

Compact Printer Lead £10.00

ARCHEMEDES at special prices

300 Series

Basic £790.00

Mono (Green) £850.00

Colour £1110.00

310 Series

Basic £865.00

Mono (Green) £925.00

Colour £1100.00

NEW 310 Series

Basic £935.00

Mono (Green) £1015.00

Colour £1175.00

400 Series

Basic £1595.00

Mono (Green) £1650.00

Colour £1823.00

440 Series

Basic £2615.00

Mono (Green) £2680.00

Colour £2850.00

Archimedes information and Booklets available on request.

Archimedes games are available now! For all machines. Please ask for list.

Full range of Pace equipment and software available, please phone for details, authorised dealer and stockist. Trade and education orders welcome.

PRINTERS

Amstrad

DMP 2000 £P.O.A

DMP 3000 £P.O.A

DMP 4000 £P.O.A

New LQ 3500 £P.O.A

Epson

FX80 £P.O.A

LX80 £P.O.A

EX800 £399.00

EX1000 £545.00

FX80 £315.00

FX1000 £439.00

LQ800 £429.00

LQ1000 £585.00

LQ2500 £790.00

LX800 £199.00

SQ2500 £899.00

EPSON Paper Roll Holder £17.00

EX800/1000 Colour Option £55.00

EX800/1000 Colour Ribbon £18.00

FX80/86 Tractor Feed Unit £35.00

FX/LQ/LX800 Single Sheet Feeder £135.00

FX/LQ1000 Single Sheet Feeder £149.00

Hi-80 Refills-Set of 4 pens £7.00

LX800 Tractor Feed Unit £39.00

LX800 Cut Sheet Feeder £75.00

LX1000 Tractor Feed Unit £55.00

Panasonic

Dot Matrix IBM/Epson Compatible

KX-P1081 Special Price £135.00

Daisywheel

KX-P3131 Special Price £240.00

ALSO AVAILABLE

Single Sheet Feeder £190.00

Tractor Feed £85.00

Spare Ribbon £3.00

ACORN-OLIVETTI PRINTERS

JP101 Ink Jet Printer £49.00

(Only available while stocks last)

BROTHER DAISYWHEELS

Special Prices

HR15 'RS232' Daisywheel £270.00

HR20 Daisywheel £329.00

JUKI DAISYWHEELS

Juki 6100 Daisywheel £250.00

Juki 6200 Daisywheel £390.00

Juki 6300 Daisywheel £630.00
Juki 6400 Daisywheel £890.00
Note: All printers inc. FREE lead. Take £2 off a box of Listing paper OR labels, if bought with Printer at same time

PLOTTERS

Hitachi

Hitachi 672 Colour Plotter £475.00

(£20 off our usual price)

RIBBONS

Amstrad

8512/8256 £3.71

Coloured £4.82

Longlife £4.76

Coloured £6.27

Shinwa

CP80 £3.70

Coloured £4.20

Canon

PW1156/1080 £2.85

MX/FX/RX1000/105 £3.10

Coloured £4.20

LQ/LP 1500 £2.90

LQ2500 £4.80

Coloured £3.80

Star

Gemini 10/15 £1.20

Coloured £1.75

NL10 £4.55

Coloured £5.70

Radix 15 £2.50

Coloured £4.25

Epson

FX/MXS/FT/RX/80/85 £2.70

Coloured £2.50

LX80 £2.50

Coloured £3.50

Brother

M1009/GLP £3.10

Coloured £3.95

HR15/25/35 £3.00

Coloured £3.80

Plain Listing Paper

1000 9.5" x 11.5" Fanfold £5.00

2000 9.5" x 11.5" Fanfold £10.00

1000 15" x 11" Fanfold £9.00

1000 Sheets Full A4 Fanfold £11.00

2000 Sheets Full A4 Fanfold £19.00

Teleprinter Roll (Econo Paper) £2.50

(No carr. on less than 5 rolls)

All fanfold has micro perforated feed strips and leaves a smooth clean edge when detached from printer.

Carriage on 1000 sheets £1.50

2000 sheets £2.50

Printer Labels

(Mounted on continuous fanfold sheet)

1000 90 x 36mm (Single Row) £4.50

1000 90 x 36mm (Twin Row) £4.70

1000 90 x 49mm (Twin Row) £7.00

1000 102 x 36mm (Twin Row) £6.00

Carriage on 1000 sheets £1.00

!! Lowest Prices Ever !!

Discs 5.25" and 3.5" (Supplied in plastic boxes of 10)

Fully 100% error free guaranteed

48tpi 5.25" 96tpi 5.25" SS/DD 3.5" DS/DD 3.5"

10 £6.50 £8.75 £8.50 £10.45

20 £8.50 £11.00 £16.00 £19.75

30 £12.75 £14.25 £23.75 £28.50

40 £15.80 £18.00 £31.00 £38.60

50 £18.50 £20.00 £40.00 £47.50

100 £35.00 £37.50 £87.00 £93.00

200 £70.00 £72.00 £113.00 £175.00

500 £170.00 £185.00 £280.00 £427.50

500 + Discs call for prices

Disc Boxes available on request.

100 Disc Box £10.00

50 Disc Box £8.00

Plastic Boxes for 10 discs £1.05 only

Add on £5 for each 10 discs bought from us after each 50 discs required. e.g. 50 discs @£33

60 discs @£33 + £5 = £38

Monitors - Mono

Philips

Philips BM7502 12" Hi-res CVBS Input, Audio Input, 20 MHz Band

Width, 2000 CHRS Display, Adjustable Viewing Angle, Green

Display £79.00

Philips BM7522 Amber Screen £95.00

Philips BM7542 Dedicated WD Phosphor Screen

Monitor £95.00

Philips BM7513 12" IBM compatible £120.00

All these monitors have a special £7.50 off the listed price

above - LIMITED PERIOD ONLY

Taxan

New Taxan KX117 12" Screen P31 £89.00

Taxan KX118 12" Screen P39 £99.00

Taxan KX119 12" PUL Amber Screen £99.00

All these monitors have a special £5 off the listed price

above - LIMITED PERIOD ONLY

Colour Monitors

Microvitec

Microvitec 1431 STD Res £201.35

Microvitec 1457 Med Res £255.00

Microvitec 1441 Hi-Res £391.00

Microvitec 2030 CS2- Std Res £425.00

Microvitec 1431AP £224.25

Microvitec 1451AP Med Res £293.25

All these monitors have a special £15.00 off the listed price

above - LIMITED PERIOD ONLY

Philips

New Philips CM8853 14" CVBX and RGB Med Res colour

monitor, IBM PC compatible. Fast Blankup to enable Superim-

posing. Stereo Audio Sound. Ear phone socket. 600 x 285 lines

vertical £259.00

(£10 off usual price)

Philips CM8852 14" Professional Med Res Colour .

700 dots x 285 lines £279.00

(£10 off usual price)

Philips CM8873 14" RGB High Res Colour monitor.

Res 850 x 480 £540.00

(£10 off usual price)

Taxan Super Vision 620

High Res. Monitor with several unique features, at a price you can

afford

Supervision 620

12" RGB High Res. monitor, IBM, BBC, Apple and most PC's. 635 x 312 lines. Positive or negative sync input. Text colours switchable to green, amber, white or blue or inverse white. Super high contrast tube. Optional swivel base with Clock/Calendar available Special introductory offer £289.00

(£10 off)

New Supervision 625

12" High resolution Colour Monitor £359.00

681 Dots x 312 Lines

(£10 off usual price)

Monitor to TV converter

Well built AV7300 colour tuner module. Push button control. 12 preset channels. Built in Aerial. Compact design. Composite video only £65.00

(£10 off usual price)

All prices inc. of VAT Carriage on Monitors £6 inc via Securicor

24 Hours Service.

All Drives are covered by our special 2 year guarantee. All 40/80

Drives have switch at the front of the drives.

Disc Drives

5.25" and 3.5" Drives

40 track single psu £P.O.A

40 track single £P.O.A

80 track single psu £135.00

80 track single £113.00

40/80 track dual vertical psu £219.00

40/80 track dual vertical £235.00

40/80 track dual plinth £265.00

3.5" single drive £85.00

3.5" Dual Drive £149.00

3.5" Single Drive psu £135.00

3.5" Dual Drive psu £199.00

5.25" & 3.5" Combo

40/80 track/3.5"psu £189.00inc

Winchester Drives

Large range of Winchester Drives available. Please enquire for

details.

Accessories

Product: OverView
Price: £98.90
Supplier: Acornsoft, 645 Newmarket
Road, Cambridge CB5 8PD.
Tel: 0223 214411

Looking OverView

THERE was a heavy thud on my doormat as my review copy of OverView arrived. It is an impressive package with two slipcases packed full of the View family goodies listed in Table I, but what does OverView amount to?

If you have a Master 128, OverView will add the rest of the View family to the already resident View and ViewSheet. The only dud in the whole package is ViewPlot, which really lets the side down badly.

In addition to ViewSpell, ViewStore and ViewIndex you get the Acornsoft manuals for View and ViewSheet to supplement the rather simplistic chapters in the Master Welcome Guide. A rom cartridge comes fitted with two 16k eproms ready to slip into your machine. One simply contains ViewStore, version 1.2, while 8k of the other holds version 1.1 of ViewSpell.

The remaining space in this rom contains comprehensive HELP messages for the main View family packages, three new star commands and the Keeper — but more of this later. An ADFS format

to switch between View, ViewSpell, ViewSheet and ViewStore without saving and loading files at each change of program.

This is achieved by the Keeper, which holds the individual files — called contexts — temporarily in ram. Suffixes to *KEEP determine whether you want to use discs — should all your ram be committed to other uses — and the directory in which the context files are stored.

If you are using ram, *KEEP OFF should be used to end the session and will save all those precious files on disc, under the context directory, before you switch off and lose everything.

If the files are not so precious you tell

ViewIndex programs
ViewPlot programs
Printer Driver Generator programs
ViewStore utility and example files
ViewSpell dictionary files


Table II: Software on Utilities disc

it to *KEEP QUIET and nothing is saved. The Keeper is fully compatible with the Turbo co-processor, but if this is active it is possible to create files that are too big to store as context files and a warning message appears.

I have to admit I have not yet found a real use for the Keeper. None of my applications for View family programs require me to have a wordprocessor, spellchecker, database and spreadsheet active — each with their own files — at the same time. I do not even use two applications together.

It is important to appreciate that OverView does not transfer data between programs, but merely stores the file while you work with another module. So, I was rather disappointed with the Keeper concept. The last three pages of the OverView Guide do contain a summary of the commands necessary to transfer data between applications, but these are not exclusive to OverView — with the exception of *READ.

OverView contains two new commands for ViewSheet: *READ and *RC. The former enables you to read a table of data from a text file into a spreadsheet. The text file could be created by View and the table entries separated by tabs. The *RC command will read the contents of one spreadsheet to another and

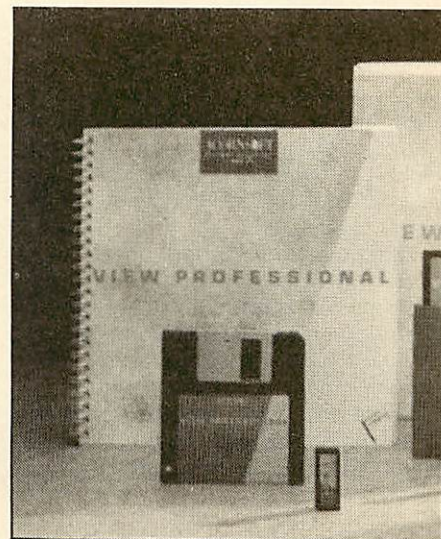

complements the PC (Print Contents) command already in ViewSheet.

The OverView cartridge also provides a wide-screen utility so that *WIDE ON will provide a screen display of 106 or 53 characters, but I must say that the characters in the 106-width display are difficult to read even on a high resolution monitor and almost impossible on a standard resolution colour model.

Is the OverView package good value? If you have yet to acquire any of the View family programs for your Master, OverView is excellent value for money. But I already had ViewSpell, ViewStore, ViewPlot and ViewIndex so OverView had nothing significant to offer me.

It would perhaps be better to be able to buy just the 8k of rom utilities unique to OverView, without all the other major View family applications, and at a greatly reduced price.

What about it Acorn?

Guides:

OverView
View
ViewSheet
ViewStore
ViewSpell
ViewIndex
ViewPlot
View family filing system
Printer driver generator

Reference cards:

ViewStore
ViewSpell

Function key cards:

ViewStore
ViewPlot

Software:

Rom cartridge
Program disc

Table I: The contents of the OverView package

5.25in disc contains the rest of the View family software and utilities shown in Table II.

After sorting through the eight manuals, which could overwhelm a newcomer, I found that the slimmest — a mere 25 pages — was the OverView Guide. Essentially OverView enables you

ViewSpell ADFS bug

Regular readers of *The Micro User* will remember the debate over the past year concerning the bug in ViewSpell version 1.0, which prevented ADFS users from creating a user dictionary. I am pleased to report that version 1.1 with OverView has had this problem solved. Furthermore, ViewSpell 1.1 is now compatible with the Watford DFS.

Compiled by Steve Turnbull

THIS month's selection covers a wide range of subjects, from an anagram solver, through a string sort routine to a program to find the date Easter falls on in a given year.

Machine code programmers are aided with a label highlighting routine for screen listings, but it would be nice if someone could supply a version that operates in any screen mode – and when printing – and the string sort routine would be better implemented using either the shellsort or quicksort algorithms.

Title: Label Highlighting

Language: 6502

Author: Iain Coulthard

When scanning through a machine code program listing, a particular label can be quite difficult to spot, so some way of highlighting them would be a great help.

When running, the short machine code routine listed below intercepts the write character vector and switches the text colour to red after encountering a full stop – start of label – and switched back to white after a space or Return is printed. It works in Modes 1, 2 and 5, but Mode 1 provides the clearest display.

Type in and save the program.

When you run it the machine code routine is saved and can be loaded with either:

*run hlight

or:

*hlight

The program also demonstrates by listing itself in Mode 1 so you can see the highlighting in action.

There is no check to see if the routine is already loaded, so running it twice will cause your micro to crash.

```

10 REM Label Highlight
20 REM by Iain Coulthard
30 PROCinit:PROCassem
40 PROCcli('S. Labels A00 "+STR$~P
%)
50 CALLcode
60 *key0'MODE6IMLISTIM
70 *FX138,0,128
80 END
90 DEF PROCinit
100 code=&A00:wrchv=&20E
110 oscli=&FFF7:osbyte=&FFF4
120 oswrch=&FFEE:ENDPROC
130 DEF PROCassem
140 FOR LX=0 TO 2 STEP 2
150 PX=code:COPT LX
160 .start
170 LDA wrchv:STA oldwrchv+1
180 LDA wrchv+1:STA oldwrchv+2
190 LDA #mywrchv MOD256:STA wrchv
200 LDA #mywrchv DIV256
210 STA wrchv+1:RTS
220 .mywrchv
230 PHP:PHA:TXA:PHA:TYA:PHA
240 LDA #218:LDX #0:LDY #&FF
250 JSR osbyte:TXA:BNE exit
260 TSX:LDA #103,X:LDX Loff
270 BEQ off:CMP #46:BNE exit
280 LDA #17:JSR oswrch:LDA #1
290 JSR oswrch:LDA #0:STA Loff
300 .exit PLA:TAY:PLA:TAX:PLA:PLP
310 .oldwrchv JMP &FFFF
320 .off CMP #13:BEQ skip
330 CMP #32:BNE exit
340 .skip LDA #17:JSR oswrch
350 LDA #7:JSR oswrch
360 STA Loff:JMP exit
370 .Loff NOP:J:NEXT:ENDPROC
380 DEF PROCcli($&700):LOCAL XX,YY
390 YY=7:CALL oscli:ENDPROC

```

✓ Get it right!

10 = 00	140 = AAB9 9	270 = F6F2 F
20 = 00	150 = 7CBB 7	280 = 9791 4
30 = 597F F	160 = 3208 1	290 = F22 7
40 = 2A23 F	170 = 1C19 0	300 = 2124 2
50 = 740E 9	180 = 67C5 0	310 = D64E 0
60 = AE79 7	190 = DE3A 0	320 = 7DAB 2
70 = 5DEC 2	200 = 8BE5 3	330 = B466 F
80 = FD2E 0	210 = 9A2F F	340 = B76C 4
90 = 4007 3	220 = 3AB1 4	350 = 7574 8
100 = 8752 7	230 = A5E9 A	360 = B739 8
110 = 37B9 B	240 = 5627 F	370 = 3178 0
120 = F8CE 5	250 = E1B8 6	380 = E297 0
130 = B623 0	260 = C6AD 8	390 = 7002 C

Send your routines – with full details of the language it is written in and the hardware/software requirements – on disc or tape to:

Steve Turnbull, Library, The Micro User, Adlington Park, Adlington, Macclesfield SK10 5NP.

Remember to enclose a stamped addressed envelope for the return of your media. Five blank discs will be sent to the authors of any routines published.

Title: Alpha Sort
Language: Basic
Author: Peter Cumberland

This program is called Alpha Sort, and that is exactly what it does. The routine is designed to operate inside another program where an array of strings need to be sorted into alphabetical order.

The algorithm used is an improved

bubble sort, where each array element is shifted into position, but once it is correctly positioned it is never checked again. While not the best technique available for sorting, it is quite satisfactory for most purposes.

```
10 REM String Sort
20 REM by Peter Cumberland
30 MODE7:VDU23;8202;0;0;0;
40 INPUT "How many items? "Items
50 DIM Item$(Items)
60 FOR I%=1 TO Items
70 PRINT "Enter item ";I%;
80 INPUT "Item$(I%):"NEXT
90 Swap=FALSE
100 FOR I%=1 TO Items-1
110 FOR J%=I% TO Items
120 IF Item$(I%)>Item$(J%) Temp$=Item$(I%):Item$(I%)=Item$(J%):Item$(J%)=Temp$:Swap=TRUE
```

```
130 NEXT:IF NOT Swap THEN I%=Items
140 NEXT:FOR I%=1 TO Items
150 PRINT Item$(I%):NEXT
```



10 = 00	60 = C09D C	110 = 287B 0
20 = 00	70 = F52B 6	120 = A59 E
30 = 8B0B B	80 = 1E31 4	130 = 103F 5
40 = F04B B	90 = C508 A	140 = 82A1 8
50 = 9CAB 8	100 = 1288 0	150 = 9C13 E

Title: Simple Terminal
Language: Basic
Author: Toby Simpson

Here's a quick terminal program which caters easily for both input and output. It switches between keyboard and RS423 input channels, routing the former to the RS423 output line and the latter to the screen.

The routine can be adapted easily for inclusion in another program, but it runs perfectly well on its own. You may need to adjust the input and output baud rates set in line 40.

```
10 REM Simple Terminal
20 REM by Toby Simpson
30 MODE7:ON ERROR PROCend:END
40 PROCos("FX7,4"):PROCos("FX8,4")
50 REPEAT
60 PROCos("FX2,2"):A%=INKEY(1)
70 IF A%>-1 PROCos("FX3,7"):VDUA%
80 PROCos("FX2,1"):A%=INKEY(1)
90 IF A%>-1 PROCos("FX3"):VDUA%
100 UNTIL FALSE
110 DEFPROCend:PROCos("FX2")
120 PROCos("FX3"):CLS:ENDPROC
130 DEFPROCos($8700):LOCALX%,Y%
140 Y%=7:CALL&FFF7:ENDPROC
```



10 = 00	80 = 55B1 3
20 = 00	90 = EDFC 9
30 = CBEO 0	100 = 226C D
40 = 181D 2	110 = 1234 2
50 = BFBA E	120 = 909B 6
60 = 2D4B B	130 = A38E 1
70 = CD02 E	140 = 50E0 8

Title: Easter Day
Language: Basic
Author: T.E.Shepherd

Certain religious festivals, like Easter, occur on different days and dates each year.

These movable feasts taxed the minds of many mediæval monks until they came up with special formulae

which could predict which day a particular one would fall on in a given year.

A common programming task is to use these mediæval algorithms in a computer program. This one predicts

which day Easter will fall for any year in the range 1985 to 2199.

The year number is used to generate two values which cross reference into a table that contains the correct date.

```
10 REM Easter Day
20 REM by T.E.Shepherd
30 MODE7:DIM ES(19,6)
40 FOR R%=1 TO 19:FOR C%=0 TO 6
50 READ ES(R%,C%):NEXT:NEXT
60 REPEAT REPEAT CLS
70 INPUT "Which year (1985 to 2199) ",Y%
80 UNTIL Y%>=1985 AND Y%<=2199
90 A%=Y%+6+INT(Y%/4)
100 SL%=A%-(INT(A%/7)*7)
110 PRINT "Sunday letter = ";SL%
120 C%=Y%+1
130 GN%=C%-(INT(C%/19)*19)
140 IF GN%=0 GN%=19
150 PRINT "Golden number = ";GN%
160 PRINT "Easter day is "ES(GN%,SL%)
170 PRINT "Another year?";
180 REPEAT AS=CHR$(GETAND&DF)
190 UNTIL INSTR("YN",AS)
200 UNTIL AS="N":PRINT AS:END
210 DATA Apr 16, Apr 15, Apr 21, Apr 2
220 DATA Apr 9, Apr 8, Apr 7, Apr 6, Apr 5, Apr 4, Apr 10
230 DATA Mar 26, Mar 25, Mar 24, Mar
```

```
30, Mar 29, Mar 28, Mar 27
240 DATA Apr 16, Apr 15, Apr 14, Apr 1
3, Apr 12, Apr 18, Apr 17
250 DATA Apr 2, Apr 1, Apr 7, Apr 6, Apr 5, Apr 4, Apr 3
260 DATA Apr 23, Apr 22, Apr 21, Apr 2
0, Apr 19, Apr 25, Apr 24
270 DATA Apr 9, Apr 15, Apr 14, Apr 13
, Apr 12, Apr 11, Apr 10
280 DATA Apr 2, Apr 1, Mar 31, Mar 30
, Mar 29, Apr 4, Apr 3
290 DATA Apr 23, Apr 22, Apr 21, Apr 2
0, Apr 19, Apr 18, Apr 17
300 DATA Apr 9, Apr 8, Apr 7, Apr 6, Apr
r 12, Apr 11, Apr 10
310 DATA Mar 26, Apr 1, Mar 31, Mar 30
, Mar 29, Mar 28, Mar 27
320 DATA Apr 16, Apr 15, Apr 14, Apr 2
0, Apr 19, Apr 18, Apr 17
330 DATA Apr 9, Apr 8, Apr 7, Apr 6, Apr
r 5, Apr 4, Apr 3
340 DATA Mar 26, Mar 25, Mar 24, Mar 2
3, Mar 29, Mar 28, Mar 27
350 DATA Apr 16, Apr 15, Apr 14, Apr 1
3, Apr 12, Apr 11, Apr 17
360 DATA Apr 2, Apr 1, Mar 31, Apr 6, Apr
5, Apr 4, Apr 3
```

```
370 DATA Apr 23, Apr 22, Apr 21, Apr 2
0, Apr 19, Apr 18, Apr 24
380 DATA Apr 9, Apr 8, Apr 14, Apr 13,
Apr 12, Apr 11, Apr 10
390 DATA Apr 2, Apr 1, Mar 31, Mar 30,
Mar 29, Mar 28, Apr 3
```



10 = 00	140 = E612 D	270 = D37B 2
20 = 00	150 = 5EC0 A	280 = 9911 6
30 = 8F7C C	160 = B56F 3	290 = 86A9 C
40 = 4537 5	170 = 3CD9 6	300 = B131 C
50 = 9348 0	180 = B57 D	310 = 3A88 E
60 = 5F1D 6	190 = 37C9 3	320 = 5419 1
70 = B8E4 0	200 = 9693 D	330 = C01A 6
80 = 4B93 6	210 = 4C25 1	340 = 308E 9
90 = 718B E	220 = 937D 4	350 = D005 7
100 = DCB9 0	230 = 47FC C	360 = F369 7
110 = 3CCB 0	240 = 890C 8	370 = E399 9
120 = 49E7 2	250 = A1BC 2	380 = D5ED 7
130 = 7E0D 4	260 = 98B9 1	390 = F4CB 1

**Master 128 Computer,
+ FREE Romboard 3 & Master to BBC B conversion fitted,
+ £5 off Master REPLAY.
Only £385 + VAT. Save over £50 !**

Upgrading from a BBC B to a Master ? With this special offer, we are fitting our Romboard 3 and Master to B conversion into every Master 128 that we sell. This will enable you to fit two extra ROMs inside the computer without losing any RAM space and be able to select between Master and BBC B mode - thus making the Master compatible with even more tape software than before.

And, of course, you'll have the assurance that Vine Micros can offer an extensive customer support service - after all, we have been designing and manufacturing computer accessories for nearly 5 years.

Please add carriage charge of £8 and then VAT. To order, send a cheque made payable to Vine Micros Ltd, or order over the telephone with Access. We keep Master 128's in stock ready for quick delivery.

Archimedes Computers available at very competitive prices

A305 base system.....£660	A310 base system.....£730
A305 mono system£705	A310 mono system£775
A305 colour system£850	A310 colour system.....£935

All Archimedes Computers come with mouse, manuals, welcome guide and disk.

Please add carriage charge of £8 and then VAT. To order, send a cheque made payable to Vine Micros Ltd, or order over the telephone with Access. Please telephone for availability.

For Tape to Disk Transfer the REPLAY system can't be beaten.. Guaranteed!

Ever wanted your tape programmes to load in seconds rather than minutes?.....

Fed up with having to go all the way back to the beginning of a game because you made one silly mistake with your last life?..... Would you like a screen dump of your high-scores?.....

Would you like a tape to disk transfer system that not only loads programs from disk in a few seconds, but also lets you save them at virtually any point you like, so that you can go back to the point just before your last life was used up?..... If you do, then read on....

Plug REPLAY into your computer, connect a few wires (no soldering, very easy to fit connections - as our customers say), and you'll have installed a 'Magical piece of equipment' (quote from A&B review).

It won't take you long to find out why REPLAY has established itself as THE BEST in tape to disk transfer... there's quite simply no competition. If you buy REPLAY and find that it won't transfer more programs than your present tape to disk program then we'll refund your money in full! And if you don't currently have such a program, then don't waste your money on anything else!

BBC B and B+ versions of REPLAY now cost £29.90 all inclusive. Please state your DFS type exactly.

Self contained REPLAY for Master computers now costs £35 all inclusive.

REPLAY to fit on our ROMboard '3' for the Master now costs £27 all inclusive.

Master REPLAY plus ROMboard '3' for Master 128 for only £39 all inclusive.

Master to B conversion kit (allows most BBC B tapes to run on the Master) £14.95 State Master REPLAY type. fitted

ROMboard '3' for the Master 128, £17.50 inc.

The first ROMboard ever to be produced for the Master computer, and by far the most popular. Its ease of installation and use makes it ideal for anyone who finds they need more ROM sockets in their Master. Takes 3 ROMs including the Inter-series of ROMs by Computer Concepts, and overlays the built-in software.

Write Protect Switch for Master 128, £8.95 inc.

Again, Vine Micros were the first with their device to write-protect either 2 or all 4 of the sideways RAM banks of the Master computer.

Printers, prices include VAT and carriage

Citizen 120D, 80 column 120cps, NLQ, parallel interface	£199.90
SBC TP180-9, 80 column 180cps, NLQ, parallel interface	£269.90
Citizen MSP15E, 136 column, 160cps, NLQ, parallel interface	£299.90
Epson LX800, 80 column, 120cps, NLQ, parallel interface	£309.90
Citizen MSP40, 80 column, 240cps, NLQ, parallel interface	£359.90
Leads for BBC B, B+, Master, Archimedes only	£9.20 inclusive each.

ROMboard '4' for the Master 128, £26.50 inc.

This ROMboard allows up to 4 extra ROMs to be fitted inside the computer, replacing either the cartridges or the sideways RAM. The board also includes a read/write protect switch. Ideal for those users who dislike cartridges but require extra ROM space.

MATRIX ROM only £26 all inclusive (was £41.40)

ADDCOMM ROM only £23 all inclusive (was £28)

Goldstar disks Packs of 10 x 5.25"	Boxed		Unboxed	
	Branded		Unbranded	
Goldstar Disks	1-9	10+	1-9	10-49 50+
S/sided D/density 48tpi	£6.50	£5.70	£5.50	.
D/sided D/density 48tpi	£7.00	£6.00	£6.10	.
D/sided Q/density 96tpi	£9.00	£8.00	£7.50	£5.50 £4.00

NB. Add 15% VAT plus 70p carriage per box.

Trade enquiries welcome.

Vine Micros Ltd - Computers and Accessories

Marshborough, Sandwich, Kent. CT13 0PG. Telephone 0304-812276/368968 ACCESS/VISA accepted

Title: Anagram
Language: Basic
Author: Ian Fell

The problem of generating and solving anagrams is one which tickles most computerised crossword addicts at one time or another. Having analysed various methods, the only reasonable technique to do the job involves the use of recursion.

The program given here is the outcome. Input any length of string and it will generate all the possible combinations of those characters.

Although the program will take any length of string, if it is over six characters the time taken to produce all the options is rather prohibitive – for a nine-character word it can take more than 20 hours to produce all variations.

Once all the set-ups have been done, PROCsort is called recursively

to generate all the possible combinations. The loop from line 170 to line 150 has to be used instead of a FOR ...NEXT otherwise the Too many FORs error will be generated.

If you are using Basic I line 160 will fail due to the known INSTR bug, detailed on page 281 of the User Guide. Unfortunately there's no easy solution to the problem in this case.

```

10 REM Anagram
20 REM by Ian Fell
30 MODE 7
40 CX=0:DX=0:LX=0:YX=0:ZX=0
50 QS="":SS="":TS=""
60 REPEAT CLS
70 INPUT "Please type in anagram",s$
80 LX=LEN(s$):DX=LX
90 VDU-7*(LX=0):UNTIL LX>0
100 PROCsort(q$,DX)
110 PRINT "Permutations = ";ZX
120 END
130 DEF PROCsort(q$,DX)
140 LOCAL CX:IF DX=0 PROCprint:ENDPROC
150 CX=CX+1:JS=CHR$(CX)
160 IF INSTR(q$,JS)=0 PROCsort(q$+JS,DX-1)
170 IF CX<>LX THEN 150
180 ENDPROC
190 DEF PROCprint
200 FOR X=1 TO LX:YX=ASC(MID$(q$,X,X))
210 VDU ASC(MID$(q$,X,X)):NEXT X:ZX=ZX+1
220 IF ZXMOD24=0 PRINT
230 PRINT:ENDPROC

```

Get it right!

10 = 0 0	90 = 9D8 1	170 = 7F7 4
20 = 0 0	100 = AD74 1	180 = ED0F A
30 = 1092 2	110 = 4C44 0	190 = B5DC C
40 = F021 3	120 = FD2E 9	200 = 41AF 5
50 = E1FC F	130 = 5785 2	210 = B237 D
60 = 7452 9	140 = 318E C	220 = DC91 7
70 = 3CB8 B	150 = 95AB 8	230 = D333 6
80 = 80A6 3	160 = A32D F	

LIGHTSPEED SOFTWARE

31A Broadweir, Bristol BS1. Telephone: (0272) 225604
24 Hour Answer Phone for all enquiries

BBC DISC

TITLE	OUR PRICE
Bonecruncher	10.00
Cholo	14.50
Code Name Droid	10.75
Code Name Droid (Compact)	12.50
Colossus Chess 4.0	12.95
Craze Rider	10.50
Double Phantom	17.50
Elite	12.95
Elite (Compact)	17.50
Elixir	12.25
Firetrack	12.50
Grand Prix	10.25
Grand Prix (Compact)	12.50
Graphic Adv Creator	24.00
Impact	9.95
Impossible Mission	10.50
Life of Repton	6.25
Mini Office 40/80	14.50
Mini Office 80T Master	17.50
Mini Office Master Com	18.75
Monopoly	12.50
Palace of Magic	10.80
Palace of Magic (Compact)	12.50
Paperboy	12.50
Phantom	10.50
Play It Again Sam	10.25
Play It Again Sam (Compact)	12.50

TITLE	OUR PRICE
Repton 3	10.50
Repton 3 (Compact)	12.75
Revs +4 Tracks	12.50
Revs +4 Tracks (Compact)	17.50
Scrabble	12.50
Sentinal	12.50
Speech	10.50
Spellbinder	12.25
Sphere of Destiny	10.50
Steve Davis Snooker	10.75
Strike Force harrier	10.75
Strykers Run	10.50
Superior Coll V1 Com	12.50
Superior Coll V2 Com	12.50
Superior Coll Vol 1	10.50
Superior Coll Vol 2	10.50
The Quill	19.50
Trivial Pursuits	17.50
War	12.50
Winter Olympics	10.50
Winter Olympiad '88	12.25
XOR	12.50
XOR Designer	12.50

BBC CASSETTE

TITLE	OUR PRICE	TITLE	OUR PRICE
Arkanoid	7.25	Paperboy	7.75
Bonecruncher	7.75	Phantom	6.25
Citadel	7.75	Phantom Combat	7.75
Code Name Droid	7.75	Play It Again Sam	7.75
Colossus Chess 4.0	7.75	Power Pack	7.75
Comp Hits 10 Vol 3	7.75	Repton 3	7.75
Computer Hits 4	7.75	Rev + 4 Tracks	10.50
Computer Hits 5	5.35	Round World 80 Screens	6.75
Craze Rider	7.75	Scrabble	10.50
Elite	10.95	Sentinal	7.75
Elixir	7.75	Speech	7.75
Firetrack	7.50	Spellbinder	7.75
Five Star Games 2	7.50	Starquake	7.75
Graphic Adventure Creator	16.50	Star Wars	7.55
Impact	7.75	Steve Davis Snooker	7.25
Konam's coin ops	7.50	Strike Force Harrier	7.25
Life of Repton	5.75	Strykers Run	7.75
Micropower Magic II	6.25	The Hunt	7.75
Mini Office II	12.50	The Quill	14.50
Monopoly	10.50	Trivial Pursuits	12.25
Palace of Magic	7.65	Village of Lost Souls	7.75
		WAR	7.25
		Winter Olympiad '88	7.75
		Word Games	7.75
		XOR	7.75

PLEASE NOTE CHANGE OF ADDRESS
AND TELEPHONE NUMBER

All prices are inclusive of VAT and delivery inside the UK. Please make cheques P.O.'s payable to 'LIGHTSPEED SOFTWARE'
Orders normally despatched within 24 hours, but allow 7 days. All titles subject to availability.

ARCHIMEDES

ROM/RAM PODULE

This podule accepts a variety of ROM or RAM chips and includes ROM and RAM filing system software.

Seven 32 pin sockets can accept any combination of ROMs (16K to 128K) or RAMs (8K to 128K)

Battery and controller chip. Trickle charged battery ensures RAM contents are retained whilst computer is off (optional).

The controller ROM provided contains ROM and RAM filing system software, is fast, and totally Arthur compatible.

Links for battery backup or normal supply

Special controller circuitry automatically detects the type and size of chip plugged into each socket—eliminating 32 links

Edge connector plugs into podule back-plane of 300 or 400 series Archimedes

The board accepts software such as the Archimedes versions of Inter-Word, Inter-Chart and Inter-Sheet and will accept the forthcoming document processor and drawing programs. It is compatible and fully obeys all Acorn podule standards. It requires the back-plane to be installed—available from us and Acorn stockists.

£49.00 + VAT (£56.35) standard
£59.00 + VAT (£67.85) with battery
and controller chip



Computer Concepts Ltd

Gaddesden Place
Hemel Hempstead
Herts HP2 6EX.

Telephone 0442 63933

ACCESS & BARCLAYCARD ACCEPTED

Q How can I copy files from one disc to another using one disc drive?

A This is not covered very well in the manual and what you need to do is use the *COPY command – but a little differently from the DFS version on the old BBC Micro. The full path name of the file should be specified as well as a drive number.

A drive number can be given by a colon followed by a number and a full stop. Also the P for prompt option should be specified. Type:

*HELP COPY

for a list of all options available.

So, to copy a file called FRED that is in a directory MAN over to another disc use:

*COPY :0.\$\$.MAN.FRED :0.\$\$.MAN.FRED P

You may get a No room message indicating that there is not enough free memory to do the copy. To remedy this type QUIT and you will enter the No language, operating system mode. The prompt will be a star so use the same command, but there is no need to type the star yourself.

Another message you might get is Not found. This is can happen if you have not got a directory called MAN on your destination disc so create one using:

*CDIR MAN


When you are using wildcard characters in a filename to copy multiple files, you are best quitting from Basic and using the Q for quick option. This will use as much memory as the machine can grab and so minimise the amount of disc swapping. However, you will still have to swap the discs for each file copied so this only saves disc swaps if the file is long.

Q How can I run the Ram Basic on the Welcome disc?

A There are currently two versions of Welcome disc depending on which operating system you have. If you have the 0.2 version of Arthur you should just be able to type:

*\$.Modules.RAM_BASIC

If you try that on the 0.3 version of

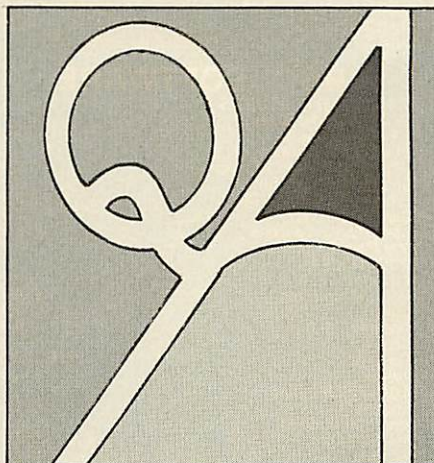

We are receiving a large number of questions about the Acorn Archimedes. Some of them are answered here, and we will be answering more over the next few months.

So, if you have any questions about the new super micro from Acorn don't hesitate to send them to: Archimedes Questions, The Micro User, Europa House, Adlington Park, Adlington, Macclesfield SK10 5NP.

Arthur it will appear to run, but every time you try to execute a PRINT statement from Basic you will get the rather cryptic error message: SWI &46 not known.

To prevent this type in:

*RMLOAD \$.Modules.VduExtend

either before or after entering Basic.

The Ram Basic is faster than the rom-based version and this is especially noticeable when the program spends a lot of time in the interpreter. So when it's executing a lot of complex-looking statements this can improve the speed by about one and a half to two times.

Q I have the newer 0.3 operating system and whenever I power up I get into the desktop. How can I stop this happening?

A If you type *STATUS you will get a list of the currently configured options. Against Language you will see the number 3 and on a 0.2 operating system this means start up in Basic. However, in the 0.3 version it means start up in the desktop. To start up in

Basic you need to enter:

*CONFIGURE Language 4

followed by Control+Break. Using the number 2 or anything lower starts you off in the No language mode.

Q Recently a green region has appeared at the top of the desktop display. This does not appear to affect the screen when it has a black background – it only happens with a coloured background.

A I strongly suspect that you have placed one or two external loudspeakers on top of the monitor to try to improve the sound quality from your Archimedes. Magnetic fields and computers do not mix and there is a danger of damaging your discs with fields from loudspeakers. In your case, however, the speaker has magnetised the screen and caused this colour distortion.

Even with these speakers removed, the patterning may still persist – it could take a few days to disappear. If it does not disappear itself there is a solution: Your monitor needs de-gaussing.

This can be done with a de-gaussing coil, but might involve dismantling the monitor. Any good TV repair shop should be able to do this for you.

Q Some of the Basic programs on the Welcome disc have their first line as:

10 REM > name

where name is the filename of the program on the disc. Is there a good reason for this?

A When you use the Basic editor and press f3 to save the file the name contained after the > in the first REM will automatically appear in the box. Then all you have to do is to press Return and it will be saved under that name. Or from Basic itself, just typing:

SAVE

and Return saves the program under the REMmed filename.



M & M COMPUTERS

Bon-Accord House

41 Albert Street, Aberdeen AB1 1XU

Tel: 0224-571735

Acorn
The choice of experience.

COMPACT SOFTWARE

GAMES/ADVENTURES	R.R.P.
BBC PUBLICATIONS	
White Knight	£14.95
CDS	
Birdie Barrage Golf	£12.95
Steve Davis Snooker	£12.95
MICRO POWER	
Dr Who and the Mines of Terror	£9.95
Micro Power Magic	£9.95
SQUIRREL	
Games Disc	£14.95
SUPERIOR	
Revs/4 Tracks	£19.95
Elite	£19.95
Repton III	£14.95
Galaforce	£14.95
Karate Combat	£14.95
Repton 2	£14.95
Strykers Run	£14.95
Speech	£14.95
Citadel	£14.95
Acornsoft Hits Volume I	£14.95
Acornsoft Hits Volume II	£14.95
Codename Droid	£14.95
Around the world in 40 screens disc	£9.95
Superior Collection 1	£14.95
Superior Collection 2	£19.95
Grand Prix Construction Kit	£14.95
Crazy Rider Disc	£14.95
Palace of Magic disc	£14.95
The Life of Repton Disc	£9.95
Bonecruncher Disc	£14.95
Elixir Disc	£14.95
Spellbinder Disc	£14.95
TYNESOFT	
Big K.O.	£12.95
Goal	£11.95
Jet Set Willy II	£12.95
Commonwealth Games	£11.95
Mousetrap	£11.95
US Drag Racing	£11.95
Vindaloo	£11.95
Winter Olympics	£11.95
EDUCATIONAL	
A.S.K.	£22.95
Best Four Maths	£22.95
Best Four Language	£22.95
BBC PUBLICATIONS	
Figures of Fun	£18.95

ELECTRON SOFTWARE

GAMES/ADVENTURES	
MICRO POWER	
Ghouls	S/O £7.95
Swag	S/O £6.95
Felix Meets Evil Waevils	S/O £6.95
Killer Gorilla	S/O £7.95
Felix in the Factory	S/O £7.95
Moonraider	S/O £7.95
Galactic Commander	S/O £7.95
Bumble Bee	S/O £6.95
Chess	S/O £7.95
Cybertron Mission	S/O £7.95
Danger UXB	S/O £7.95
Electron Invaders	S/O £7.95
Escape Moonbase Alpha	S/O £7.95
Felix & Fruit Monsters	S/O £7.95
Gauntlet	S/O £6.95
SUPERIOR SOFTWARE	
Elite	£12.95
Acornsoft Hits I	£9.95
Codename Droid Disc	£11.95
Codename Droid Cassette	£11.95
Acornsoft Hits II	£9.95
Ravenskull	£9.95
Repton III	£9.95
Thrust BBC/Electron	£7.95
Karate Combat BBC/Electron	£8.95
Citadel	£9.95
Repton II	£9.95
Repton II Disc	£11.95
Galaforce	£9.95
Galaforce Disc	£11.95
Codename Droid Disc	£11.95
Codename Droid Cass	£9.95
Crazy Rider Disc	£11.95
Crazy Rider Cass	£9.95
Palace of Magic Disc	£11.95
Palace of Magic Ele/Cass	£9.95
Play it again Sam BBC/Cass	£9.95
Play it again Sam Ele/Cass	£11.95
The Life of Repton Disc	£6.95
The Life of Repton Cass	£6.95
Bonecruncher Disc	£11.95
Bonecruncher Cass	£9.95
Elixir Disc	£11.95
Spellbinder Disc	£11.95
TYNESOFT	
Winter Olympics Disc	£12.95
Ian Botham Cricket BBC/Ele	£7.95
Jet Set Willy II BBC/Ele	£7.95
Future Shock BBC/Ele	£7.95

Goal BBC/Ele	£7.95
Winter Olympics BBC/Ele	£6.95
U.S. GOLD	
Impossible Mission BBC/Ele	£9.95
Questprobe	£7.95

BBC SOFTWARE

GAMES/ADVENTURES	
Dr Who and the Mines of Terror Master B+	£9.95
Dr Who and the Mines of Terror (16K Rom + Cassette)	£8.95
Dr Who and the Mines of Terror (16K Rom + Disc)	£9.95
Castle Quest disc	£14.95
Castle Quest Cassette	£12.95
Star Fleet Encounter	£9.95
ACORNISOFT	
4-Tracks	£9.95
Magic Mushrooms	£12.95
Boxer	£9.95
Bouncer	£9.95
Snooker	£9.95
Terrapod	S/O £9.95
Aviator	£14.95
ACORNISOFT Disc	
Snooker	£11.50
Magic Mushrooms	£14.95
4-Tracks Disc	£12.65
Aviator	£17.65
ARCANA	
View Professional	£113.95
Master Overview	£98.90
Powerplay Disc	£14.95
AUDIOGENIC	
Thunder Struck BBC/Ele	£7.95
Thunder Struck Disc	£11.95
Power pack	£9.95
The Last of Free BBC/Ele	£7.95
BBC PUBLICATIONS	
White Knight MK12 Disc	£18.95
White Knight MK12	£9.95
Able to transfer to disc	
Maths with a Story I Disc	£10.95
Battlefields (Cassette)	£9.95
Picture Craft (Disc)	£17.34
Modern Master	£12.95
SUPERIOR	
Around the world in 40 screens disc	£7.95
Acornsoft Hits I	£9.95
Acornsoft Hits I Disc	£11.95
Acornsoft Hits II	£11.95
Acornsoft Hits II Disc	£11.95
Elite Disc	£14.95
Revs/4 Tracks	£12.95
Revs/4 Tracks	£14.95
Elite	£12.95
Ravenskull	£9.95
Ravenskull Disc	£11.95
Repton III	£9.95
Repton III Disc	£11.95
Strykers Run	£9.95
Strykers Run disc	£11.95
Thrust Disc	£11.95
Thrust BBC/Electron	£7.95
Superior Collection Vol 1	£11.95
Superior Collection Vol 2	£11.95
Grand Prix Construction Kit	£11.95
Karate Combat Disc	£11.95
Karate Combat BBC/Electron	£8.95
Citadel	£9.95
Citadel Disc	£11.95
Repton II	£9.95
Repton II Disc	£11.95
Galaforce	£9.95
Galaforce Disc	£11.95
Codename Droid Disc	£11.95
Codename Droid Cass	£9.95
Crazy Rider Disc	£11.95
Crazy Rider Cass	£9.95
Palace of Magic Disc	£11.95
Palace of Magic Cass	£9.95
Play it again Sam BBC/Disc	£11.95
Play it again Sam BBC/Cass	£9.95
The Life of Repton Disc	£7.95
The Life of Repton Cass	£6.95
Bonecruncher Disc	£11.95
Bonecruncher Cass	£9.95
Elixir Disc	£11.95
Spellbinder Disc	£11.95
TYNESOFT	
Winter Olympics Disc	£12.95
Ian Botham Cricket Disc	£12.95
Jet Set Willy II Disc	£12.95

Jet Set Willy II BBC/Elec	£7.95
Ian Botham Cricket BBC/Ele	£7.95
Jet Set Willy BBC/Ele	£7.95
Winter Olympics BBC/Ele	£6.95
U.S. GOLD	
Impossible Mission Disc	£14.95
Impossible Mission	£9.95
Rebel Planet	£9.95
Questprobe	£7.95
Bounty Bob	£9.95
GENERAL	
Yes Prime Minister Disc	£19.95
Yes Prime Minister Cass	£14.95
BEAU JOLLY	
Five Star Games 'B'	£9.95
Computer Hits III	£9.95
Computer Hits 2 Disc	£14.95
Computer Hits 2	£9.95
Computer Hits 10 games	£9.95
CDS	
Brian Clough's Football Fortunes	£14.95
Brian Clough's Football Fortunes	£17.95
Colossus 4 Chess BBC/Ele	£9.95
Colossus 4 Chess Disc	£14.95
DESIGN PEOPLE SOFTWARE	
Tanks Disc	£12.95
Sink the Bismark Disc	£10.99
DOCTOR SOFT	
Double Phantom Disc	£19.95
Phantom Combat Disc	£12.95
Phantom Combat	£9.95
DOMARK	
Young Players Full Edition	
Trivial Pursuit Disc	£19.95
Young Players Question Pack	
(Trivial Pursuit) Cass	£7.95
Trivial Pursuit Cass	£14.95
ELITE	
Commando	£9.95
Air Wolf	£9.95
Air Wolf Disc	£14.95
FIREBIRD	
The Sentinel	£9.95
The Sentinel Disc	£14.95
GREMLIN	
Footballer of the Year	£9.95
Footballer of the Year Disc	£14.95
IMAGINE	
Yie Ar Kung Fu	£8.95
Yie Ar Kung Fu Disc	£12.95
LEISURE GENIUS	
Monopoly Disc	£14.95
Scrabble	£12.95
Scrabble Disc	£14.95
MACSEN	
Blockbusters BBC/Ele	£7.95
MARTECH	
W.A.R.	£8.95
W.A.R. Disc	£14.95
MELBOURNE HOUSE	
Lord of the Rings	£15.95
Way of the Exploding Fist	£9.95
Way of the Exploding Fist Disc	£14.95
MIRROSOFT	
Strike Force Harrier	£9.95
Strike Force Harrier Disc	£12.95
Hi-Bouncer	S/O £6.95

ARCHIMEDES

Zarch 3.5" Disc	£19.95
Minotaur 3.5" Disc	£14.95
Artisan 3.5" (By Clares)	£39.95
Tool Kit Module (By Clares)	£39.95
Image Writer (By Clares)	£29.95
Alphabase (By Clares)	£49.95

H S SOFTWARE

READ-RIGHT AWAY	
Reading Pack 1, Age 5-8 years	
For the BBC Model B Disc	£11.95
ADVENTUROUS ENGLISH	
English Grammar & Language Skills	
Age 7-11 years Disc	£7.95
CROSSWORDS	
Range 8 years to adults	
For the BBC/Electron Disc	£7.95
ENTERTAINING ENGLISH	
English Language Skills	
Age 7-11 years for the BBC 'B' Disc	£11.95
Read-Right Away Packs 1 to 4, Age 7-8 years	
for the BBC Model B/Master	£19.95

To: M&M COMPUTERS, Bon-Accord House, 41 Albert Street Aberdeen AB1 1XU

TMU Please send me

- ☐ I enclose a cheque for £..... payable to M&M COMPUTERS
- ☐ Please debit my Access/Visa Account



No. _____ Signed _____

Name _____ Address _____

Machine type _____ Tel No. _____

POSTAGE & PACKING ON SOFTWARE

All prices include VAT at 15%
For Software add £1 for outside Scotland,
and 50p within Scotland, for orders over 6
games post & packing is FREE
E.O.+E.



Z88 File archiving

WITH the BBC Micro you get used to being able to store files, more or less permanently, on disc. Cambridge Computers' Z88 keeps files in ram memory, which means there may always be a worry that they could become corrupted and so lost, perhaps when you make a mistake and the machine crashes, or when you take too long to change the batteries.

Ironically, the more ram packs you have, and so more data to lose, the less time you get to change the batteries.

This utility takes all of your files on the Z88 and transfers them to an archive file stored on disc using your BBC Micro. In the event of a problem the routine can be used later to reload the files on to the Z88.

It runs on the BBC Micro, using either the DFS or ADFS filing systems, and links up to the Import/Export utility on the Z88 and transfers files using a serial lead. The one described on page 132 of the January 1988 edition of *The Micro User* is suitable if, in addition, pins 8 and 9 are connected together at the Z88 end. This connection is needed because the Z88 expects a voltage on pin 8 before it will receive data, and pin 9 provides +5 volts.

The utility takes the stream of files sent by the Z88 and stores them as a single one in a form that can be directly loaded back. It reports the full file description of each as they are received and sent. Files are restored with the same original name.

Because there are likely to be quite a number of files, and so a lot of data to transfer, the coding for the actual transfer has been written in 6502 machine code for maximum speed.

Type in the Archive program, ensure it's correct using Get it Right!, and save it before trying to run it.

First on the Z88 you need to select the control panel (☐S) and in the top right hand corner to set the following:

Transmit baud rate	9600
Receive baud rate	9600
Parity	None
Xon/Xoff	No

Next, enter the Z88 Import/Export utility – ☐ X – and run the Archive program on

John Allen shows how to prevent file loss

your BBC Micro. To archive all Z88 files you should enter the following on the Z88:

```
S
:*//*
```

Press option one on the BBC Micro and enter a filename. Both the BBC Micro and the Z88 will then echo the Z88 filenames as they are being transferred.

To restore the files to the Z88, first ensure that there is enough room to accept the new data – if you are loading an entire memory full then you must wipe out all the current contents of the Z88. Run the Import/Export and Archive programs but this time, on the Z88, type:

```
B
```

Select option two on the BBC Micro and enter the archived data filename, then both machines will show the Z88 filenames as they are transferred across.

File selection

Trying to transfer more Z88 files than there is space for on your disc results in an error. There are a number of ways of avoiding this. If you have a Master and a double-sided drive the ADFS filing system allows up to 640k of data storage – which should be enough for most situations.

The problems arise with DFS machines – there are 100k on a 40 track disc and 200k on 80 track. If your Z88 files take up more space than that you will need to specify the files to transfer from the Z88 to stay within these size limits.

For example, if you have the internal memory of the Z88 – :ram.0 – plus a ram card in slot one, you can transfer the files from the two separately by first entering :ram.0//* at the filename prompt on the Z88 and then :ram.1//*,

creating two files which can be on different discs.

A full description of the wildcards which can be used in Z88 filenames is on page 195 of the Z88 manual, from which you will see that other possibilities include sending specific directories or only files with certain extensions.

If you want to send individual files one by one from the Z88, modify the Archive program by removing lines 960 and 980 to 1040 and adding:

```
960 CMP #90
980 RTS
```

End the succession of files by executing the End batch command on the Z88.

● **Next month** we present a handy utility which allows the Z88 to take control of a parallel printer attached to your BBC Micro.

```
10 REM Z88 Archive Program
20 REM by John Allen
30 REM (C) The Micro User 1988
40 REM
50 *FX15,0
60 *FX229,1
70 DIM oscbuff% 100
80 *FX3,6
90 PROCassemble
100 *FX3,0
110 MODE7
120 blue$=CHR$(132)+CHR$(157)
130 yellow$=blue$+CHR$(141)+CHR$(131)
140 PRINTTAB(0,2)blue$
150 PRINTTAB(0,3)yellow$;"The Micro User Z88/BBC archiving"
160 PRINTTAB(0,4)yellow$;"The Micro User Z88/BBC archiving"
170 PRINTTAB(0,5)blue$
180 PRINTTAB(1,8)CHR$(134);"1) Archive Z88 files to BBC disc"
190 PRINTTAB(1,9)CHR$(134);"2) Restore archived files to Z88"
200 PRINTTAB(1,12)"Enter choice:";CHR$(134);
210 REPEAT action$=GET$:UNTIL INSTR("12*",action$)<>0
220 PRINT action$;
230 IF action$="1" THEN PROCreceive:PRINT CHR$(131);"Transfer completed.";END
240 IF action$="2" THEN PROCsend:PRINT CHR$(131);"Files restored.";END
```




◀ From Page 47

```

250 REM
260 REM a "*" command
270 VDU31,0,15
280 INPUT "*"command$
290 ON ERROR REPORT:PRINT:GOTO 310
300 PROCoscli(command$)
310 ON ERROR OFF
320 PRINT" Press any key"
330 action$=GET$
340 IF action$="*" THEN PRINT:GOTO 280
ELSE GOTO 110
350 REM
360 DEF PROCoscli($oscbuff%)
370 X%=oscbuff%:Y%=oscbuff% DIV 256
380 CALL &FFF7
390 ENDPROC
400 REM
410 REM receive files from 288
420 DEF PROCreceive
430 PRINTTAB(1,15)"Archive filename:";
CHR$(134);
440 INPUT"file$
450 ON ERROR GOTO 580
460 handle%=OPENOUT(file$)
470 ON ERROR OFF
480 PRINTTAB(0,17)CHR$(131);"Receiving
files from the 288 ....."
490 ?&80=handle%
500 *FX7,7
510 *FX2,1

```

This is one of hundreds of
programs now available
FREE for downloading on

MicroLink

```

520 CALL receipt
530 CLOSE#handle%
540 *FX2,0
550 *FX229,0
560 ENDPROC
570 REM
580 REPORT
590 PRINT" Press any key":any%=GET:R
UN
600 REM
610 REM send files to 288
620 DEF PROCsend
630 PRINTTAB(1,15)"Archive filename:";
CHR$(134);
640 INPUT"file$
650 ON ERROR GOTO 580
660 handle%=OPENIN(file$)
670 IF handle%=0 PRINT "file does not
exist";:GOTO 590
680 ON ERROR OFF
690 PRINTTAB(0,17)CHR$(131); "Sending

```

```

files in ";file$;" ....."
700 ?&80=handle%
710 *FX8,7
720 *FX3,7
730 CALL sending
740 CLOSE#handle%
750 *FX3,0
760 *FX229,0
770 ENDPROC
780 REM
790 DEF PROCassemble
800 DIM code% 250
810 osrdch=&FFE0:oswrch=&FFEE:osbyte=&
FFF4:osnewl=&FFE7:osbput=&FFD4:osbget=&F
FD7
820 FOR pass=0 TO 2 STEP 2
830 P%=code%
840 [
850 OPT pass
860 .receipt
870 JSR osrdch
880 .back
890 LDY &80:JSR osbput
900 CMP #27
910 BNE receipt
920 JSR osrdch
930 JSR osbput
940 CMP #78
950 BEQ filename
960 CMP #69
970 BNE receipt
980 LDA #129:LDX #50:LDY #0:JSR osbyte
990 CPY #&FF
1000 BNE continue
1010 RTS
1020 .continue
1030 TXA
1040 JMP back
1050 .filename
1060 JSR osrdch
1070 JSR osbput
1080 CMP #27
1090 BEQ endfn
1100 JSR oswrch
1110 JMP filename
1120 .endfn
1130 JSR osnewl
1140 JMP receipt
1150 .sending
1160 LDY &80
1170 CLC
1180 JSR osbget
1190 BCS return
1200 JSR oswrch
1210 CMP #27
1220 BNE sending
1230 JSR osbget
1240 JSR oswrch
1250 CMP #78
1260 BNE sending
1270 LDA #3:LDX #5:JSR osbyte
1280 .printname
1290 LDY &80:JSR osbget

```

```

1300 CMP #27
1310 BEQ endname
1320 JSR oswrch
1330 JMP printname
1340 .endname
1350 LDA #3:LDX #4:JSR osbyte
1360 JSR osnewl
1370 LDA #3:LDX #7:JSR osbyte
1380 LDA #27:JSR oswrch
1390 JMP sending
1400 .return
1410 LDA #27:JSR oswrch
1420 LDA #90:JSR oswrch
1430 RTS
1440 J
1450 NEXT
1460 ENDPROC

```

**✓ Get it
right!**

10 =	00	500 =	DA15 C	990 =	F36C 9
20 =	00	510 =	5123 4	1000 =	DF6 7
30 =	00	520 =	4BC7 A	1010 =	9843 4
40 =	00	530 =	D31E 9	1020 =	2EE C
50 =	6C86 6	540 =	4102 1	1030 =	5DFD 1
60 =	5C2A 9	550 =	4C0B A	1040 =	B33F 0
70 =	3529 4	560 =	ED0F 2	1050 =	39F8 3
80 =	16F4 3	570 =	02	1060 =	DFA2 3
90 =	126A A	580 =	8FD9 1	1070 =	21CE 3
100 =	7632 A	590 =	6B69 A	1080 =	F994 A
110 =	8AFC D	600 =	0A	1090 =	EA62 6
120 =	859F A	610 =	0A	1100 =	9224 B
130 =	DC9C 4	620 =	488C 7	1110 =	354 7
140 =	A8A3 A	630 =	9871 C	1120 =	1FE7 2
150 =	4A2C 5	640 =	DE71 1	1130 =	3334 C
160 =	8D89 4	650 =	A632 A	1140 =	1234 F
170 =	B1E7 2	660 =	91C0 E	1150 =	D14A 9
180 =	E803 2	670 =	1FDF E	1160 =	E73F 9
190 =	F9CE D	680 =	F4C9 F	1170 =	74FB 6
200 =	1456 9	690 =	D180 F	1180 =	E44E 3
210 =	13CA 4	700 =	3BD 4	1190 =	1F92 0
220 =	E02E 5	710 =	F624 0	1200 =	9224 5
230 =	5F3F 7	720 =	605 1	1210 =	F994 4
240 =	791 3	730 =	A646 F	1220 =	C8C6 F
250 =	03	740 =	D31E B	1230 =	E44E 7
260 =	03	750 =	7632 6	1240 =	9224 E
270 =	4E5B 3	760 =	4C0B 2	1250 =	F78E F
280 =	9DB0 F	770 =	ED0F 3	1260 =	C8C6 E
290 =	8D3A 5	780 =	03	1270 =	91DB 1
300 =	F7FD 9	790 =	98A5 1	1280 =	51C3 5
310 =	F4C9 E	800 =	66B0 9	1290 =	ACA6 8
320 =	6014 4	810 =	10B E	1300 =	F994 4
330 =	ECE1 1	820 =	B43B D	1310 =	5B1A 0
340 =	753 6	830 =	7B E	1320 =	9224 B
350 =	06	840 =	EB9E 1	1330 =	6ADA 4
360 =	45F2 A	850 =	46D4 B	1340 =	7603 1
370 =	8128 E	860 =	3CCB F	1350 =	92AE 8
380 =	17A4 7	870 =	DFA2 9	1360 =	3334 9
390 =	ED0F 8	880 =	5C49 A	1370 =	9731 D
400 =	08	890 =	6926 3	1380 =	E750 5
410 =	08	900 =	F994 C	1390 =	FFB5 C
420 =	9E50 3	910 =	2547 C	1400 =	F006 F
430 =	9871 9	920 =	DFA2 D	1410 =	E750 1
440 =	DE71 A	930 =	21CE 2	1420 =	2BE4 F
450 =	A632 F	940 =	F78E 0	1430 =	9843 B
460 =	EAA8 5	950 =	D537 2	1440 =	8B58 1
470 =	F4C9 9	960 =	D49E C	1450 =	2C83 2
480 =	AB8 8	970 =	2547 3	1460 =	ED0F 4
490 =	3BD 5	980 =	B031 A		

COLOURJET 132

HIGH PERFORMANCE COLOUR INK JET PRINTER

(compatible with IBM pc, BBC micro, Nimbus etc.)

- ★ PRINTS ALL 64 SCREEN COLOURS FROM CGA AND EGA *
- ★ EMULATES OTHER PRINTERS (A1210, PJ1080A and QUADJET)
- ★ OVERHEAD TRANSPARENCY PRINTING
- ★ 80 + 132 COLUMN OPERATION, A4 WIDTH
- ★ UP TO 1280 DOTS/LINE ADDRESSABLE
- ★ FULL VIDEOTEX CAPABILITY
- ★ OPTIONAL BUFFERED RS232 (INTERNAL)
- ★ HIGHLY VERSATILE

ULTRA
LOW
NOISE

LIST PRICE
£569 + VAT

* using optional Integrex software.



EDUCATIONAL DISCOUNTS AVAILABLE

INTEGREX LTD CHURCH GRESLEY, BURTON ON TRENT,
STAFFS DE11 9PT
Tel (0283) 215432
Telex 341727 INTEG X

→ circle 49 on enquiry card ←



Basic in the balance

ONE of the first things I wondered when I started looking at Basic on the Z88 was whether any sort of animation was possible. I soon discovered that, unfortunately, the screen refresh time is far too slow for any fast arcade games, but I thought some animation should be possible — provided the movement is at a steady pace.

I looked back in the archives of *The Micro User* and found an educational game — Balance — in the February 1984 issue which was an ideal candidate for easy conversion to test my theory.

I made all the obvious changes to accommodate the screen size, tested the program on my BBC Micro and trans-

Peter Davidson's game

adds up to portable

maths fun on the Z88

ferred it to the Z88.

The only problem was VDU31 — the equivalent of TAB — did not position the cursor, so some of the printing was in the wrong place. I replaced them with TAB and the program worked.

So here is Balance, a program to test your powers of mental addition.

Key it into your BBC Micro and transfer it to the Z88 as described in last month's issue, or key it directly into the Z88. I

recommend the former as it allows you to use the Get it Right! checksums and built-in Basic editor on the BBC Micro.

When you run the program the sum appears on one pan of the scales and the answer you enter on the other.

The pans balance when the answer is correct, otherwise they tilt. It's not always easy, but it is fun to play.

This educational game will also work on all versions of the BBC Micro if the following line is added:

```
1 MODE0:COLOUR 0:COLOUR129
:VDU28,0,18,79,11
```


```
10 REM Z88 Balance
20 REM (c) The Micro User
30 REM By Pete Davidson
40 CLS
50 PROCINIT
60 GOES=0:REPEAT:GOES=GOES+1
70 PROCSELECT
80 PROCCENTRE
90 PROCINPUT
100 UNTILGOES=NUMQUES
110 PROCRESULT
120 IFLEFT$(REPLY$,1)="Y" ORLEFT$(REPL
Y$,1)="y" THENRUN ELSE CLS:END
130 DEFPROCINIT
140 PRINTSPC(20)"NUMBER BALANCE"
150 INPUT"How many questions do you w
ant? "NUMQUES
160 IFNUMQUES<1 THENVDU7:GOTO150
170 INPUT"What is the highest number
in any question to be (2 TO 99)? "HIGH
180 IFHIGH<2 OR HIGH>99 THENVDU7:GOTO
170
190 INPUT"What is your name? "NAMES
200 SCORE=0
210 ENDPROC
220 DEFPROCSELECT
230 NUM1=RND(HIGH)
240 NUM2=RND(HIGH)
250 DISPLAYS=RIGHT$( " "+STR$(NUM1),2)+
"+LEFT$(STR$(NUM2), " ",2)
260 ANS=NUM1+NUM2
270 ENDPROC
280 DEFPROC PAN(X,Y,DISPLAYS):X=X+1
290 IFY>=0PRINTTAB(X,Y+1) "
300 PRINTTAB(X,Y+2) " "+DISPLAYS+" "
310 PRINTTAB(X,Y+3);:VDU92,95,95,95,95
,95,47
320 PRINTTAB(X,Y+4) " ";
330 ENDPROC
340 DEFPROC CENTRE
350 CLS
360 PROC PAN(0,1,DISPLAYS)
370 PROC PAN(13,1, " ")
380 ENDPROC
390 DEFPROC INPUT
400 VDU7:PRINTTAB(35,3)"What is the an
swer? ";
410 REPLY$="":ANS$=STR$(ANS):FORI=1TOL
EN(ANS$)
420 A=GET:IFA<>13AND(A<48 OR A>57) THEN
420 ELSE AS=CHR$(A):PRINTAS;:REPLY$=REP
LY$+A$:NEXT:REPLY=VAL(REPLY$)
430 REPLY$=LEFT$( " "+REPLY$+" ",5)
440 IFANS=REPLY VDU7:PROCCORRECT
450 IFANS>REPLY VDU7:PROCSMALL
460 IFANS<REPLY VDU7:PROCBIG
470 IFGET<>32 THEN470
480 ENDPROC
490 DEFPROC BIG
500 PRINTTAB(35,1)"TOO BIG"
510 PROC MVE(-1)
520 PRINTTAB(35,3)"THE CORRECT ANSWER
IS "DISPLAYS;:ANS$;:PRINTTAB(35,5)"PR
ESS SPACE";
530 ENDPROC
540 DEFPROC SMALL
550 PRINTTAB(35,1)"TOO SMALL"SPC35
560 PROC MVE(1)
570 PRINTTAB(35,3)"THE CORRECT ANSWER
IS "DISPLAYS;:ANS$;:PRINTTAB(35,5)"PR
ESS SPACE";
580 ENDPROC
590 DEFPROC MVE(P)
600 YL=1:YR=1
610 FORI=1TO2
620 YL=YL+P:YR=YR-P
630 PROC PAN(0,YL,DISPLAYS)
640 PROC PAN(13,YR,REPLY$)
650 FORJ=1TO500:NEXT
660 NEXT
670 ENDPROC
680 DEFPROC RESULT
690 VDU7:CLS:PRINTSPC(22)"RESULTS"
700 PRINT"You got "STR$(SCORE)" quest
ions right out of the "STR$(NUMQUES)" qu
estions that you tried"
```

```
710 INPUT"Do you want another try? An
swer yes or no, then ENTER. "REPLY$:ENDP
ROC
720 INPUT""REPLY$:ENDPROC
730 DEFPROC CORRECT
740 SCORE=SCORE+1:PROC MVE(0)
750 VDU7:PRINTTAB(35,1)"WELL DONE "NAM
E$
760 PRINTTAB(35,3)"YOU ARE RIGHT"SPC20
770 PRINTTAB(35,5)"PRESS SPACE";
780 ENDPROC
```



```
10 = 00 270 = ED0F A 530 = ED0F C
20 = 00 280 = 7641 A 540 = F616 F
30 = 00 290 = EFE8 E 550 = 8FD9 8
40 = 7A16 6 300 = C219 1 560 = CDCE 4
50 = 4DB7 1 310 = 64BC A 570 = 1A20 D
60 = C510 5 320 = C28 3 580 = ED0F C
70 = 562D 3 330 = ED0F 5 590 = 9554 4
80 = E7C0 3 340 = 8741 B 600 = 592E B
90 = DADB 6 350 = 7A16 A 610 = 9A83 C
100 = C699 2 360 = AD27 8 620 = 776A 2
110 = 8F99 0 370 = 6CFB A 630 = D9B2 D
120 = A88A 9 380 = ED0F 0 640 = 3408 E
130 = A740 9 390 = 71BF F 650 = A93F 7
140 = 54AD 8 400 = FA51 2 660 = 2C83 C
150 = B862 C 410 = 3568 9 670 = ED0F A
160 = 47E4 1 420 = 4854 B 680 = EF18 D
170 = 8DBC 0 430 = E8BD 8 690 = 4710 F
180 = CA1 8 440 = 979F 5 700 = 7A80 D
190 = D6D3 9 450 = 87B8 8 710 = A027 2
200 = C9E0 6 460 = 736E 4 720 = D677 7
210 = ED0F 3 470 = 1BFF 2 730 = F8A1 A
220 = 36AC B 480 = ED0F D 740 = 92A3 E
230 = 9589 8 490 = 9807 8 750 = 8C2A 3
240 = B8CD 3 500 = 5C36 7 760 = CCF 0
250 = 5639 4 510 = CF72 E 770 = 55A9 F
260 = 9C5B 4 520 = 1A20 2 780 = ED0F 3
```


COME HOME TO A REAL LIVE WIRE

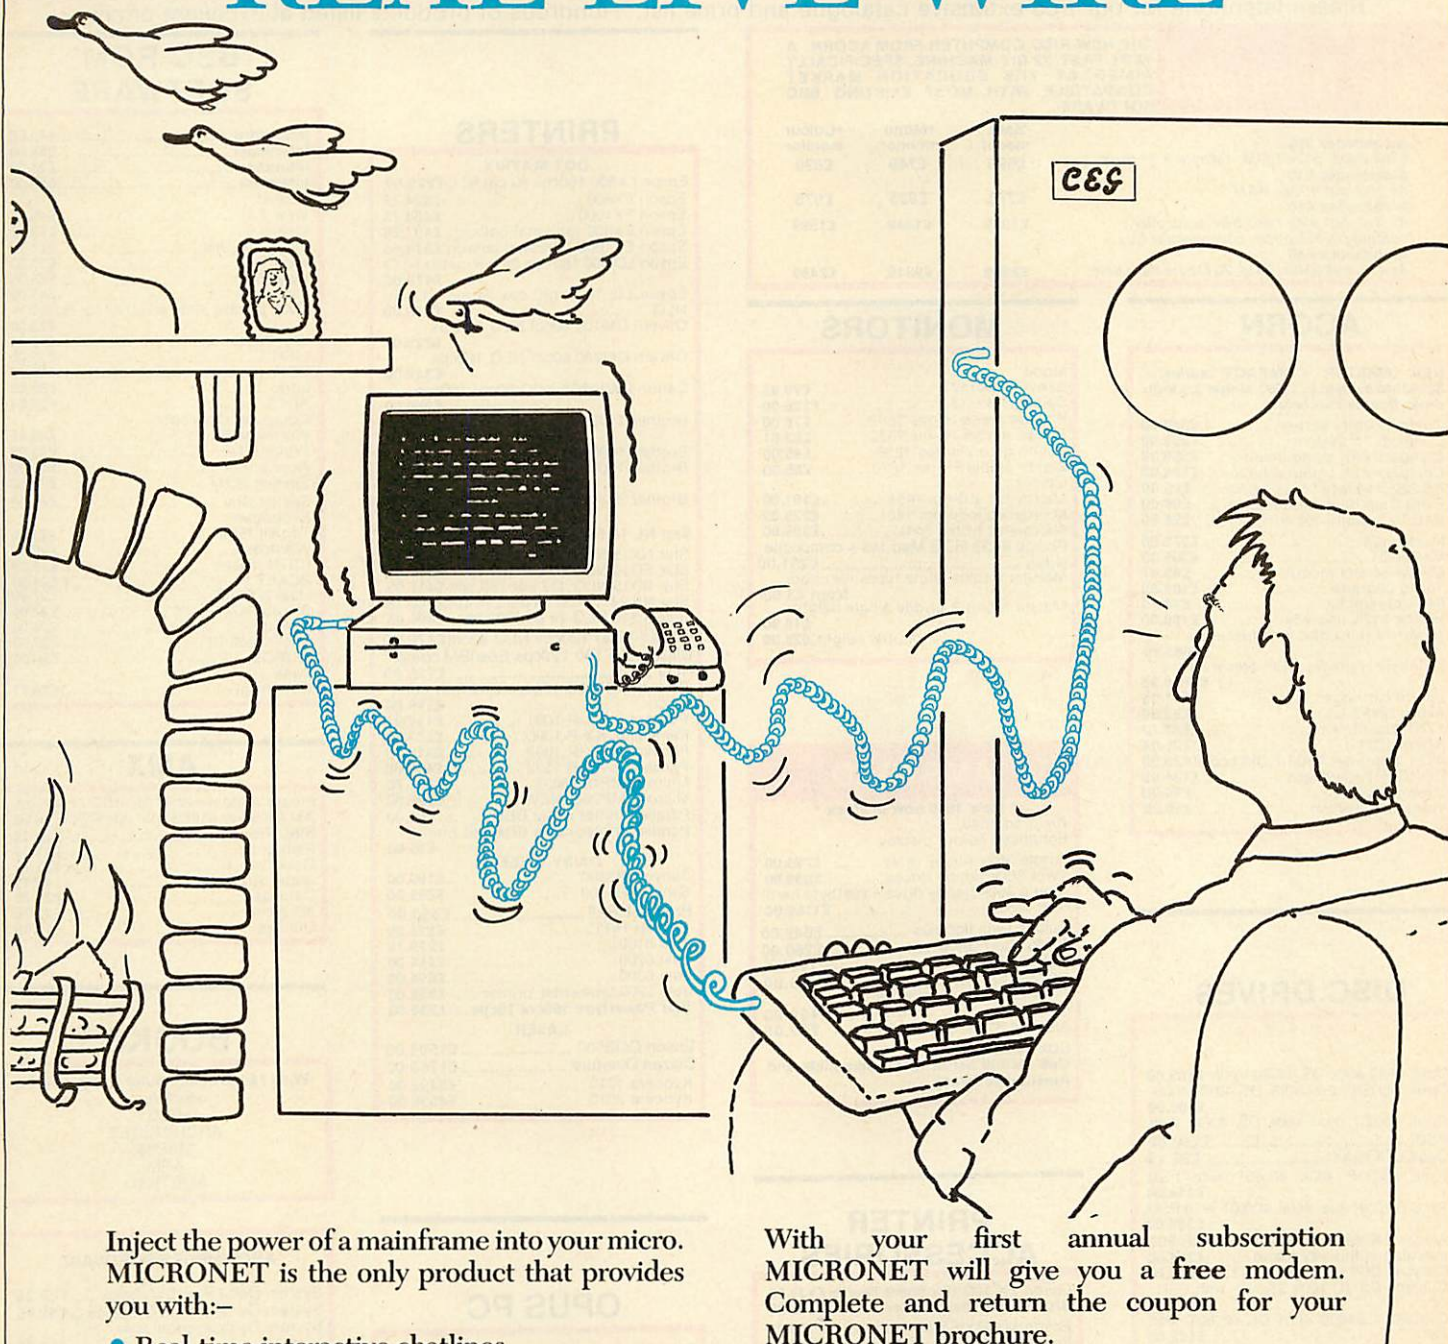

Inject the power of a mainframe into your micro. MICRONET is the only product that provides you with:-

- Real-time interactive chatlines
- Free and discounted telesoftware
- M.U.G.'s inc the UK's most popular SHADES™
- Daily computer news and reviews
- Free PRESTEL™ electronic mail
- Teleshopping – holidays, hotels etc.
- 70,000 PRESTEL users 56,000 Telecom Gold users
- National and International Telex
- Technical Support and Help Desk

PLUS: Access to PRESTEL and Telecom Gold, and there's much more – all for one low cost subscription. Modem owners call us now for an on-line demonstration.

With your first annual subscription MICRONET will give you a free modem. Complete and return the coupon for your MICRONET brochure.

MICRONET

MICRONET, Durrant House, 8 Herbal Hill,
London, EC1R 5EJ. Telephone 01-278 3143
Please send me a free MICRONET brochure.

Name _____

Address _____

Tel _____ Age _____

Micro _____ MU3/88



Computaccount (UK) Ltd
11 High Street, Harborne
Birmingham B17 9NT
Tel 021 427 9898

**We are major suppliers to the
educational and health sectors**

Please telephone for our free extensive catalogue and price list. Hundreds of products listed at excellent prices.



**THE NEW RISC COMPUTER FROM ACORN. A
VERY FAST 32 BIT MACHINE. SPECIFICALLY
AIMED AT THE EDUCATION MARKET
COMPATIBLE WITH MOST EXISTING BBC
SOFTWARE**

Archimedes 305
512k RAM, 512k ROM, 1Mbyte 3.5" drive
Archimedes 310
As 305, but 1024k RAM
Archimedes 410
As 310, but with hard disc controller,
floating point option, coprocessor bus.
Archimedes 440
As 410, but 4048k RAM, 20Mbyte hard disc

Base model	+Mono monitor	+Colour monitor
£699	£749	£899
£775	£825	£975
£1399	£1449	£1599
£2299	£2349	£2499

ACORN

NEW MASTER COMPACT series.
Standard system is 128K, single 3.5 inch
drive, bundled software.

Compact entry system £349.00
Compact TV system £359.00
Compact with mono monitor £389.00
Compact with colour monitor £529.00
RS 232 interface for compact £26.00
Extra 3.5in drive for compact £99.00
PAL TV adaptor for compact £26.00
Master 128 £379.00
Master ET £305.00
Master econet module £43.47
Turbo upgrade £108.00
64K upgrade kit £34.74
Master 512K upgrade £199.00
10 Mbyte Hard disc with filesaver £1086.95
30 Mbyte Hard disc with filesaver £1608.95
Eprom cartridges £11.95
Acorn DNFS kit £82.60
1770 upgrade kit £43.42
ADFS ROM £26.04
ATPL Sideways RAM/ROM board £39.00
CONCEPT Keyboard £124.95
View manual £10.00
Viewsheets manual £10.00

DISC DRIVES

Opus 5802 400k DS 40/80 track £109.00
Opus 5802DB dual 400k DS 40/80 track £205.00
Opus 5802D dual 400k DS 40/80 with
PSU £260.00
Opus DDOS kit £59.95
Pace PSD3P 400k 40/80T with PSU £144.00
Pace PDD3P dual 400k 40/80T with PSU £260.00
Akhter MD802E dual 400k DS 40/80T
mounted in monitor stand £285.00
Cumana CSK100 100k SS 40T £99.00
Cumana CS100 100k SS 40T with PSU £129.00
Cumana CS400S 400k DS 40/80T with
PSU £152.00
Cumana CD800S dual 400k SS 40T with
PSU £295.00
Cumana CS354 SS 3.5" with PSU £121.70
Cumana CD358 DS 3.5" with PSU £210.00
Cumana CCD2000S 3.5" + 5.25" with
PSU £282.17

MONITORS

Mono:
Sanyo DM4112 £79.95
Sanyo DM9112 £126.00
Philips green Hi-res 7502 £76.00
Philips amber Hi-res 7522 £82.61
Zenith green Hi-res 1230 £85.00
Zenith amber Hi-res 1220 £85.00
Colour:
Microvitec std-res 1431 £191.00
Microvitec med-res 1451 £229.00
Microvitec hi-res 1441 £399.00
Philips 8833 RGB Med-res + composite
video £251.00
Monitor cables (state types required)
from £3.50
Master Monitor bridge single height
£18.90
double height £25.00

AMSTRAD

* New 1640 now in stock *

Amstrad 1640
Enhanced colour display:
Single 360k floppy drive £799.00
Twin 360k floppy drives £899.00
Single 360k floppy drive + 20Mbyte hard
disc drive £1199.00
Colour Twin floppies £649.00
20Mb Hard Drive £260.00
PCW 8256 £299.00
PCW 8512 £399.00
PCW 9512 with Daisywheel
printer £499.00
Amstrad 3" discs box of 10 £30.00
SOFTWARE:
Call for full list of IBM/Compatible and
Amstrad software

PRINTER ACCESSORIES

Epson FX 100/105 Sheet Feeder £139.00
Brother HR sheet feeder £209.00
Epson MX/RX/FX 80 Ribbons £3.75
Epson MX/RX/FX 100 Ribbons £4.50
Canon PW1080/1156 Ribbons £5.00
Taxan Kaga KP810 Ribbons £5.00
Citizen printer ribbons from £3.99
All Epson Spares available EPOA
Massive range of other compatible
ribbons available

PRINTERS

DOT MATRIX
Epson LX800 150cps 80 col NLQ £229.00
Epson FX800 £324.75
Epson FX1000 £453.75
Epson EX800 (optional colour) £457.88
Epson EX1000 (optional colour) £614.63
Epson LQ 800 180 cps 24 pin matrix NLQ £479.00
Epson LQ 1000 180 cps 24 pin 132 col
NLQ £659.00
Olivetti DM100 80col NLQ 120cps £225.00
Olivetti DM280 80col NLQ 160cps £349.00
Canon PW1080A NLQ 80col 160cps £258.00
Brother 1109 Par. + Ser. 100cps + NLQ £209.00
Brother 1409 Par. + Ser. £349.00
Brother 1509 Par. + Ser. 180cps + NLQ £449.00
Brother 2024 Par./Ser. NLQ 24pin 160cps £750.00
Star NL 10 NLQ 80 col 120cps £239.00
Star NX15 NLQ 132 col 120 cps £330.65
Star SD10 NLQ 80 col 160 cps £330.65
Star SD15 NLQ 132 col 160 cps £415.65
Star NB 2415 NLQ 24 pin 216 cps £645.15
Star NB15 NLQ 24 pin 300 cps £806.65
Citizen 120D 120cps NLQ 80col £179.00
Citizen LSP100 120cps Eps/IBM comp
NLQ £225.00
Citizen MSP10E 160cps Eps/IBM comp
NLQ £296.00
Panasonic KX-P 1081 £159.00
Panasonic KX-P 1090 £233.00
Panasonic KX-P 1092 £315.00
Panasonic KX-P 1592 £405.00
Micro-P MP165 NLQ £208.70
Micro-P MP200 "NEW" £299.00
Parallel printer cable BBC £9.00
Parallel printer cable IBM, etc from
£15.00
DAISY WHEELS
Sanyo PR3000 £199.00
Sanyo PR5200 £299.00
Brother HR25 £550.00
Brother HR35 £825.00
Juki 6100 £279.75
Juki 6200 £454.00
Juki 6300 £694.00
Juki 2200 typewriter/printer £238.00
Star Powertype 165col 18cps £219.00
LASER
Epson GQ3500 £1595.00
Citizen Overture £1750.00
Kyocera 1010 £2495.00
Kyocera 2010 £4595.00

OPUS PC

PC3 SF Mono 256k £499.00
PC3 TF Mono 768k £699.00
PC3 HD Mono 1024k £995.00
PC5 (AD) HD Mono 1024k £1295.00
EGA System available - please
add £300.00

BBC ROM SOFTWARE

InterWord £48.00
Intersheet £48.00
Interchart £28.50
Interbase £59.00
Acorn:
View 2.1 £45.00
View 3.0 £63.00
ViewPlot (Disc) £25.75
ViewSpell £33.50
Viewsheets £45.00
Viewstore £45.00
GXR (please state whether for B or B+) £23.00
ISO Pascal £52.00
LISP £39.00
BCPL £46.00
Logo £52.00
ADFS £22.04
Computer Concepts:
Wordwise Plus £40.00
Printmaster £25.00
Accelerator £48.00
Speech ROM £27.50
Spellmaster £46.00
Beebugsoft:
Toolkit Plus £33.00
Wordease £25.00
ICON master £29.00
ROMIT £29.00
Help II ROM £27.00
Slueth ROM £27.00
Exmon II £28.00
Spellcheck III £32.00
MUROM £24.00
Pace £29.57
Commstar £29.57

AMX

Please state whether for BBC or Master
AMX mouse with Super Art ROM £78.00
Stop Press £43.43
Paintpot £13.00
Desk £21.70
Super Art ROM £43.43
Database £21.70
3D Zicon £21.70
Utilities £13.00

BOOKS

Wide range of computer books now in
stock for:-
BBC
ARCHIMEDES
MSDOS
ARM
AMSTRAD

ARCHIMEDES SOFTWARE

System Delta Plus Database £69.95
System Gamma Plus Graphics £69.95
System Delta Account (per
module) £64.95
School Administrator £79.95
Video Rental £69.95
Newsagent £69.95
Clares AlphaBase £49.95
Clares Image Writer £29.95
Archimedes Tool Kit Module £39.95

HOW TO ORDER

Payment by cheque to:
COMPUTACCOUNT (UK) LTD

Carriage: Items less than
£50:£2.50, £50-100:£4.50
Carriage and insurance on
items more than £100:£9.50

Please add VAT at 15% to Total,
including Carriage.

Send to Computaccount (UK) Ltd., 11 High Street, Harborne, Birmingham B17 9NT
or telephone 021-427 9898 with your Access details

NAME

ADDRESS

Quantity

Item

Price

£

£

£

£

£

£

TOTAL £



Remote computing

ONE of the problems I find when I'm at an Electron and BBC Micro User show is how to check my mailbox on MicroLink. I usually have to find an exhibitor who is demonstrating a modem and beg a few minutes of online time. Now, that's a thing of the past. Using a Z88 and Epson CX21 modem I can send messages all over the world via MicroLink using just my battery-powered system and any convenient telephone.

There is communications software available on rom for the Z88, but for most purposes the built-in terminal – selected using ☐V – works efficiently so you may as well save your money. Here's how to get on line even from places as far away as Tenerife.

The modem simply plugs into the Z88 and you should ensure that the two switches on the side of it are set to Full and Orig and the hardware is ready.

As for the software, the first thing to do is set the communication protocols. This is done from the Panel of the Z88, so select this from the index by pressing ☐S. The items that need changing are the baud rates and the parity but, as the present settings are probably the ones you use when you transfer files to your BBC Micro, it's a good idea to save them before making any changes.

From the Panel itself, press FS to move to the File Save menu and enter a filename – say PAN-BBC. When you press Enter you will be returned to the Panel ready to make your changes. At any time you want to send files to the BBC Micro just go to the panel, enter FL and key-in PAN-BBC to reload your default settings.

Now the default panel is saved for

- Enter Pipedream in the usual way.
- Start your text with the following two lines:
#V
.J
- Key in your text.
- Press FS to enter the File save menu.
- Change the Save plain text option to Yes.
- Type in any filename you want and press Enter: The file is ready to send.

Table I: Preparing a file off line.

Peter Davidson goes on line with a Z88 and a portable modem

future use, edit the display to the MicroLink settings: Move the cursor to the Transmit baud rate, delete it and enter 300. Do the same for receive rate, then move the cursor to Parity. Cycle through the options available – using J – and leave it set to SPACE.

You can then save these panel settings – say as PAN-300 – in the same way as when you saved the BBC Micro transfer protocols. Any time you want to reload either set just enter FL from the panel and key in the appropriate filename. Everything is now set ready to go on line, so press ☐V to go into terminal mode.

- Prepare a file as described in Table I.
- Enter communicate mode as described in the text and summarised in Table V.
- When you are ready to send the file press ☐F to take you to the File menu.
- Press EX for execute.
- Enter the filename of your prepared text.
- As you press Enter you will be returned to Communicate mode and see your file being transmitted.

Table II: Sending a file.

- While you are communicating, press ☐ followed by + and S and the screen output will be saved to a file :RAM.-/S.sgn.
- When you have finished receiving the file, close it by pressing the keys ☐-S.
- If you want to receive any more files, rename the system-generated one by pressing ☐F followed by RE and entering s.sgn for Name and any filename for New name.

Table III: Receiving a file.

Switch on the modem, dial 01-583 3000 (or a local MicroLink number) and, when you hear the tone, put the handset in the modem. The connect light should illuminate and you should enter:

CALL 72

Then type your identity and password – just as you usually do on your BBC Micro. Once you are connected to MicroLink type SS and, from the Terminal Type menu that appears, select Z88.

Table I shows how to prepare a file before you go on line, and the keys you use and instructions for tasks you may want to carry out while you are on line are shown in Tables II to IV. Table V is a quick reference guide to getting on line and Table VI shows how to view a file you have received.

And that's all there is to communicating from any telephone that fits into the modem. It's almost as easy to check your mailbox from a hotel phone as it is from home or the office.

- S Stop text scrolling.
- Q Restart text.

Table IV: Important keys while on line.


- Select Panel with ☐.
- Save current settings with FS.
- Edit settings or load new ones with FL and press Enter.
- Enter terminal with ☐V.
- Switch on modem.
- Dial 01-583 3000.
- When you hear the tone, put handset in the modem.
- Type CALL 72
- Enter your ID and password in the usual way.

Table V: Summary of how to get on line.

- Enter Pipedream by pressing ☐P.
- Enter FL and use the filename :RAM.*/S.*.
- Set the width to 60 using W.
- Set the margin to 60 using H.
- Press R to reformat each paragraph until you reach the end.
- Move up and down the text to view it in the usual way.

Table VI: Viewing a file.

It's the latest – and the most exciting add-on for the BBC Micro

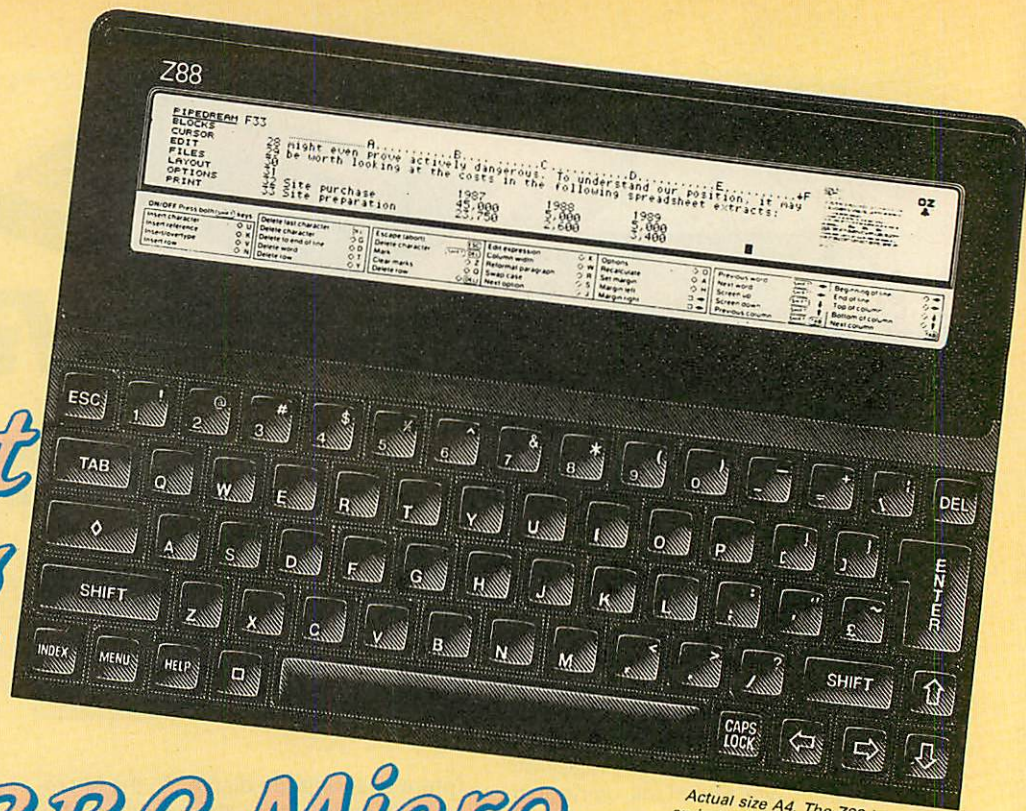

Actual size A4. The Z88 is less than an inch thick and weighs under 2lbs!

The Sinclair Z88 is the world's first truly portable, truly full-facility computer. And because it uses BBC Basic it is the ideal companion for the BBC Micro and Master.

Use it on the move!

Because it weighs less than a bag of sugar, it's an ideal travelling companion. Word-process your letters, memos or reports while on the move – then when you're back home or in the office transfer your files to your BBC Micro – it's done in seconds!

Solid-state storage

The Z88 doesn't need bulky disc drives. Memory is stored in solid-state interchangeable packs measuring 2½in square. Extra ram and eprom packs are available from suppliers such as Watford Electronics.

SPECIAL OFFER!

Exclusive to readers of *The Micro User* – the Z88 comes complete with a disc of games and utilities you can transfer direct from your BBC Micro with the FREE lead supplied.

The disc and lead can be bought separately for £22.70 from the address given on the coupon.

ONLY
£249
plus VAT

What the Z88 offers:

- 32k of ram built in, easily expandable to 416k.
- New supertwist LCD screen for sharp, clear viewing.
- Built-in word processor, spreadsheet, database, calculator, diary, calendar, comms, real-time clock and alarm – all included in rom.
- BBC Basic with integrated Z80 in-line assembler.
- Runs on four AA batteries, or use a mains adaptor.
- Printer editor to drive a wide range of printers.
- Detailed 218-page manual.

ORDER FORM

Please send me a Z88 with FREE disc and BBC Micro/Master lead for **£286.35** (£249 + VAT).

- ☐ Cheque enclosed payable to Database Electronics
☐ Please debit my Access/Visa no:

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

Expiry date _____

Signed _____

Name _____

Address _____

Postcode _____

SEND TO: Database Electronics, Europa House, Adlington Park, Adlington, Macclesfield SK10 5NP.

Telephone orders: 0625 879940

Orders by Prestel: Key *89 then 614568383

MicroLink/Telecom Gold: 72:MAG001

MU3



ORDER TODAY

Try putting it on ice

ICE stands for integrated circuit emulator and Ice-King from Lancaster Consultants emulates that king of ICs the 6502 microprocessor. Well, why pay £250 for an emulator when you can get the real thing for under a fiver from Watford?

The point is that if you are making your own microprocessor system an emulator will allow you to take the lid off the central processing unit — CPU — and see what is happening. In this way, the theory goes, you will be able to develop and debug software and hardware much more quickly.

Ice-King consists of a sideways rom and an interface that plugs into the 1MHz bus. Out of this interface — which has all its components set in solid black epoxy resin — comes a ribbon cable with a 40 pin dual in-line header plug. This is inserted in the system you are making — the target system — in place of the 6502 chip.

Then your BBC Micro — the host system — can generate all the signals normally produced by this chip. This means the host computer can look at all the information — data and instructions — as it flows into and out of the 6502.

This allows you to see what instructions are being fetched and what effect they have on the registers and flags. However, because your target system is being driven directly, all the hardware attached to it will work in the same way as it will in the final application.

Built-in assembler

Instruction code can be fetched either from the target machine or from the host. The great advantage of the latter is that you can use the BBC Basic built-in assembler to generate your code and then later, when you know it works, transfer it into eeprom for running on the target system.

In this way a program may be forced to run even if the target system has faults on it that would normally prevent it from working. This overcomes one great problem in commissioning a system, namely that more than 90 per cent of the circuit must be operating before anything will work.

That's the theory, so let's see how Ice-King measures up. The power for the emulator interface is drawn from the target system in the same way as the

Mike Cook examines a

neat integrated circuit

emulator that cuts costs

microprocessor would in its final configuration. However, the emulator takes slightly more current than a microprocessor. This could be seen as an advantage, as it forces you to allow an adequate safety margin on your power supply requirements.

Menu options

The driving software is fitted into sideways rom and is called up with *ICE. You are then faced with a menu of eight choices. The first is a memory inspect and change, and allows you to single step through memory, altering each location.

Like most of the menu options, you can operate this in the local or remote mode. In the local mode the memory locations are those inside the host computer whereas in the remote mode, memory in the target system is used.

As well as single memory location examination, the Window option allows you to look at 64 bytes at a time viewed in both Ascii and hex. There is a disassembler which works on a line-by-line basis or on a whole block, and also has the ability to transfer blocks of code between the two systems.

The most important option from the menu, however, is the emulator which executes the programs. In single-step mode the address, instruction mnemonic and register state are displayed after each instruction is executed. So you can see exactly what effect your program is having on the inside of the microprocessor.

When an interrupt request — IRQ — is received, the display turns blue, or red if it is a non-maskable interrupt — NMI. Then, if the appropriate flags are set, the interrupt service routine can be executed by pressing a key. This can also be single-stepped and in addition it is possible to set a number of break points.

The only problem with emulators in general is that they do not work as fast as the original microprocessor — the Ice-King runs at about 1/100th of normal

speed. This is normally quite all right as single-stepping at full speed would be a little silly.

However, when it comes to servicing frequent interrupts, an emulator can become saturated by the interrupt task and have little time for the foreground task. Therefore when you are developing a system that has to respond to frequent and rapid interrupts you will not be able to perform a full emulation.

Ice-King also makes some economies in some of the more obscure signals generated by the 6502 microprocessor. The synchronising clock signal is fed straight from the 1MHz signal on the BBC Micro and the other phases of the clock are not synthesised.

Also the sync out signal that identifies an op-code fetch is not produced. This will not be of concern to the vast majority of target systems, but I think these points should have been mentioned in the documentation.

The 18-page manual covers the basics of driving the emulator. However to my mind it does not give enough technical information about the system, nor any hints and advice on how to go about tracing faults on a target system. That said, perhaps anyone who would want to use an emulator would know what he is doing anyway.

To help speed your development of a target system, Lancaster Consultants can provide a simple 6502-based system with space for 4k of eeprom, 2k of ram and a 6522 VIA. There are also add-on boards for this to give a serial interface, optically-isolated I/O and an analogue to digital converter. This makes the development of stand-alone systems easy and economical.

When compared to other emulators Ice-King is very reasonably priced, as you are normally talking in the £5,000 to £20,000 price bracket. I see this system finding favour in many educational establishments where dedicated microprocessor systems are studied. Also in consultancy work, and for the dedicated hobbist it will no doubt find a home.

Product: Ice-King Hardware Micro-processor Emulator

Price: £250.00


Supplier: Lancaster Consultants, 2 Edenbreck, Sunnyside Lane, Lancaster LA1 1PG

Tel: 0524 65179

VOLTMACE



COMPATIBLE

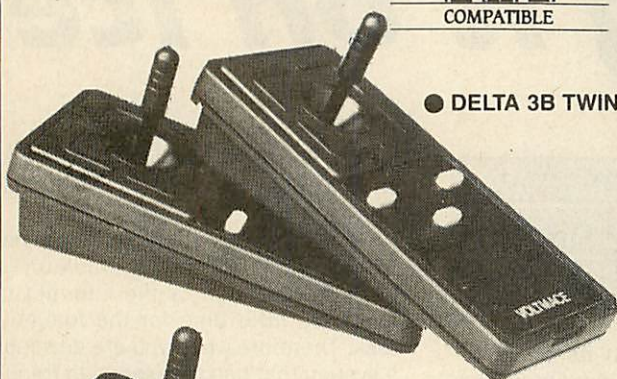


● DELTA 3B TWIN




● DELTA 14B



● DELTA 3S or 3SO

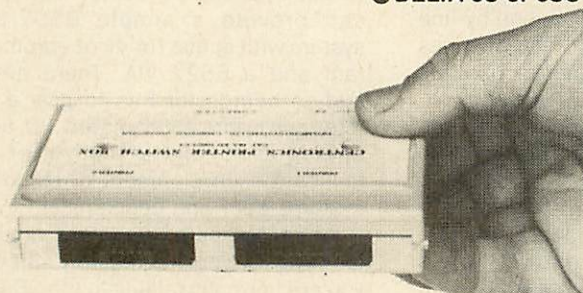

● DATAPRINT 2P

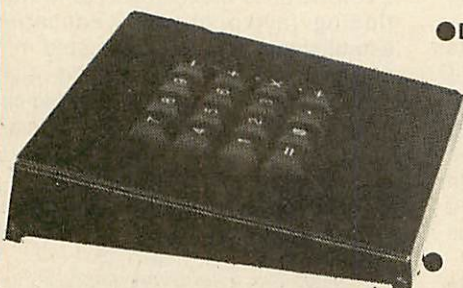

● DATAPAD 16B

SPECIAL OFFER WHILE STOCKS LAST

Double Sided, Double Density, 80 Track,
1/2 Height Olivetti DISC DRIVES with lever fronts in cream steel
cases complete with leads for BBC B, Master etc.

£74.95 inc. VAT and P&P

Also available uncased £60.00 inc. VAT and P&P

FOR A BBC A, B, B + & MASTER

DELTA 3B TWIN -

£19.95

2 joysticks wired to one plug.

As with all our joysticks they have the fast action sprung to centre return of the steel shafted nylon covered joystick. The light action makes them ideal to hold and the 3 fire buttons allow left or right-handed use.

DELTA 3B SINGLE

£12.95

A single joystick that in some ways can act as two. The custom made potentiometers are wired so that it will work as a left hand or right hand joystick. It can run some programs written for two joysticks and has two independent fire functions.

DELTA 14B

£14.95

Our original ACORN/BBC handset. The same super light joystick, but with 14 long life buttons, video game tested for many years. A DELTA14B/1 is needed to run the keypad but a 14B on it's own will work as a joystick and fire buttons, so you can always add the 14B/1 to it later.

DELTA14B/1 for use with 1 or 2 DELTA 14B's

£14.85

DELTA DRIVER CASSETTE

£5.95

The A/D/USER PORT interface box. This gives simultaneous access to both the analogue port, for the joystick part and the user port, for the keypad. Two handsets can be plugged into the box giving a total of 24 user definable keys.

N.B. On a Master a small extension lead is needed to clear the RGB socket (£5.95 extra).

Full instructions are provided to include the keypad in your own programs even in BASIC or for the non-programmer a DELTA DRIVER cassette is available with keyboard to joystick/keypad conversions and keypad set up programs.

FOR THE MASTER COMPACT OR ELECTRON FITTED WITH A SWITCHED JOYSTICK INTERFACE

DELTA 3S

£12.95

For an ELECTRON with a switched joystick interface (not a PLUS 1) this gives you the same delightful light, fast action of the DELTA joysticks but fitted with a 9 way D plug as per Atari, Commodore, etc. and will run on First Byte interface or similar.

DELTA 3SO - OPTICAL FEED BACK

£19.95

Now you can see exactly when each switch has operated so you can move about faster and more certainly guaranteeing diagonals.

SPECIAL OFFER

CUMANA TOUCHPADS - The touch pad allows you to transfer sketches onto your screen by using a stylus on a touch sensitive pad
Absolute bargain £14.95 inc. VAT and P&P

Monday - Friday callers only

A selection of green screen monitors from £29.95 to £59.95

NEW !!! DATAPRINT 2P LOW COST - LOW PROFILE - PRINTER SHARER

£34.95

A neat small unit which allows two parallel printers to be connected to one computer and simply switched between the two. e.g. one printer for paper and one for labels.

DATAPRINT 2C LOW COST - LOW PROFILE COMPUTER SHARER

£34.95

The opposite of the DATAPRINT 2P this little box just 125 x 90 x 20mm allows two computers to share one printer.

Computer to Sharer leads

£5.00

Sharer to Printer leads

£5.00

DATAPAD 16B

£39.95


A commercial spec. 16 way keypad. Full travel mechanical keys with double shot moulded keycaps mounted in a low profile metal case. The keys are marked with calculator legend, but the software included allows the pad to be defined as any keys, including function keys or single byte VDU commands such as PRINTER ON/OFF. No tampering with the computer as it fits onto the user port.

Access

Available from your dealer
or direct from us on
(0462) 894410

VISA

Unit 9, Bondor Business Centre, London Road, Baldock, Herts. SG7 6NG. Telephone (0462) 894410

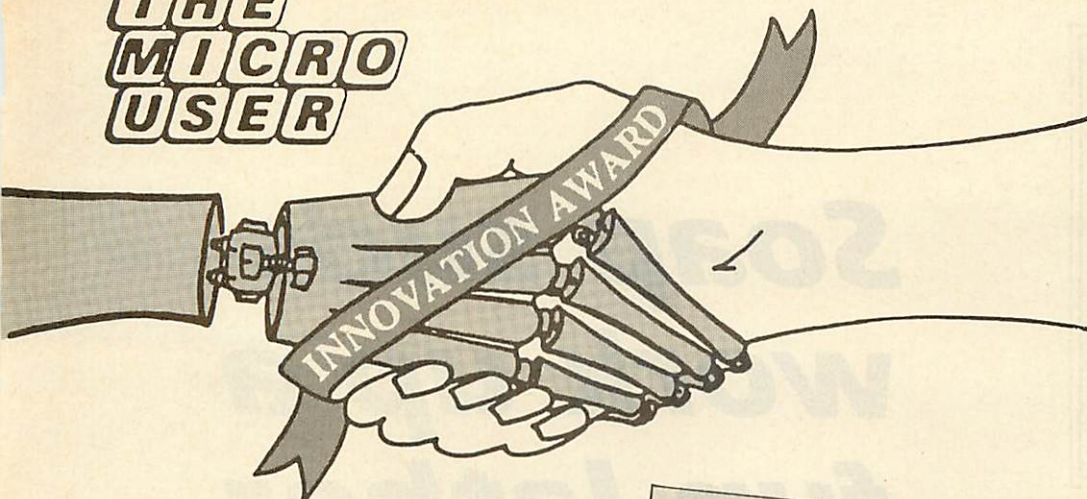

Goodbye Innovation Awards 1987 ... Hello Innovation Awards 1988. Here are the final reports featuring the last three runners-up in The Micro User Innovation Awards 1987.

But it's not all over. Far from it. Such was the interest created by the inaugural competition that it has been decided to make it an annual event.

Details of this year's competition can be found in the news pages.

Youth has its day

Special recognition was given to the youngest entrants for the Innovation Award – budding publishers William Bryan (11) and his friend Tim Sargeant (12).

The Sudbury, Suffolk, youngsters use a BBC Micro to produce a weekly magazine, about computing, which they sell at their school.

With help from Fleet Street Editor and Interword, they write news and feature items on the computer and lay out the printouts on A4 pages before photocopying them.

The idea of the publication is to provide information for their schoolmates aged between nine and 12 to enable them to learn more about computing. The magazine – priced 10p to offset production costs – is one of the school's most popular projects.

BBC Micro 'bloodhound'

Measuring blood patterns in the brain of a hospital patient is a relatively straightforward task, even though it usually takes a 16-bit mini computer, small field gamma-camera and the resources of a medical radioisotope department.

If the patient is very ill and is best not moved from one end of the hospital to the other – yet requires repeat scans to monitor his progress – the task becomes more difficult.

The Western General Hospital in Edinburgh has overcome the problem with a BBC Micro-based system which formed the entry of medical physics technician C.M. Ferrington who lives in South Queensferry, West Lothian.

A second-hand gamma-camera is sited in the neurology department close to the patients it is required to scan. Alongside it is a linked BBC Micro system.

The BBC Micro controls the acquisition of 256 1k images collected from the patient over 80 seconds following the injection of a radio-

active tracer. At the same time, a second small radiation detector is monitoring the injected activity as it flows through the heart, and a curve of this activity is built up in the data logger.

Both total brain and heart radio-activity levels are plotted on-screen by the micro during the acquisition to show that things are proceeding normally.

At the end of the scan the data is transferred from the 256k data-logger memory via the BBC Micro on to a floppy disc. The disc is then taken to another BBC Micro linked to the mini computer system via the RS423 port.

A certain amount of preprocessing is carried out by the BBC Micro. The heart curve is fully analysed, and the brain images are summed together in groups to form a 20-frame sequence of the relevant part of the scan before sending to the mini for processing into the final blood flow parametric images.

Help for amnesia victims

Bristol neuropsychologist Dr Seldon Curry developed a home-based rehabilitation programme to assist patients with severe head injuries to make a full and speedy recovery.

Patients either enter the programme as soon as possible after their accident – usually on emerging from a post-traumatic amnesia of at least a week – or after several years of recovery.

The basic idea of cognitive rehabilitation is provision of a structured and progressive set of stimulating and intellectually challenging material designed to exercise the

more general areas of cognitive impairment following cerebral trauma.

These areas include attention span, attentional control, impoverished memory, slowness, logical problem-solving, and so forth.


Dr Curry decided to present this material via a small, relatively inexpensive computer, so that the rehabilitation programme that could be primarily home-based.

Patients use their own – or a loaned – BBC Micro, Master or Compact, and are provided with the necessary peripheral equipment

including hi-res colour monitor and modem. A network system was developed allowing each of the remote machines in patients' homes to be linked to a central computer at the Burden Neurological Institute in Bristol using modems.

The network system provides both continuous control over the patient's rehabilitation programme and the monitoring of his or her performance.

The electronic mail link is only connected for the transmission of programs and receipt of results, which ensures that telephone charges don't become unreasonable.

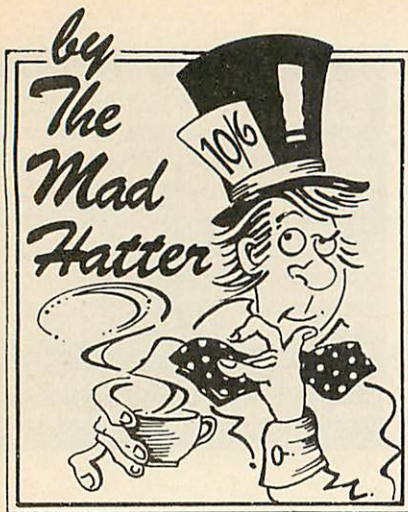

Soap suds work up a fun lather

THIS month we start with some good news and some bad news. First the good news: Geoff Larsen has sent me details of his latest adventure, **Hex**. Set in peaceful Cornwall, it offers an eerie romp as the player gets involved in various dark doings. Look out for a full treatment as soon as the game itself lands on my desk.

Bad news is that Rob O'Leary has been underwhelmed at mail order sales of recent Robico adventures. If it means that interest from BBC Micro owners is flagging, Rob will turn his attention solely to Archimedes games. You have been warned.

It's happened again: A tape arrived some weeks ago — hand-lettered Demo copy. I put it on one side and almost forgot it. If I had, another valuable contribution to the BBC Micro adventure scene would have gone unremarked by yours truly — a fate like Wordsworth's Lucy, of whom he wrote that very few knew or loved her.

Suds, by Riverdale Software, 95 Prinston Avenue, Manchester M9 3JW is a four-part Quilled adventure on cassette for the BBC Micro which will run on the Master 128. At £4 it is excellent value

for money — available by mail order and some retail outlets.

The title rightly hints that it is a soap opera spoof. You start at Emeroyd Farm — a rotting pile if ever I saw one — and your task is to win a part in East Enders since a misguided bull appears to have demolished the rest of the cast in your own show.

The style of humour can be judged by the fact that the scene opens with a frog busy phoning the AA for a traffic report, and that later in part one you come across some tadpoles learning the green cross code!

I found the initial frog worth closer examination as well as some osculatory exploration. It proved the key to all that followed.

Each part can be played separately even though, strictly speaking, Suds should always be played through systematically. If you survive part one, you arrive in Manchester, where you have to experience the trials and tribulations of Abdication Street.

Part three features the Cross Eyes Motel and if you can cope with that, off you go to the Dead End of London for the final scenario. Response is at times

amusing — trying to pick a lock without the appropriate instrument caused me to learn that there were other things I couldn't pick, either. I approve of the bad language response in part one too — you get sent back a number of spaces.

An interesting command provided is **LOCATION** — which gives a number for each one in the game: Maze mapping is thus much easier.

Add this one to your collection, and look out for my comments on **American Suds**, again by Riverdale, in the next issue, since that adventure has just reached me.

See you next month. Until then, happy adventuring.



Helpline

Barbara Gibb — an old friend of this column — offers other readers help as follows:

Dodgy Geezers: The password is **SWORDFISH**, found on the box of matches in the snug bar. The club opens on Friday night so be ready to enter at about 91 turns.

Wizard's Challenge: The finger needs a nurse to bandage it. The medical room is in the classroom area.

Go to the end of the corridor, search so that a teacher takes you to the Head's office where you can take

the keys. From there go W, W, N and N where a nurse will do the necessary. Don't forget to take any spare bandages left lying around.

Blue Dragon: **PLAY FLUTE**, and when you stop the wizard will be so grateful he frees the bird from the spell.

Firienwood: Use the spell **NEIRIF** to escape the blizzard.

Barbara is stuck in **Village of Lost Souls**: She needs to go to the cabbage patch for the kid who will pacify the goat.

Elite Tips III

When you have finally arrived at Cearso in Galaxy Two — no doubt rather battered, since this is the first Anarchy system I have led you to — use f6 to obtain the next message. The fugitive Constrictor has gone to Errius, which is a long trip.

I chose the following route to maximise trade and minimise combat, but I'll leave you to work out the trading options: If you've followed the last two months' advice, you should have no problems.

From Cearso go to Labilaen, Ustile, Arines, Beused, Usedge, Erlaened, Maeseron, Esbete, Anusa and so to Errius.

You'll then be sent to Inbibe, which means going back to Anusa and then via Laribebi.

At Inbibe the message will tell you that the Constrictor has gone to Ausar — an Anarchy system. There are two routes to choose from, depending on how confident you feel. The shorter is via Dixeza — another Anarchy system. The second voyage involves returning to Laribebi and then going to Esbete before attempting to enter the Ausar system.

I tried them both on your behalf, and have to report that I arrived in a similarly battered state, with Front Shields well depleted, whichever

route I took. At Ausar you will be told that your destination is Usleri. Be careful here: Although the short range chart doesn't show it, this planet is only 6.8 light years away.

Use the long range chart, press the F key to locate it and then launch yourself.

When you reach Usleri you'll be told that the killer is at Orarra — not far away, via Zatebiso.

On arrival at Orarra the message tells you that the Constrictor is roaming the system and you are welcome to tackle him.

Launch yourself, head away from the space station until you are out of the safe zone, then jump. Your opponent will be a single ship, never in company, easily recognisable — but it may not turn up at once.

I conducted this part of the Mission three times, and here are the results. Sortie 1: One jump away from the safe zone I faced an attack wave of four pirates and destroyed them.

After that, the Constrictor appeared and it was a question of undisturbed single combat during the course of which it fired four missiles straight at me.

I destroyed them with my ECM system, finished off the Constrictor and returned to the space station

without further interruption. Combat time — about five minutes hard work.

Sortie 2: I made about 20 jumps from Safe before anything actually happened. I then faced attack waves of three, two and four ships respectively before the Constrictor appeared again.

During our combat, it again fired four missiles which this time I destroyed by laser fire, but now the process was interrupted by pirate attacks.

Twice single ships interfered and finally a wave of three attacked me together. After destroying the Constrictor, I was attacked by eight hostile ships on the way to the space station. Combat time — about 10 minutes.

Sortie 3: Seven jumps out, the Constrictor appeared, and again fired four missiles. We were interrupted by a single pirate and I met another four on the way back.

Combat time — about four minutes and then it was, "Come along, darling, your lunch is getting cold".

The main lesson is this: Hold on to that Constrictor like a terrier and keep hitting it. It will take a lot of punishment before exploding. The moment it is destroyed you are awarded Dangerous status.

Hall of Fame

Marcus Turner has sent in a superbly detailed solution to that excellent Robico adventure **Rick Hanson**, but can someone help him in **Stryker's Run 2**? How do you get the jet pack and key on section 2 Crew's Quarters?

Thanks also to Dave Hunt for a solution to **Suds**, and to Kay Chappell for her full solution to **Wizard's Challenge**.

Problem Corner

James Harwood is in trouble with **Dennis Through the Drinking Glass** and I don't have the game: How does he get the drink? Would anyone care to send me a solution?


Return to Eden Solution Part One

As I introduce another game solution it's worth restating my policy on this sort of thing. I will not publish solutions to games that are very much part of the current scene: I don't believe that's fair.

On the other hand, readers often tell me that by publishing solutions to older adventures, I stimulate them to try again when they have been stuck for months or even years.

Return to Eden is the part of the Silicon Dream Trilogy by Level 9 that I enjoyed most. Once again, you will still have to map the game carefully in order to complete it — I don't believe in making things too easy!

At the start, move in to the cupboard, wear the radsuit and take the

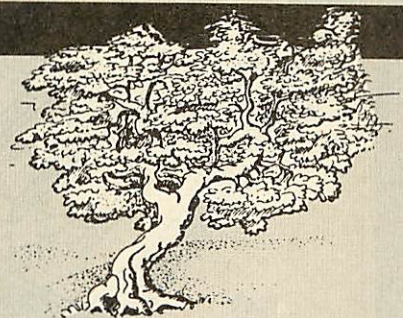

compass and geiger-counter. Go out, out, and East to the molehill, then dig into it. Locate and sleep in the cave with leaves, find the spade and dig in the loose earth.

Travel East to the forest, but remove the radsuit before entering.

Turn to Page 60 ►

Return to Eden Solution Part One (continued)

◀ From Page 59

then find and eat the bean so that you can carry more objects. Collect tubers, stem, airseed, wishbone, stonefruit and take the sweet pea and drop it to get the egg, then plant it with the spade to create the houseplant.

Go in to find the fish fungus needed by the leviathan. Look through the telescope and return it. I wore the fig leaf rather than the tradclads.

Cross the river, feeding leviathan on the way, and eat the pill to avoid radiation sickness. The parrot's nest needs to be found in the maize if something has been stolen. From the riverbank go N, E, W, and S to the nest, then S to leave the maize.

When you have everything, relaunch the canoe, go S to get the log and then E to the island. Once you are on the tiny island, squeeze the

log and the bulb will become a parachute. You can now go safely down.

Explore the jungle area thoroughly. Dig at the twisted tree to find your roots which are an essential item later in the game. Find the bug and the rubber band, go to the woodpile and throw the clingvine so you can climb up into the trees.

Drop six objects – but not the stone fruit – at the platform so you can then go higher up in the trees when the lever on the other platform is pulled. Mend the branch with the glue berry.

You are only allowed to take one object across the branch at a time – so take the stalk first. The cherry is a grenade that will explode if you drop it. You will then be heavy enough to go back down again.

Before leaving the trees make sure nothing is left on the south platform, or else it will be lost forever should you use the north platform with the

lever as a short cut to ground level.

Wear the foxgloves to take the cold leaf and freeze the bog by dropping the leaf so you can get and wear the cloak.

Play the stalk with twigs and the ants at the leaf pile will follow you. Lead the ants to the fence and they will trample it down.

Wear the cloak and carry the bug. Make a catapult by tying the rubber band to the wishbone, then fire the cherry bomb to make a path through the minefield.

Wait at the beach for the autoscythe machine and then get out at the east end of the beach. Wait again for the weeder, but let it dump the rubbish before getting in. You can get out at the NW corner of the wheatfield, but make sure you have the stone fruit, spade and air seed. Then go North into the river and take the credit card before emerging.

INTEGRA-B

MOUSE DRIVER

DATE TIME

EXTENDED OPERATING SYSTEM

SELECT START-UP CONFIGURATION

64K RAM

SHADOW RAM

REAL TIME CLOCK

BATTERY FOR ALL RAM & CLOCK

SYSTEM BUFFERING

UP TO 128K RAM OR ROM

EASY INSTALLATION

CONFIGURABLE FOR PRINTER BUFFER

COMPATIBLE WITH SECOND PROCESSOR DFS & ADFS

THE ONLY SINGLE BOARD EXPANSION WITH ALL OF THESE FEATURES AND FULLY INTEGRATED MANAGEMENT

computech

APPOINTMENTS MANAGER

AUTO RUN BASIC PROGRAMMES AT POWER-UP

The Garth, Hampsfell Road, Grange-over-Sands, Cumbria, LA11 6BG Telephone: 044 84 4604

THE review of Genie in the October 1987 issue of *The Micro User* concluded that it was an excellent piece of software and well worth the money. Comments were made to the supplier, Permanent Memory Systems, about the desirability of some extra printing and spooling options, and as a result the company has enhanced the product by developing a disc of Genie utilities.

The disc is loaded with the usual Shift+Break, after converting it as necessary to 80-track format and DFS/ADFS, which is explained in the manual. You must have shadow ram turned off, and a message to this effect appears if you accidentally leave it on.

You are then presented with a menu of five options, selectable either by moving the highlight bar with the cursor keys, or by pressing the appropriate number. Perhaps a very minor modification here would be to make the selection conform to Genie itself, which immediately processes the keypress: With the disc you have to press Return after the digit.

All the options are concerned with manipulating the data stored in Genie itself, and selecting option one deals with the address book. The system will print either the name and address only in label format, or all the information, including the phone number and details.

Keyword search

You have the option of limiting the records printed either by range or keyword, and this latter facility is extremely powerful. The keyword can be in any of the address fields, so for example, there is no worry as to whether you put the town name on the second or third line. The search is not case sensitive and the keyword can include wildcards.

In addition to printing, the information can be spooled out to a disc file, thus making the data available for other programs, and as with printing the spooling can be limited by keyword or range.

Information can also be imported into Genie's address book from data stored elsewhere. I wish this had been available earlier. My address file was on another computer, so had to be printed out and then laboriously re-entered. With this facility the data could have been ported over as Ascii and then imported.

It must be in the correct format and PMS wisely warns you to make a backup of your current Genie data using the built-in *GBACKUP command before attempting to import, in case you do something wrong and possibly corrupt your current data.

The manual gives brief details and examples of compatible files – spooled files from Wordwise and Interword, or

Paul Hendy investigates two utility packages for the perfect add-on

saved files from View, and data files from Masterfile or Interbase can usually be modified, but you are advised to check with PMS if you have doubts about your own particular files.

The import option can be limited with a Y/N response for each address so control can be exercised over which addresses are inserted into Genie.

Menu option two concerns the notepad, and will either spool or print selected pages, limited either by range or keyword. The keyword can, like the address book, appear anywhere on the page, so for example you can search for and print all note pages that refer to a current business transaction or piece of software.

Desk Diary

The Desk Diary menu option is probably the most important and will print or spool out diary entries for a range of days. There is no option for keyword, which is irrelevant in these circumstances. The entries are printed out in two columns, and if required you can have a space printed for blank diary entries.

A nice feature is that you can have your diary entries printed out as a week planner, and it all fits on to one standard page. Because there are seven days, and the entries are printed out in two columns, there is a convenient space at the bottom right of the page for the program to print the calendar of the appropriate month, with indicators as to which week of entries was being printed.

This option is very useful as the page can be slipped into a folder when attending meetings. The calendar can be printed by itself and will be correct for any day this century.

Menu option four prints or spools the entire phone book from Genie containing surname, first name, and telephone number. The entries are in alphabetical order, and a blank line is printed before each new letter of the

alphabet to break the entries down into groups.

The final menu exits the system, and you are warned in the manual not to exit by pressing Break, but to do it correctly by selecting 5+Return.

All in all this is an excellent utilities disc, and makes Genie even more indispensable. Quite superb value for money.

Product: Genie Utilities Disc

Price: £9.95

Supplier: Permanent Memory Systems, 38 Mount Cameron Drive, East Kilbride, Scotland G74 2ES

Tel: 03552 32796

UNTIL now BBC Micro owners have had to accept that with Genie they would have to enter the date each time they wished to use the package – but not any longer.

PMS has launched Genie Watch, a small rom package about the same size as Interword – slightly taller than a normal rom, but it fits into the usual socket – and it adds a real time clock, which maintains the current date and time even when the machine is turned off.

Now when you enter Genie diary it is automatically at the current date. In addition you can have the time displayed in the top right corner of the monitor screen. This is activated by *CLOCK ON and the sheet of information warns that any shadow ram should be turned off. It transpires that this is for Compact only – the program behaves perfectly well with my Watford board.

There was no need for a manual because all the program does is display the time. But it enhances Genie into what I believe is the ultimate accessory for the BBC Micro. Compact owners will be interested to know that an enhanced super-clock is available for them, with countdown timers and alarms.

Product: Genie Watch

Price: £34.95 (£29.95 for registered owners.) Compact version £34.95

Supplier: Permanent Memory Systems, 38 Mount Cameron Drive, East Kilbride, Scotland G74 2ES.

Tel: 03552 32796

At last a machine code development system that *really* does outperform ADE

62 MICRO USER March 1988

PROBLEM SOLVED

PC transfer

I WOULD like to be able to transfer Basic programs, data and text files between the two IBM-compatible PCs I have at work and the BBC B at home.

A colleague has suggested that a second processor would make this possible. Can you tell me whether this is the best solution, what problems of limitations I am likely to encounter, and which processor would be most appropriate? — **Dr. David Briggs, Brussels.**

● No, a second processor is not the way to tackle this problem. The difficulty lies in the way the data is stored on the disc.

A standard Acorn DFS uses single density 80 or 40 track storage, whereas the IBM PC almost exclusively uses double density. So the first step is to get a Watford DDFS which uses double density.

Next, an Acorn DFS holds the disc catalogue in track zero and saves files as contiguous blocks, but almost every other micro puts the catalogue on a different track, uses a different format and stores files in scattered blocks. So you need some software that can read the IBM PC disc format.

The other option is to get a PC to read an Acorn DFS disc. One such utility I have used with success is Beebos from Microboss (02556 71095) but you still need to write in double density with the DDFS — unless you are using an PC/AT with 360k drive which can read and write single density.

However, once you've done all that you have to bear in mind the internal file formats are still not compatible — although Beebos does have some format conversion utilities as well. But Microsoft Basic is not the same as BBC Basic, no matter how compatible the file structures are.

Reed about it

I HAVE a BBC B and have read every issue of *The Micro User* during the last 12 months, but I can't recall any article dealing with how to use the user port.

To be more specific, I want to control some 5V relays which would switch on various devices — say lamps or motors. I've heard that it is wise to protect sensitive chips in the computer from back EMF using opto-isolators, yet I have never seen this form of protection in any of your project articles.

So could you please direct me to any back issues containing this information or any books you know of? — **M.A. Bridge, Warrington, Cheshire.**

● The user port has been covered many

times since March 1983. Opto-isolators were described in the September 1983 issue and the previous two months were devoted to the user port. Unfortunately Database Publications no longer sells these back issues, but you can often get hold of them through The Micro User classified advertisements or the inter-library loan service of your local library.

The January 1988 issue also had information about connecting up reed relays. However, note that there is an error in Figure II — in order to obtain full protection from back EMF, the anode of the diode should be connected to the collector of the transistor and not the base as shown.

Extra keys

COULD you please tell me if you have ever published a body building course covering an add-on numeric keyboard for the BBC Micro? If so which issue was it in? — **Brian Moulson, High Wycombe, Bucks.**

● Yes, it was in the July 1985 issue.

Double trouble

I HAVE an issue 4 BBC Model B 1.2 OS, fitted with Watford 1.53 DDFS, but I am unable to format discs in double density although the computer will read and write in that density.

There are no problems formatting in single density, but I found by pressing IC 87 formatting stopped. I changed both the IC and its socket, but this did not cure the fault.

I have had the disc interface for approximately five months now — it worked perfectly when I first bought it. Can you help me to pinpoint the cause of the fault? I have diagrams of the BBC Micro, and full workshop factsheets. — **C.I. Unwin, BFPO 28.**

● When you pressed on the chip you probably flexed the printed circuit board. This could do two things: Unseat the ICs from their sockets or open up tiny cracks in the printed circuit board tracks. However, as this pressure only causes faults and doesn't cure them it's not such a good indicator of what's going wrong.

You say it will not format in double density, but do not say what happens

when you try — this will give you a clue to the fault. If the system reads and writes double density data there is likely to be nothing wrong with the data separator and associated components.

The prime candidate is likely to be the disc controller chip. However, if you have facilities for testing, trace the signals from the disc controller chip — on the pins — to the place they are going to on the main board.

Look out for signals that are floating rather than being held at a firm logic level. You can do this by having a 3k pull-up and a 3k pull-down resistor connected to your oscilloscope probe.

Cheap circuits

I WORK in the maintenance engineering department of Ford's Halewood plant and recently my work has involved the design and installation of pneumatic logic systems.

Producing neat circuit diagrams with a pencil and ruler is a time-consuming and potentially frustrating process and I would much prefer to use a simple CAD package. I am aware of two products on the market which would perform the task — Pineapple's Diagram II and Technomatic's Novacad.

However, both of these products provide facilities which I will not need and for which I would prefer not to pay. They would also involve upgrading to disc and this, when added to the cost of the packages themselves, puts the expense out of my range.

My hardware consists of an issue 7 BBC B, Watford shadow ram, Watford rom board with 16k SWR and a Brother M-1009. — **Paul Downes, Anfield, Liverpool.**

● Look at this from the software producers' point of view: By including lots of features they increase the potential sales market and sell more. This allows them to offer the product at a lower price and be even more competitive.

A more restricted package would have a smaller market and so would have to sell for a higher price. Compared with equivalent packages on other micros, the ones you mention are cheap and you probably won't be able to do what you want for less.

Bits of bytes

I HAVE been trying to interface my BBC B to a RS232 dumb terminal and have managed to get transmission in both directions. The problem is that the

Turn to Page 64 ►

◀ From Page 63

codes from the terminal are the characters plus 128.

I have tried to change the BBC Micro to 7 bits but have not managed this. The terminal has a parity switch at the rear, with even, odd and none as the options – the none option is the best I have managed.

Also, I tried to write a piece of software to combat this using INSV – the insert to buffer vector – to intercept input from the RS423, and AND it with 127.

This does not work, as the operating system does not appear to indirect input from the RS423 through this vector. Please can you help me? – **Clint Redwood, Romiley, Stockport.**

● *The problem is that the ACIA chip that handles the serial input is reporting a parity error so the operating system is never putting the received data into the buffer. That is why your program appears not to work.*

The ACIA hardware has to be set up properly to receive the different data format. This can be done with a

**FX156,X,227 command, where X is not a variable, but a number corresponding to the data format you want. The following table will give you the value to use:*

X	Data	Parity	Stop bits
0	7	even	2
4	7	odd	2
8	7	even	1
12	7	odd	1
16	8	none	2
20	8	none	1
24	8	even	1
28	8	odd	1

Hot chips

I HAVE a BBC B with Solidisk sideways ram and DDFS. After 30 minutes of use programs including Commstar and Elite crash. In the latter, spurious lines start to appear on the screen, marks appear on the radar and I think additional ships are generated.

Neither a new PSU nor changing most of the chips have helped, and removing the sideways ram and putting a fan on

the board simply delays the occurrence. Switching the BBC Micro off and waiting 30 minutes clears the problem. Have you any ideas? – **Dr W.E.J. Leverton, Yelveton, Devon.**

● *Quite simply something is getting too hot. It is likely to be a chip that you haven't changed. However, rather than just carrying on swapping them try to find out which one is going wrong.*

One way to do this is to get a can of freezer from an electrical shop and when the computer hangs up try cooling chips until it comes back to life. By repeating the process several times make sure it is the frozen chip and not just the overall temperature reduction around the area that is doing the trick.

Colour video

IS it at all possible to send a video signal (composite video) from a VCR to a Microvitec Cub RGB monitor. If so, how? – **Mark Barrow, via Prestel.**

● *The only way to get an RGB monitor to display a composite colour video signal*



Your technical questions
answered by MIKE COOK

PROBLEM SOLVED

is to get an adaptor that converts composite video into RGB. These can be obtained at a few specialist video suppliers and cost about £70.

Dead micro

THIS evening I left my BBC B switched on for between two and three hours. When I returned it had apparently frozen so I pressed Break. There was no start-up message so I switched it off, then on again. Out of the speaker came the continuous first note on the start-up tone and the screen was blank.

I hope you can help me — could you please bear in mind that I only have a small knowledge of the internal workings of a BBC Micro. — **Andrew French, Thornbury, Nr. Bristol.**

● There is no harm in leaving your micro on for long periods — sometimes I leave mine switched on for several days when using long running programs. However, what you have is a dead computer: The problem could be anything from an ill-fitting connector to a damaged chip.

For a start, take the lid off and make

sure all chips are pushed home and also check the cable that connects the keyboard to the main circuit board — that often comes loose.

Other than that, without test equipment it is impossible to say what is wrong so, unfortunately, your only recourse is to take it for repair.

Graphic typewriter

I OWN a BBC B and recently bought an Olympia Carrera electric typewriter. Unknown to me they can be used together so I purchased the appropriate interface box and leads and turned the typewriter into a printer.

There is now just one problem: I would

like — if possible — to produce graphics on the typewriter and would like to know if there is any way this could be achieved.

I realise that the daisywheel can only produce letters or numbers but I have heard of such things as type cartridges and typefaces. Is it possible to produce graphics with these? — **Paul Winn, Taunton, Somerset.**

● You can get extra typefaces for most printers of this type but, unfortunately, the number of individual characters is limited to just over 100.

If you consider a typical dot matrix character as consisting of an eight by eight matrix you will see it consists of 64 individual dots.

This gives a staggering 1.8×10^{19} different pattern combinations possible. You can see that it is impossible to mimic anything like that.

However, you could write some software to give a graphics-like output by selecting characters based on their density. For example, for a bright pixel you choose a low-density character like a full stop. Similarly for darker pixels you choose a dense character like an asterisk.

WATCHING YOUR BBC PROGRAMS ON TAXAN'S SUPERVISION 620 OR 625 IS A FEAST FOR THE EYES. BECAUSE THEY'RE PROFESSIONAL COLOUR MONITORS THEY GIVE YOU A BETTER QUALITY PICTURE THAN EITHER A TV OR MEDIUM RESOLUTION MONITOR. AND WITH THEIR SUPER HIGH CONTRAST TUBES (FOR SHARPER TEXT AND MORE VIVID COLOURS) AND FOUR SWITCHABLE COLOUR TEXT MODES, THEY MAKE EXCELLENT VIEWING. (HOWEVER IF YOU PREFER TO WATCH IN MONOCHROME ONLY, TAXAN HAVE A RANGE OF MONITORS - THE KX117, KX118 AND KX119). TAXAN ALSO OFFER TWO BBC COMPATIBLE DOT MATRIX PRINTERS, THE KP815 AND KP915. THEY'RE QUICK AND QUIET AND BOTH PROVIDE NEAR LETTER QUALITY. SO NOW YOU'VE SEEN OUR IMPROVEMENTS FOR THE BBC,™ GIVE US A RING. WE'D LOVE TO HEAR YOUR POINTS OF VIEW.

TAXAN
A KAGA COMPANY
PERFECTING THE IMAGE



TO FIND OUT MORE ABOUT THE TAXAN RANGE OF PRODUCTS, CALL US ON 0344 484646.

Use **TELECOM GOLD**
FREE* for a month!

Joining the communications revolution has never been easier

**All you need to link your
BBC Micro to the exciting
world outside is a phone
– and the MicroLink
Communications Pack**



* This exclusive offer relates to connect time only and does not include telephone, any possible PSS charges or surcharged services.

The MicroLink Communications Pack contains everything you require to go on line. There's a powerful modem that sits between your BBC Micro and your telephone, a lead to connect them together and easy-to-use communications software.

You'll also be given a unique invitation to join MicroLink, with FREE registration and telex validation (normally costing £15), and a month's FREE* connect-time to your MicroLink/Telecom Gold mailbox. So you can find out for yourself what MicroLink is all about without it costing you a penny.

Of course you can also use your MicroLink modem and software to access thousands of other services all over the world, from giant databases in the USA to innumerable privately-operated bulletin boards throughout Britain that cover a vast range of subjects.

To take advantage of this very special package deal simply complete and mail the coupon opposite.


There are two options you can choose from:


MicroLink dual-speed modem: This stylish modem works at two speeds – 1200/75 and 300/300. Fully BABT approved, it satisfies most users' requirements for a modest price.

£99
incl. VAT

MicroLink multi-speed modem: This offers the additional speed of 1200/1200 full duplex for users who want super-fast two-way transmission. Fully Hayes-compatible, it has many extra features, including powerful auto-dial and auto-answer facilities. A remarkable price breakthrough for a really exceptional product.

£169
incl. VAT

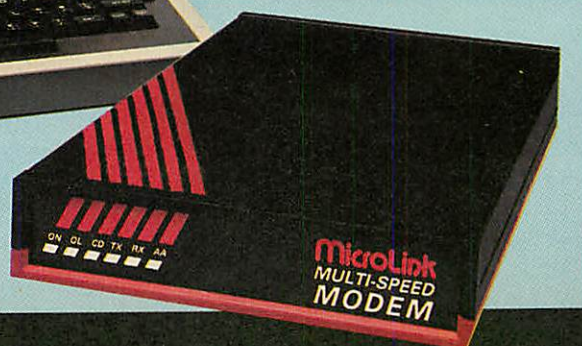

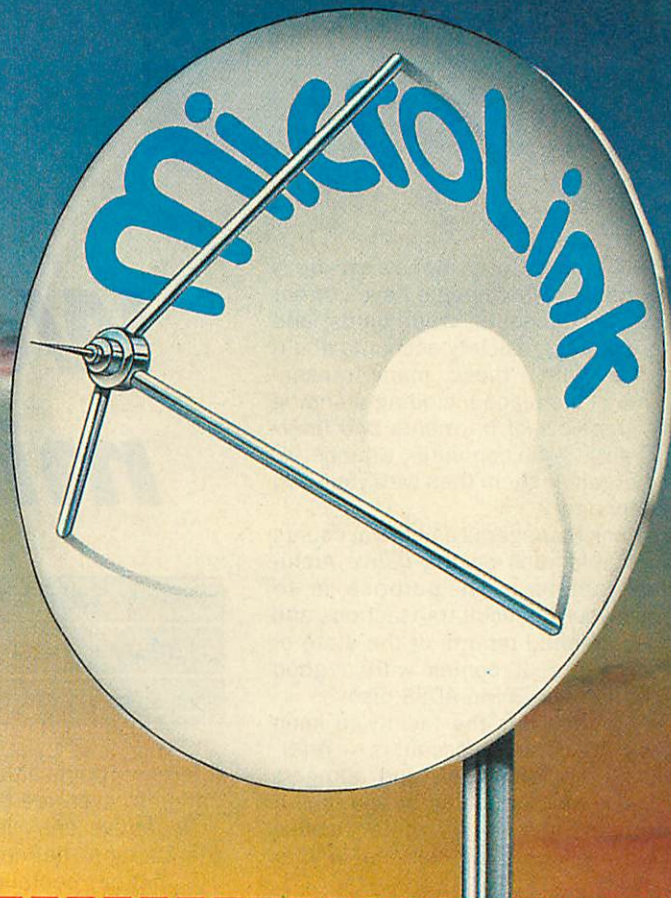

MicroLink is Britain's fastest-growing electronic mail service. It offers ALL the services of Telecom Gold – and a whole lot more besides.

With MicroLink you can link up with other users all over the world to send and receive electronic mail. It turns your BBC into a telex machine – without the need for expensive equipment or special phone line. It lets you send telemessages for next-morning delivery to ANY home or business in the UK or USA.

With MicroLink you can tap into a weather satellite and see pictures from space displayed in colour on your BBC monitor. You can use it to obtain legal and financial advice, to order flowers or book theatre and rail tickets.

With MicroLink you can receive free telesoftware programs over the phone to feed into your BBC. You can use it to turn text into typesetting or Braille. You can link in seconds to a database in New York, or key into the 400,000-word Great European Dictionary in Luxembourg. And it gives you direct access to up-to-the-minute financial information on every company in Britain.

The communications software that comes free with each modem is the complete Comms module from the acclaimed Mini Office Professional suite. This very latest package includes many unique features requiring only a single key press. It contains a built-in text editor for preparing messages offline, and supports error-checking protocols Xmodem and Kermit. It also allows you to control a similarly-equipped remote PC and directly access its files over the phone.

ORDER FORM

PLEASE SUPPLY:

- ☐ MicroLink dual-speed modem, software and BBC lead for £99
- ☐ MicroLink multi-speed modem, software and BBC lead for £169
- ☐ FREE registration and telex validation, plus FREE one month's connect time to MicroLink or
- ☐ I am already a subscriber to MicroLink

Software only available on disc for BBC B and Master

If you would like to join MicroLink and already have a modem and software simply tick the box alongside. You will then be sent full details of how to join. ☐

☐ Cheque enclosed made payable to MicroLink Communications Ltd

☐ Please debit my Access/Visa card number:

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Signature Expiry date / /

Name

Address

..... Postcode

Daytime phone

Send to: MicroLink Communications Ltd, FREEPOST, Europa House, Adlington Park, Adlington, Macclesfield SK10 5NP.

Telephone orders: 0625 879940


Orders by Prestel: Key *89, then 614568383

Via MicroLink/Telecom Gold: 72:MAG001

Allow 28 days for delivery.

A276

All prices include VAT & carriage (UK only).

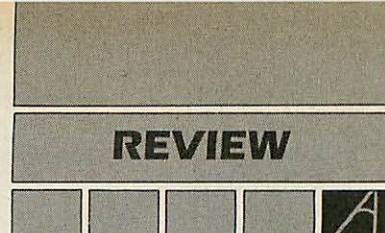

KEEPING tabs on your money can be a burden today: Most people have current and deposit accounts, credit cards, one or more building society accounts and a mortgage. Within these, many transactions may take place including standing orders, receipts of payments and interest. If you've got a computer, what better way to organise them than with your own Bank Manager?

The Bank Manager is a home accounts program that runs on the native Archimedes computer. Its purpose is to organise your financial transactions and produce detailed reports of the state of your accounts. It comes with a good manual and one 3.5in ADFS disc.

The program has the facility to keep tabs on 36 different accounts – referenced by the letters A-Z and numbers 0-9. These are nominated by you, and it is best to use meaningful references like L for Lloyds, A for Abbey National or V for Visa.

In addition, there is the facility to nominate analysis codes – up to 99 – for items we need to budget for, such as electricity, gas, clothes, car and so on.

These codes can be used very effectively to see what has been spent over any period – from 1 to 365 days – and how it compares with your intended budget.

A single posting can have a split analysis – one cheque to pay two bills – and double-sided single entry is catered for – you can debit your bank account to pay a credit card account. A nice touch is the facility to have accounts in foreign currencies and to translate to sterling during reports.

Standing orders can be actioned for any account, and once entered can be forgotten, as the program will automatically post these as transactions when it is run. The Archimedes' clock/calendar is used to good effect – the date is important to the program as a

Worth that million yet?

**Andy Smith tries out
a home banking system
and is impressed**

reference point although you have the option to over-ride the system date.

Repetitive entry is made easier with the ability to define function keys 1 to 10. They can contain any string and control characters may be used as usual, for example I M to represent a Return.

There is a utility called Report Writer which enables you to use a previously defined and saved command file for printing out information from the master accounts. This file is composed of a small vocabulary of commands which may be abbreviated – see Table I.

If you use it correctly your data should remain safe, and backups should be taken regularly. However, in a far from perfect world, there may come a time when your files have not been closed properly or you have exited the program in an incorrect way – thanks to a power cut for example. This instance has been catered for in a routine that will attempt to salvage a bad file.

Access to the main part of the program is password-protected to stop uninvited eyes seeing a complete record of your financial affairs.

Bank Manager will run using a single

disc for program and data, but any drive can be nominated as the data drive, and a separate data disc will allow more transactions to be recorded for a given period.

The menus all use the Archimedes simulated Mode 7 to good effect, with clear instructions and logical choices for colour monitors. But anyone with a monochrome monitor will find the program almost impossible to use because of the colour combinations – it would help to have a choice of configuration.

Statistical analysis is shown using an 80 column screen which makes the presentation of figures a lot easier to look at. Most reports give the option to print or view and if you choose the latter, you still get the option to print out afterwards if required.

A readme file on the disc gives very detailed instructions on the enhancements available with the Archimedes version and explains that more 80 column screens will be introduced to the program as it evolves. Context offers very reasonably priced upgrades for existing owners and also a service to change data from DFS to ADFS 800k format for BBC B owners upgrading to the new machine.

The program does its job well, in a clear and concise manner, comes with a good comprehensive manual and is easy to use. If you're after a program to keep track of your finances you'll find this one ideal.



Product: The Bank Manager.
Price: £25
Supplier: Context Computing, 15
Woodlands Close, Cople, Bedford MK44
3UE.
Tel: 02303 347

HEADING	<string>	Define page heading
EJECT		Throw a page
TOTAL		Display total of field
DATE		Display current date
ANALYSIS		Print histogram
*string		Send command to operating system
CONTROL	n n n ...	Send command to printer

Table I: Some of the Report Writer commands

Another Sensational Offer from Copper Mill Computers

INTRODUCING OUR NEW 20MB WINCHESTER DISC DRIVE SYSTEM FOR THE ACORN BBC B/B+ AND MASTER

20 MEGABYTES OF MEMORY FROM ONLY £447.50



Comes complete with:

- * 1m cable to 1MHz bus + through socket
- * User manual
- * Utilities disc (FORMAT, VERIFY, DIAGNOSTICS)
- * 12 Month Warranty
- * Acorn ADFS (essential for "B" and "B+")

OUR NEW WINCHESTER COMES AS A COMPLETE PACKAGE. NO HIDDEN EXTRAS!

Attractively packaged our system is totally compatible with the Acorn ADFS and associated software. Our manual covers operation and use of the available high speed memory. This whole system is manufactured in our own factory where we have gained great experience in the service and repair of virtually all types of disc drive, thus you can be well assured should you require any service backup.

Please send cheque/P.O./Access or Visa to:
Copper Mill Computers, Unit 13, 193 Garth Road, Morden,
Surrey. SM4 4LZ.

*Enclose: For Master: £447.50.

For "B" and "B+": £475.00 (inc ADFS ROM)

Price inc VAT and next day delivery.

Please write or call us on 01-330 4838, for further details.
Official orders from Educational Government Dept's welcome.

NEW LINES FROM COPPER MILL COMPUTERS AT BARGAIN PRICES

BARCO 26" COLOUR MONITORS

Ideal in situations where single or multiple screens are required for use as class/lecture theatre demonstration display units. Also may be used as screen only for television/video use. BNC type composite video in/out sockets. A quality PAL colour monitor for only . . .

£287.50 INC. CARRIAGE

MANUALS

Twin Volume Export BBC 'B' manuals covering DFS, Speech and VIEW. A very comprehensive set of manuals.

£20.00 (no VAT)

CASED-UP FLOPPY DISC DRIVES WITH POWER SUPPLY

Single 40-Track Double Sided	£92.00
Single 80-Track Double Sided	£94.30
Single 40/80 Track Switchable Double Sided for BBC	£101.20

WINCHESTER UPGRADE KITS FOR IBM PC & CLONES (inc. cables)

20 Megabyte	£281.75
30 Megabyte	£368.00
40 Megabyte	£454.25

HOBBYISTS CORNER

FLOPPY DISC DRIVE CHASSIS

Top quality units from Teac, Mitsubishi, etc. All drives are single/double density.

40 Track Double Sided (180K/360K)	£69.00
80 Track Double Sided (360K/720K)	£71.30
40/80 Track with face plate mounted switch	£78.20
(Ideal for BBC)	

WINCHESTER DISC DRIVES

10 Megabyte Half Height	£143.75
20 Megabyte Half Height	£201.25
20 Megabyte Half Height with SASI Interface	£212.75
30 Megabyte Full Height	£287.50
40 Megabyte Full Height	£373.75

WINCHESTER ADAPTOR FOR BBC 1MHz BUS.

Bare Circuit Board	£17.25
Populated Circuit Board	£40.25
Populated Circuit Board c/w instructions and software to assemble BBC Winchester Subsystem	£57.50
N.B. Details of Winchester Subsystem for Atari available soon	

CONTROLLER CARDS FOR WINCHESTERS

IM PC Bus Type:	
Western Digital WD1002	£74.75
Xebec 1210	£63.25
ST 506 to SASI Type:	
DTC 510A/510B	£86.25
XEBEC 1410/1410A	£143.75

ALL OUR PRICES INCLUDE VAT AT 15%
Postage and Packing as follows: Disc Drives-£4.00; Cards and Manuals-£2.00.
Please ring for quote on quantity purchase
All our goods are covered by a 12 month warranty (excluding P&P) except where specified



COMPUTER

EXPRESS

"HISSTERICALLY LOW PRICES"

ESTABLISHED 1979

The leading mail order computer firm in the UK

OVER £1 MILLION OF STOCK
Rapid despatch of all popular items

SHOWROOM & SHOP

Friendly personal service and sales advice

TECHNICAL & HOT LINE SUPPORT

Don't worry - if you bought it from us we're happy to help

M25 AREA SPECIAL SERVICE

ON-SITE MAINTENANCE CONTRACTS

INSTALLATION AND TRAINING

NETWORKING

ALL GOODS GUARANTEED

NARROW DOT MATRIX PRINTERS

Epson LX800 - The Brand New Best Seller!	£179
Star LC10 (including interface) The New Number 2	£189
Panasonic 1081 - 120cps & 80 col - A Winner!	£142
Epson FX800 - Brand New! 240cps! Wow!	£294
Epson EX800 - 300cps & 80 column-Super Fast!	£372
Seikosha MP1300AI - 300cps!	£299
Seikosha SP1800 - 100cps Bus a Great Price!	£149
Seikosha SP1200 - 120cps (Seiko-Epson owns Seikosha)	£189
MP 165 - Cheap Fast And Good Quality! 180cps	£169
Oki Microline 182 - The Number 2 Brand	£185
Oki Microline 192 - Perennial Favourite	£280

WIDE DOT MATRIX PRINTERS

Star NX15 - The New Wide-body NL10!	£270
Star NR15 - Replaces the SR15-A Great Mover	£395
Panasonic 1592P - A Real Bargain, Mate!	£330
Panasonic 1595 - The Panasonic Favorite	£448
Epson FX1000 - A Very Popular Selection	£380
Epson EX1000 - 250cps & 136 column-Super Fast!	£509
Seikosha MP5300AI - 132col Version of MP1300	£389
Seikosha BP5420 - 420cps Draft - 106 in NLO	£999
MP 200 - 200cps! 132 column!	£233
MP 201 - 132 column 200cps	£272
NEC P101 - 132 column 200cps	£357
Oki Microline 193 - Worth A Look	£608

24-PIN DOT MATRIX PRINTERS

Epson LQ2500 - This one is really good!	£699
Epson LQ850 - Brand New 24-Pin, Due Out Soon	£429
Epson LQ1050 - Brand New 132 Column 24-Pin LQ	£589
Seikosha SL80 - 150cps Draft - 50cps LQ	£280
Star NB15 - The big, up-market Star 24-pin 300cps	£619
Star NB24-15 - Similar to above, but 216cps	£517
Star NB24-10 - 80 column 24-pin winner	£410
NEC P6 - Good Buy	£375
NEC P7 - One of the Best Sellers Ever - 24 pin	£441
NEC P220 new! 56 cps in 24 pin LQ mode	£339
Cut Sheet Feed	£65

DAISY WHEEL PRINTERS

Juki 6100 - 20cps - Very Popular, still no. 1	£265
Juki 6200 - 30cps - Still Popular	£393
Panasonic KXP-3131 - 18cps - Cute & a Good Smile!	£233

COLOUR AND INK JET PRINTERS

Okimate 20 Thermal Printer	£159
Juki 5520 - The Market Leader - Fast!	£335
Epson EX-Series Colour Option	£55
NEC P565XL - Heavy-Duty Office Favorite!	£745
Epson LQ2500 Colour Unit/Makes LQ2500 Colour	£55
Seikosha MP1300 Colour Kit/Makes MP1300 Colour	£87
Epson SQ2500 - Ink your jet with this one!	£983

PLOTTERS, DIGITIZERS & LASERS

HP LaserJet II - Newer, Better, Cheaper!	£1935
Cherry A3 Digitizer Tablet	£454
Roland DXY-880A Plotter - Best Value A3 Plotter	£539
Roland DXY-990A Plotter	£859
Roland DXP-2200 A2 Flat-Bed Plotter	£2800
Epson GQ3500 - Brand new with free HP Emulation!	£1275

RIBBONS

Epson FX80/85/800/LX800 (also MP165, Juki 5510)	£4.75 each
Longbow FX80/85/800/LX800 compatible ribbon	£2.80 each
Epson EX-series cartridge ribbon	£7.51 each
Longbow Oki 182/192/193 compatible ribbon	£4.61 each
Longbow NEC P3-P7 black compatible ribbon	£4.85 each
NEC P-6 black ribbon	£7.88 each
Longbow Panasonic 1080-1081 compatible ribbon	£3.18 each
Star NL10 cartridge ribbon	£4.66 each
Longbow LQ800 compatible ribbon	£2.99 each

CABLES AND THINGS

IBM-Compatible Centronics Parallel Cable (Round)	£13.50
BBC Centronics Parallel Cable (Ribbon)	£8
Two-Way Printer T-Switch	£29
80 Col Printer Stands	£21
SpaceBase Adjustable Floor-Standing Printer Stand	£83

AMSTRAD PC

Amstrad Portable PPC - Brand New Winner!	call
Amstrad 1512 Single Floppy/Mono Monitor	£385
Amstrad 1512 Double Floppy/Mono Monitor	£489
Amstrad 1640 Single Floppy (Colour Monitor 640k)	£610
Amstrad 1640 Double Floppy (Colour Monitor 640k)	£699
Amstrad 1640 20mb Hard Disk (Colour Monitor 640k)	£949
Amstrad 1640 Single Floppy ECD (EGA Colour 640k)	£749
Amstrad 1640 Double Floppy ECD (EGA Colour 640k)	£799
Amstrad 1640 20mb Hard Disk ECD (EGA Colour 640k)	£1099
Amstrad 1640 Single Floppy (Mono Monitor 640k)	£465
Amstrad 1640 Double Floppy (Mono Monitor 640k)	£560
Amstrad 1640 20mb Hard Disk (Mono Monitor 640k)	£840

EXPRESS & MACDOUGALL PC's

Express PC-88 32mb Hard Disk (640k, Turbo, mono monitor)	£799
Express PC-88 Double Floppy (640k, Turbo, mono monitor)	£599
Express Mini AT 286 32mb Hard Disk (1mb RAM 6MHz, mono monitor)	£1159
Express AT 286 32mb Hard Disk (1mb RAM 6MHz, mono monitor)	£1199
Express Tower 386 (1.5mb RAM 16MHz, single 1.2mb floppy, MGA)	£1799
MacDougall 286 AT (512k 10mhz, 20mb HD, mono monitor)	£999

EPSON PC's

Epson PC AX-20 Mark II (640k RAM, 20mb HD & EGA)	£1259
Epson PC AX-40 AT (640k RAM, 1.2mb Floppy, 40mb HD)	£1629
Epson PCE (20mb XT with keyboard, DOS & mono monitor)	£925

TANDON

PCA 20mb Hard Disk AT (1mb RAM Keyboard DOS Monitor)	£1250
PCA 40mb Hard Disk AT (1mb RAM Keyboard DOS Monitor)	£1725
Target 20mb Mini AT (Complete mono system)	£1350
Target 40mb Mini AT (Complete mono system)	£1814
PAC-286 (complete EGA AT with removable 32mb hard disk)	£2050

OLIVETTI PC's

Olivetti M240 (20mb hard disk, Monitor, Keyboard, MS-DOS)	£1430
-----------------------------------------------------------	-------

SHARP PORTABLES

Sharp PC-7100 20mb Hard Super Twist Screen	£1399
Sharp PC-7200 20mb 80286 AT (Super Twist & Super Fast!)	£2099
Sharp PC-4501 Single 3.5in Floppy, 256k, Super Twist	£699
Sharp PC-4502 Twin 3.5in Floppies, 256k, Super Twist	£875
Sharp PC-4500 Series External 5.25in Disk Drive	£250

TOSHIBA

Toshiba T3100 20mb 80286 Portable	£2600
Toshiba T1100 Plus	£1359
Toshiba T1000	£810
Toshiba T1200	£2100

CAMBRIDGE COMPUTERS

Z88 - The True Portable! Clive Strikes Back!	£239
----------------------------------------------	------

MONITORS

Eizo ER8042H 14in Ultra-High Res EGA Colour Monitor	£336
ADI 14in Mono Monitor with Til/Swivel Stand	£120
NEC Multi-sync EGA monitor	£459

ATARI

Atari 520STFS 512k RAM, disk drive, mouse	£225
Atari 1040STF 1mb RAM, disk drive, mouse, no monitor	£380
Atari 1040STF with Mono Monitor, 1mb RAM, disk drive	£460
Atari 1040STF with Atari SC1224 Colour Monitor	£670
Atari Mega ST 2 with M125 Mono Monitor	£792
Supra 20mb External Hard Disk - It Auto Boots!	£478

ATARI TOP SELLING SOFTWARE

Cyber Studio Card 3D ver 2.0 - It's Super!	£64
Flight Simulator II - Very Realistic Best Seller	£36
VIP Professional - Lotus Clone Gem Version	£149
Metacomac Lattice C Compiler	£71
First Word Plus - Word Processor with Graphics	£56
Star Trek - Get It While You Can	£13
Sage Accountant Plus - Everything You Need	£169
Personal Personal - The Relational Database	£73
PC Dito - The IBM Emulator	£56
Easy Draw II - Great With DTP-Great With Monitor	£56
Mark Williams C Compiler - The Best in C	£69
TimeWorks Desk Top Publisher - The Ventura DTP Clone	£60

LARGE STOCKS OF ATARI SOFTWARE AT DISCOUNTED PRICES

CATS 'N' MICE

Mouse Systems Serial or Bus Mouse with Pop-Up Menus	£125
Microsoft Bus or Serial Mouse - Don't forget the cat!	£129
Logitech Logimouse Plus Package	£89

DISKETTES

Computer Express 5.25in DS/DD 48tpi disks	£1.00 each
Computer Express 5.25in DS/DD 96tpi Hi-Density	£1.85 each
Computer Express Branded 3.5in DS/DD diskettes	£1.99 each

COMMUNICATIONS

Linnet V21/V23 Autodial/Autanswer	£129
Miracle WS4000 V21-V23 Modem	£129
Miracle WS3000 V22 Professional Modem	£385
Sage Chitchat Comms Pack (Modem/Software/Cable)	£181
Crosstalk Mark IV Comms Software	£99
DataSoft DataTalk Software	£89
Sage Chitchat Comms Software	£69
One-To-One Electronic Mail Subscription	£20
RS232 serial modem cable	£15

HARD DISKS

Western Digital 32mb FileCard (with X-Tree software)	£239
Seagate ST225 20mb Hard Disk w/WD controller & cables	£225
Seagate ST358 30mb Hard Disk w/WD controller & cables	£249
Seagate ST251 40mb Hard Disk 40ms Access (Drive Only)	£350
Plus HardCard 20mb	£499
Plus HardCard 40mb (the quality leader)	£850
Newbury Data Full-Height 55mb Hard Disk (30ms)	£460
Newbury Data Full-Height 87mb Hard Disk (30ms)	£599

SPECIAL OFFERS

FX-85 Auto Sheet Feed	£99
FX-85 Tractor Feed	£49
LQ-1000 Tractor Feed	£49
Kaypro 2000 Base Unit (New)	£250
Quine Profinder (Wide)	£175
AT 3G EGA Card	£175
Olivetti MS-DOS 2.11	£15
Olivetti M28, M24 and M240 Keyboards and Monitors	call

ADD-ON BOARDS

AST SixPack Plus 64k memory Multifunction Card	£165
Quibie SixShooter Multifunction Card 384K RAM	£190
Intel AboveBoard with 64k installed	£199
Everex Mini Magic Ram Expansion Card (384K)	£117
Hercules Graphics/Graphics Plus Card	£179
Everex EverGraphics Plus (Clone Hercules Card)	£95
Eizo Auto-Switch EGA Card	£199
Paradise Auto-Switch EGA Card	£199
AST 3720 Terminal Emulation Card	£649
AST 5251 Model 12 Remote Emulation Card	£525
AST SixPack Premium EMS Multifunction 256k Clock Parallel & Serial	£330
AST SixPack Premium 1mb EMS daughter board	£150

NETWORKS

SageNet 2-User Network System	£275
Each additional SageNet User	£139
3Com Etherlink Network Card 3C501 (PC Net Bios)	£497

CHIPS, CO-PROCESSOR AND DRAM

64k dRAM chips (nine to make 64k)	£1.25 each
256k dRAM chips (nine to make 256k) 150 N.S.	£3.10 each
Intel 8087 5mhz Maths Co-Processor	£94
Intel 8087-2 Bmz Maths Co-Processor	£132
Intel 80287-8 Maths Co-Processor	£185

IBM-COMPATIBLE SOFTWARE

PC-MOS by Software Link - The MS-DOS Challenge!	£175
WordStar 2000 Plus release 2	£228
WordStar 3.4	£144
WordStar Professional Version 4	£193
Word Perfect ver 4.2 - The Number 1 WP Package	£219
Microsoft Word ver 3 - Number 2 WP Package	£249
Multimate ver 3.31	£189
Multimate Advantage II	£275
Lotus Manuscript - Latest Blockbuster WP Package!	£233
PPS - First Choice	£75
PPS - Professional Write	£120
Framework II Version 1.1	£311
Symphony version 1.2 (Latest Version)	£318
Symphony Spelling Checker	£69
Symphony Text Outliner	£60
Lotus 1-2-3 ver 2.1 Top Selling Package In The World	£218
Lotus Spotlight - The desktop manager!	£39
Lotus Metro - Lotus front-end organiser!	£53
Lotus Report Writer - A must for Lotus fans!	£75
Supercalc ver 4 - The Celebrated Lotus-Beater!	£189
Borland Quattro - Brand New!	£129
Grafax Logistics	£79
Javelin Plus	£175
Smart System - The Best Integrated Package	£359
Executive Systems X-Tree (Super Friendly HD Organizer)	£42
Executive Systems Hot! - Make own menus and hot keys!	£36
Rosetop Prokey - Upgrade your keyboard	£55
Word Perfect Library - The Word Perfect Front End	£199
Pegasus Accounts (per Module)	£19
Account Check - You too can play like Gary Kasparov	£19
Quid Software Copywrite (Gives You a Lift!)	£42
Microsoft Flight Simulator - Back Up a Lift!	£39
Microsoft Quick Basic version 3 - The Ultimate Basic	£53
Funk Software Sideways	£47
Borland Turbo Lightening	£47
Microsoft Windows	£56
Norton Utilities 4 - Every user needs this one!	£51
Norton Commander - Control program for power users!	£35
Ventura Desk Top Publisher	£469
Freelance Plus	£264
Delta Professional	£319
Ansa Paradox II - Multi-User Database!	£289
Cardbox Plus	£225
Ashton-Tate Rapid File	£199
dBase III Plus - Best Selling Professional Database	£359
FoxBase Plus	£269

LOW-COST SOFTWARE

VP Planner by Paperback Software - Best Seller!	£61
VP Info (dBase II Clone)	£62
VP Expert	£75
VP Graphics	£65
Borland Sidekick - The Original Co-Resident Process!	£43
Borland Turbo C - C How You Like This!	£55
Borland Turbo Pascal - The Classic Borland Product	£47
Borland Turbo Basic	£47
Sage Bookkeeper - New version!	£69
Sage Retrieve Database	£71
Sage PC Planner Spreadsheet (Lotus Clone)	£69
Sage Desk-Set	£49
Sage PC-Write Word Processor	£69
Sage Accountant - For the Small Business	£135
Sage Accountant Plus - Top Selling Cheap Accounts	£135
Sage Payroll - A Fun Event Computerised	£69
Sage Financial Controller - The Sage Top of the Range!	£205
Sage PC Chart	£69
Personal Word Perfect	£125
Word Perfect Junior	£85
Microsoft Word Junior	£45
WordStar 1512	£45
Amstrad Multiplan Junior	£59
Amstrad Supercalc 3	£60
Amstrad Amstrad Reflex	£60
Migent Ability	£70
Migent Ability Plus - Spend a Little More, Mate!	£130
Words & Figures - Lotus 123 v1 Clone with WP	£80

Official Purchase orders accepted from Government, Local Authorities, Universities and PLC's. Others with prior approval only. All prices exclusive of VAT and subject to availability and change without notice. Delivery charges extra. All items guaranteed. No returns or repairs accepted without a Returns Authorization Number obtainable from our Technical Support Department. Defective dead on arrival (within 28 days from purchase) merchandise repaired or replaced immediately at our carriage expense. Carriage on warranty repairs is paid by the customer. Non-defective credit returns subject to a 10% restocking fee.

All correspondence to head office.

Showroom/shop: Monday-Friday 9am to 6pm, Saturday 10am to 5pm, Technical/Hot Line support: Monday-Friday 9am to 1pm, 2pm to 5.30pm, Telephone orders: Monday-Friday 9am to 5.30pm.

FOR FULL PRICE LIST PLEASE CALL
EXPORT & TRADE ENQUIRIES WELCOME
TELEPHONE & MAIL ORDERS WELCOME



0727-37451



MICRO-COMPUTERS, PERIPHERALS
SOFTWARE SALES & SUPPORT
CREDIT CARDS NOT DEBITED UNTIL DESPATCH

SHOWROOM-99 PARK STREET LANE-BRICKETWOOD-ST ALBANS-HERTFORDSHIRE-AL2 2JA-(0727) 72790
HEAD OFFICE-UNIT A-CAXTON CENTRE-PORTERS WOOD-ST ALBANS-HERTFORDSHIRE-AL3 6XT-(0727) 37451
TELEX: 8980511 ONE ONE G (Quote Ref: 15412001)

COMPUTER EXPRESS HOLLAND-NIJVERHEIDSWEG-N60-3812 PM-AMERSFOORT-NETHERLANDS-(33) 630544
COMPUTER EXPRESS AMERICA-1713 S.E. ELLIS STREET-PORTLAND-OR-97202 USA-TELEPHONE (503) 235 0277

Biting the baud

MENTION communications to most computer users and they immediately think of a micro and modem plugged into a telephone circuit.

But what about plugging one computer into another? Before we take the quantum leap of plugging a BBC Micro into an Acorn Archimedes (assuming you've just upgraded), let's look at the theory behind the practice.

The printed text you're reading on this page originates — believe it or not — from a Z88 micro being used on an Intercity 125. As text is entered into the computer it's represented by bytes of data held in the machine's ram.

We know that this data can be saved to tape or disc by sequentially recording — that is, saving each data bit one after the other — on to the magnetic medium concerned. Replaying the tape or disc results in the data bitstream being pumped — one bit at a time — back into the micro's memory.

Fine so far. But, what happens when we attempt to replay our tape or disc into another machine? Providing it's another BBC Micro — or even an Electron — it will load and, subject to hardware limitations, run.

But what if the other micro is a Commodore 64? Unless you've done some nifty programming, the chances are that your efforts will be in vain. So what went wrong?

For theoretical purposes, let's look at a project involving linking a BBC B to an Archimedes. We know that, courtesy of Acorn's excellent design team, it is capable of reading programs and data saved from another Acorn micro. If we're really lucky, the played-back program might even run!

But hold on a minute. The Archimedes has no tape port, and its disc system is different from the BBC B's. How can we move 8 bit data between the two machines?

As with most solutions in the communications vein, the answer is to link the two machine's serial ports. Figure 1 details the exact connections, from which we see that they differ

Steve Gold explains how data can be transferred between various micros

radically from those linking a BBC Micro (or an Archimedes for that matter) to a normal modem.

The cable involved is called a null modem and — broadly speaking — each end of the link is a mirror image of the other end. Null modems are extremely easy to make and most good computer dealers will make one up for you on request.

So we've linked up our BBC Micro and Archimedes' serial ports. What now? If the file to transfer between the two machines was short and simple, we could open a channel from the BBC Micro's keyboard or disc drive and pipe data through the RS423. At the other end, data could be read in from the Archimedes' serial port and saved directly to disc.

Ah, if things were that simple. There are, as many Archimedes owners will already know, a number of documented bugs in the Archimedes hardware — at least two involving the handshaking (the ability to handle data interchange) on the Archimedes' RS232 port. The problem usually manifests itself with the Archimedes being unable to cope with large quantities of data coming in at high

Xmodem to the rescue

The solution to our problem lies in an error-checked method of file transfer. All error-checked file transfer protocols involve splitting up the data to be sent into several small blocks of bytes. The pure numeric value of each block is calculated by addition and a checksum figure appended to it.

As each block is sent over a data link, it is stored temporarily and the

checksum calculated. If this agrees with the figure appended to the block, all is presumed well and the data may be saved to tape, disc or used immediately.

Checksumming data to verify its integrity was used on the earliest computers when data was saved to tape or magnetic wire (discs were not invented in those days). It took until the late 1960s, however, before the idea of checksumming was applied to data sent over a modem and/or serial link.

The most popular error-checking file transfer protocol used in communications today is the Christenson protocol, named after its inventor Ward Christenson. Nowadays, most people refer to it under one of its generic titles — Xmodem, Modem7 or CP/M protocols.

Most users of Acorn micros tend to use the term Xmodem when talking about the Christenson protocol, so we'll do likewise. Under Xmodem, each block of data is 128 bytes long and the checksum value is calculated by adding together the Ascii values of the bytes in the block.

Other file transfer protocols

Xmodem is a very simple principle and very easy — if somewhat lengthy — procedure to implement from BBC Basic. Most communications programs available today have Xmodem in their list of available file transfer protocols.

As the mathematicians among *The Micro User* readership will probably have realised, Xmodem uses a relatively crude checksumming system on its 128 byte blocks. Two or more bursts of extraneous noise on the circuit over which data is being transmitted can result in checksum errors which cancel each other out. This cancelling out is known as a compensating error situation.

For our simple serial port link, Xmodem is very unlikely to encounter any direct data errors which could be caused by external electrical and/or magnetic fields, so it is suitable.

Over a modem link however, the possibility of compensating checksum errors increases so, programming nature being what it is, many Xmodem users have chosen to modify Ward Christenson's protocol and even write their own error-checking protocol.

Variants on the theme are many, and include such names as Ymodem, Zmodem, Compuserve A, Compuserve B, Tlink, Sealink, Telink and Vlink, to

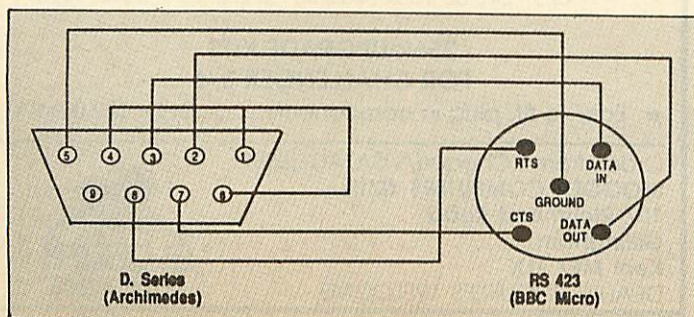


Figure 11: BBC Micro RS423 to Archimedes RS232

Turn to Page 72 ►

FEATURE

◀ From Page 71

mention but a few. For most practical purposes however, Xmodem and its forerunner — which was called Kermit — should suffice to service most communications users' needs.

The latest versions of Kermit — known as SuperKermit — implements features such as variable-size data blocks and sliding window techniques.

The latter has nothing to do with those used in a desktop programming environment. The term refers to a variable-size data window which allows the block sender to *send ahead* a number of blocks, while the distant computer is calculating the checksums on its received data.

If a bad block — one on which the checksum does not agree — is received at the distant end, sliding window Kermit allows the sending computer to slot in a re-send of the bad block at pre-determined points in the data transmission.

But back to our BBC Micro-to-Archimedes link. If a communications program is installed on both machines, and a null modem cable is connected between the serial ports, communi-

cations can quickly be established. Once a direct keyboard to keyboard link is achieved, both micros can switch into send and receive modes respectively.

For our application both machines will probably be in the same room, but for all practical purposes they can be as far apart as electrically possible. In the case of our BBC Micro-Archimedes link the limit is about 50 feet, as imposed by the BBC Micro's RS423 line voltage.

As a slight digression, a friend of mine linked two BBC Bs at each end of his house by slinging an RS232 cable over the roof. Since each room was on the ground floor and the house was three storeys high, the link was almost 150 feet.

Amazingly, it worked at 9600 baud (9600 bits per second) on the day, although the next morning it failed to work faster than 4800 baud.

The reason for this was that, overnight, temperatures dropped below freezing, cooling the cable considerably. As the temperature fell the impedance increased and the line voltage — and current — dropped. On a cold morning the cable did not conduct the serial output signal as well as it did the evening before.

That just about concludes our practi-

cal application and explanation of error-correcting protocols for this month, but before I leave you — and you turn the page — a few hints and tips:

● When linking two devices by their serial ports, it is perfectly possible for what is known as garbage characters to appear on the screen in place of a the Ascii characters sent. If this happens when linking your BBC Micro to an Archimedes, it does at least mean that an electrical link has been established between the two machines.

If the garbage characters received are substantially more than the number sent by the other machine, it almost certainly means the receiving station is set to a lower baud rate than the sending station.

Conversely, if the number of garbage characters received is less than those sent, the receiving station is probably set to too high a baud rate.

If baud rates are equal between the two machines, you should check the parity. Most inter-computer links work best using an 8 bit, no parity, one stop bit (8-N-1) data transfer rate. Avoid using seven bits if possible, as this can cause problems when moving 8 bit files between the two machines.

ADVANCED STATISTICAL SYSTEM For BBC Models B, B+, Master 128 and Archimedes FIRST

Standard, Professional and Academic Features

Fast, robust, accurate, interactive, modular. Full data management, Transforms, dummy variables, data subsets. Scatter & Normal prob. plots. Detailed Univariate Stats, t tests.

Unrivalled regression facilities

(Weighted, through the origin, standardised). Correlation matrix, ANOVA for regression, Residuals, fitted values & confidence intervals. Contour plots from regression, Advanced regression DIAGNOSTICS, VIF's, influential points etc.

Unique ROBUST regression. True NONLINEAR regression

Two and Three-way ANOVA. Cluster analysis. Time Series & smoothing. Nonparametric methods. Distribution generators, Histograms. Chi-squared tests. Specialised Linear Calibration. "Outlier" detection. Numerous other powerful options.

Full utilities (data saving, dumps, printing, formatting, etc.)

Comprehensive Manual—full User Support

Special versions available for 32016 Co-processor and ACW.

Price £90—£150 depending on features.

Versions for Industry Standard PC's

Full details from:

SERIOUS STATISTICAL SOFTWARE

Lynwood, Benty Heath Lane, Willaston, S. Wirral L64 1SD. Tel: 051-327 4268

MICROLEDGER

A high quality general ledger package designed by a Chartered Accountant for maximum versatility and ease of use. Ideal for small businesses, clubs, schools etc., as well as for home accounts. Runs on all BBC micros with 32k RAM or more. Features include:

- ★ "Double-entry" accounting.
- ★ Up to 99 general ledger accounts: all account names user-specified—can include VAT and sales/purchase ledger accounts.
- ★ Up to 500 transactions per accounting period.
- ★ Excellent budgeting facility.
- ★ Reports include Income & Expenditure Account, Balance Sheet, Funds Flow Statement. Current period and year-to-date reporting with actual/budget comparisons. Full audit trail.
- ★ Consolidation of two or more separate ledgers.
- ★ Menu-driven with full prompt messages.
- ★ Comprehensive, 30 page manual.

MicroLedger is supplied on 40 track 5.25" disk or on tape cassette for conversion to other disk media. Unrivalled value at £16.50 (incl. p&p) for disk or tape—specify which is required. Send cheque with order to Ixchel Software, 16 Meredith Road, London SW13 0DY; or 'phone 01-876 9732 for a free fact sheet.

OPUS CHALLENGER MASTER ADFS

At last! Full Acorn ADFS compatibility for the OPUS
CHALLENGER 3

MASTER ADFS£34.95 inc VAT
(Challenger 512k only)

SLOGGER CHALLENGER 4 RAMdisc for the BBC MASTER

- ★ Fully Acorn ADFS compatible
- ★ Fully Acorn DFS compatible
- ★ Allows further expansion at rear
- ★ Internal Power supply unit
- ★ BBC versions available soon

256k	ADFS 40 track (160k)	
or	DFS 80 track (200k)	£99+VAT
512k	ADFS 80 track (320k)	
or	DFS 80 track (2x200k)	£129+VAT
768k	ADFS 80 track (640k)	
or	DFS 80 track (3x200k)	£159+VAT
1024k	ADFS 80 track (1x640k 1x320k)	
or	DFS 80 track (4x200k)	£189+VAT

256k UPGRADE KITS FOR CHALLENGER 3/4

★ Easy to fit, plug in components.....Only £29.00+VAT

Order from (Cheque/VISA/ACCESS)

SLOGGER COMPUTERS (MU)

107 Richmond Road

Gillingham

Kent ME7 1LX

DEALER ENQUIRIES WELCOME




THE MICRO USER

SPECIAL

REPTON



● The Repton shuggle was first needed for screen j of Repton 1. I can hold a rock on my head, but if I move down I get knocked out by the falling rock. But if I move to the left and then swiftly back to the right – or vice-versa – I can push the rock to the right-hand side before it falls any further. Here's a diagram of how it's done:

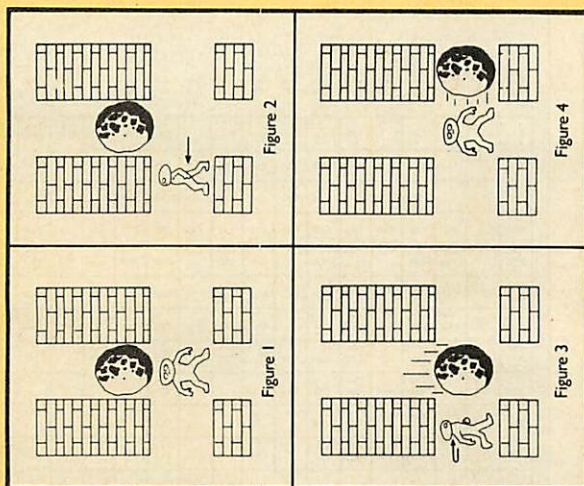

Fatal for spirits

I find it infuriating that spirits can sometimes get dazed and just go round and round in circles. Is there anything you can do about this if it happens? I am getting very frustrated. — **Dr. George Riley, Scunthorpe.**

● Please calm down – sometimes you can get a spirit moving by dropping another rock on it or allowing fungus to grow until it touches the spirit. However, this condition is usually fatal – but if you get the screen solution right this should never happen.

just yet but in some way or another this won't be the last you hear of me – Repton, the movie, perhaps? You'll have to wait and see. Anyway, I'm glad you had such a good time at your fancy dress competition and thanks for the letter.

Repton for Archie?

I'm considering buying an Archimedes but don't know how many games will be available. Could you let me know if any Repton games will be brought out for this fantastic machine? — **Mr. F. Johnson, Herts.**

● It's a possibility – but I'm not prepared to commit myself just yet. The Archimedes has caused quite a stir, and whether it's Repton games or not, Superior Software has promised to support it. You can't say fairer than that.

Master version

I have a Master 128 and am about to buy Life of Repton. Is there any difference between the BBC B and Master version? — **Mrs. D. Hopkins, Leeds.**

● The Master version is special because both the editor and the game load into memory on the Master, and you can flip between them by pressing the Break key – which saves a lot of time.

Repton shuffle

I bought Repton 3 more than six months ago and have spent many agonising – but enjoyable – hours trying to complete it. However, I've come a cropper and I just don't seem to be able to finish. Somebody has mentioned that I should do the Repton shuffle – I still haven't completed the game but I've been banned from the local nightclub. Please could you enlighten me? — **J. Stone, Sale.**

Hi! Repton here.

How are you, Reptonians? Recovered from last year's summer holiday Around the World yet? Come to think of it, it wasn't much of a holiday was it? I hardly had a moment to relax.

Which corner of the globe did you enjoy the most? The Arctic? Not for me, it's far too cold and those igloos don't have central heating, you know. I enjoy a warmer climate like Africa, but it plays havoc with my scales — I got a touch of sunburn out there and my scales started to peel. I did get a lovely tan though, the only trouble is it makes me look like a hippo!

I got a letter from Cliff Michelmore the other week, pleading with me to join him on Holiday '88 as a travel consultant but it's not my scene, and all that foreign food gives me indigestion. Besides which, I'm far too busy being an international megastar to be jetting off around the world again.

Have you tried my latest adventure The Life of Repton yet? You may have already had a copy from Santa. I bumped into him up in the Arctic and told him what an ideal Christmas present it would make, but if he couldn't get hold of enough copies for everybody I guess

you'll have to go buy it for yourself.

If you've already got a copy and are a bit concerned, don't worry, I'm not an OAP yet, that was just a clever use of the crystal ball — there's still life in the lizard yet.

This wonderful comic is especially for you, Repton fans. It's packed with everything you've always wanted to know, whether you're just starting out or an expert. For the beginners there is Getting Started, and for the more experienced Reptonians, previously unpublished Repton 3 screens. For everybody to enjoy there's my superb editor competition — designed by modest little me. It's easy to follow and should make you a dab hand with the editor. As Agony Uncle Repton, I answer many of the queries you have written in with.

Well, I can't hang around here chatting all day, I've got more places to visit and screens to design. If you want to write to me you can do so c/o Superior Software — they'll pass the letters on, they're such nice people — and I'll be only too glad to help.

See you soon

Yours



Getting started

THERE may be two reasons why you haven't yet completed the first screen of Repton 3, either you haven't bought the game and your friends won't let you borrow it — I wouldn't let my friends borrow mine, it's far too much fun to play — or you haven't got the necessary patience, skill and super-intelligence of my good self.

Well, for whatever reason it is, being a kind

and generous reptile, here is some help. I can't teach you patience or intelligence — but I can teach you some tricks of the trade. Although don't think I'm a pushover and will release all the other solutions — you can work those out for yourself.

What I've got for you here is the solution to the first Repton 3 screen. All the instructions are from your viewpoint, so go left means to

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	
1	5	2							2	6	2	6	1	18	1	3	3	6	3					1	3	3	1
2	3	1				1			3	2	2	3		3		6	3	3	3	6	3	3	3	3	3	2	
3									8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	3	
4									8		3	3	3		24	8	28	8	2	2	2	2	8	1			
5									8	8	8	8	8	6		8	2	8	2	1	2	6	8	3			
6	8	8		2	13	11	14	24			8	32	32	8	29	8	2	8	2	3	2	2	8	3			
7	30	12		2	16	9	22				8		23	8	8		8	1	1	8	8	8			25		
8	2	16	32		2						8	8	8	8					3	3					3		
9	2	10	18	1	1	1		25			2	2	8		8	8	8	8	8	8	8	8	8	8	8	8	
10									2	2	2	2	3	24	8	8	8	8		8	1	2	6	2	2	8	
11	8	8	8	8	8	8	8	8	14	2	2	3				2	2	6	2	6	8	2	1			29	
12											8	8	8	8	8	8	8	2	2	2	2	8	3	13	14		
13											8	2	2	2	1	8	8	8	8	8	8	8		20	22	2	
14											8	6	6	3	2	10	2	2	2								
15																											
16																											
17																											
18																											
19	3	3	8	8	8	8	8		23		8		17	21	12	10	16	22									
20	6	2		2	17	2	12				8	2			3	1	3										
21	6	2	6				8		8	5	8	25	6														
22	2	2	2	18	10	17	8	23	8	2	8	3	3		2												

Agony Uncle Repton

THIS is Agony Uncle Repton here, lending a sympathetic ear to any of your reptilian problems.

Dear Uncle Repton, I would like to nominate myself for the Repton Fan of the Year. Since I bought the Superior Collection Volume 1, which included the original Repton, I've been totally hooked. I have purchased every Repton game out and hope to see lots more.

The other week at school we had a fancy dress competition. I went as Repton and my best friend went as Commander Stryker. It

was great fun. Please, please, please (grovel, grovel) let's have some more Repton games — I don't know if I can live without you.
— Tommy (aged 12), Glasgow.

● It's very encouraging to know you're so enthusiastic about my games. As for the Fan of the Year award, we haven't started that competition, but if we ever do you'll be the first nomination.
More screens? I can't promise anything



Over £600

worth of Superior

Software's super games

- **1st prize – 10 games of your choice**
- **2nd prize – 5 games of your choice**
- **3rd prize – 3 games of your choice**
- **25 runner-ups of 1 game**

To win this fun competition just follow these simple instructions:

- Load up the Repton screen editor and select the television symbol at the top right.
- The centre screen area is cleared and the 32 standard Repton game icons appear in two rows at the bottom of the screen.

- We'll assume that these icons are numbered from 1 to 32, left to right and top to bottom.

- Alongside you can see a Repton 3 screen with each square numbered to represent one of the icons. The letter T, on the competition screen, denotes the destination of the transporter.

- Set the timer to 1200.
- After building the screen, save it and play it. The object of the competition is to find out where all the rocks will finish up.
- Don't disturb any rocks that are not necessary to complete the screen.
- And make sure you stop the fungus growing as quickly as possible.

When you've completed the screen and you've got the solution correct, work out the coordinates of each rock – F3, J9, T14 and so on – then send the answer with your name and address, on a postcard only, to:

Repton screen competition, Micro User, Database Publications, Europa House, Adlington Park, Adlington, Macclesfield, SK10 5NP.

Closing date March 31, 1988

Problems solved

● **Timer:** The time is entered by selecting icon 12, as shown on your instruction leaflets, and then the pull-down menu headed maps. The time counts down from a maximum of 9999.

Whenever a time capsule is consumed the clock is reset to its starting figure. There is no defined minimum time limit, but it is unlikely that a screen will be completed in under 500, which lasts for approximately 35 seconds before the screen starts flashing.

● **The Edit code:** Once you have completed a screen, you are given the edit code. This is

your left as you are facing the screen, not to my left as I face you.

- Move upwards and left, to the far side of the rock sitting on the safe. Go down and collect, from below the earth, the two diamonds in the bottom corner.

- Return to the starting position and move straight up to the safe and two rocks. Push the first rock behind the safe, step back to let the second rock fall on to the safe then push the second rock over the first.

- Proceed upwards following the path to the right, then continue upwards as far as possible. Go down into the cavern and collect the diamond in the bottom left-hand corner. Move towards the middle and collect the two diamonds on the left of the row of four.

- Move back out of the way and allow the egg to fall and crack open. When the monster hatches the rock on the diamond to the right will fall and kill it. Collect the other two diamonds and the key pushing the rock to the left so you can escape.

- Collect the other remaining diamonds above – all the safes turned into diamonds when you took the key.

- Proceed towards the cavern underneath and clear the earth and diamonds surrounding the cages. Collect the other diamonds in the cavern, but be careful, the bottom diamond under the rock will release the spirits – which are deadly to me.

- You can predict where the spirits will go because they always follow the left hand wall or object. They turn into diamonds when they reach the cages. Collect the diamond previously trapped by the spirits.

- Return to the starting position via the cages cavern, collecting the newly created diamonds on the way.

- Collect the diamonds in the bottom alcoves. Being very careful not to remove unnecessary earth which will allow rocks to fall and trap the diamonds in with rocks.

- To reach the diamond in the bottom left-hand corner of the screen, you must go

behind the rock on the edge above and push it to the right, otherwise when you remove the earth and travel down it will fall and kill you.

- Return to the starting position then move upwards on the left-hand side of the screen. Go round the U-bend, collecting diamonds, and continue upwards until you reach the top where a rock will be blocking your path.

- Push the rock to the right and start collecting the diamonds. Move quickly underneath and allow the egg to fall and hatch. Turn and push the rock left to kill the monster.

- Go round the wall, into the cavern below. Collect the two diamonds and move sideways so that the rock falls. Push the rock two spaces to your right. Move down the right-hand wall.

- When you have cleared the earth supporting the two rocks move back up and allow them to fall. Collect the other diamonds without removing the earth holding the rocks.

- Return to the starting position and go right. Collect the diamonds in the bottom alcove. Move upwards and collect the diamond above allowing the rock to fall. Collect the diamond behind it and then clear the alcove downwards to reach a further diamond and a crown.

- Go back up and collect the diamonds clockwise around the central rockery. When you collect the diamond holding the rock up, push the rock down the alcove, otherwise it will drop on you.

- Move downwards into the bottom right-hand corner of your screen collecting any diamonds you can see. Pass under the time bomb and into the bottom chamber.


- Collect the bottom right diamond then move along the bottom collecting four more. Remove the earth from beneath the rocks, stepping aside to allow them to fall. Collect the final diamond and return to and enter the time bomb.

Well done, only 103 screens to go! Good luck, Repton fans.


**4**

Hidden screens


Just to make things more difficult for you the last three screens in every group of eight are hidden – the map does not appear when you press M. So, as a special exclusive, here are all nine hidden screens from the first Repton 3 collection.

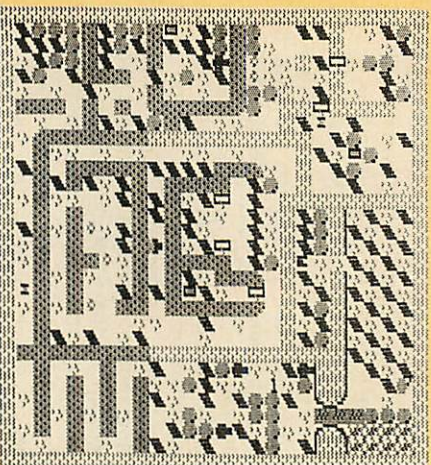


PRELUDE, Screen F

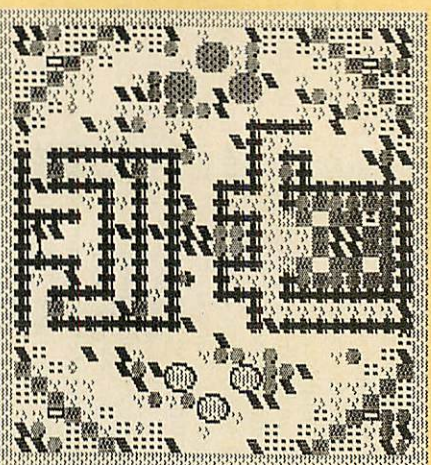


PRELUDE, Screen G

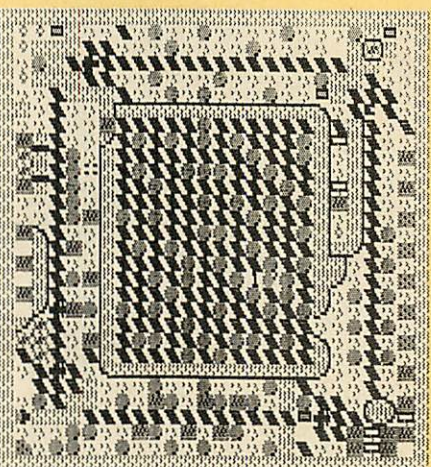


FINALE, Screen F

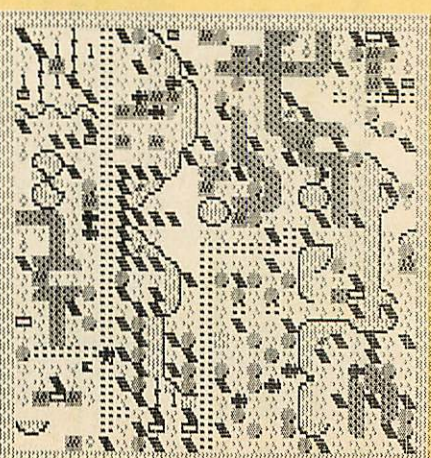


FINALE, Screen G

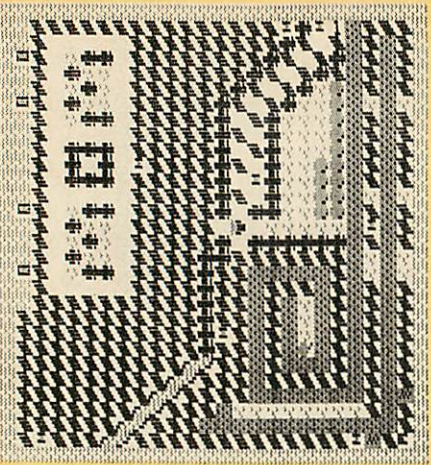


TOCCATA, Screen F

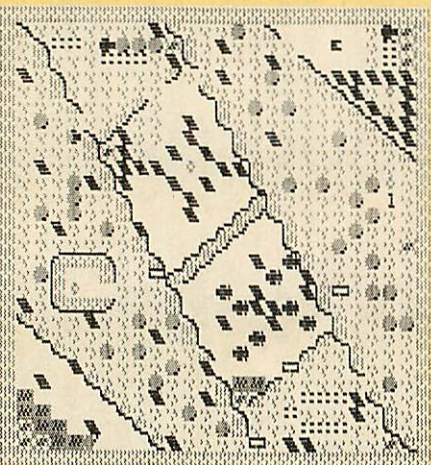

TOCCATA, Screen G

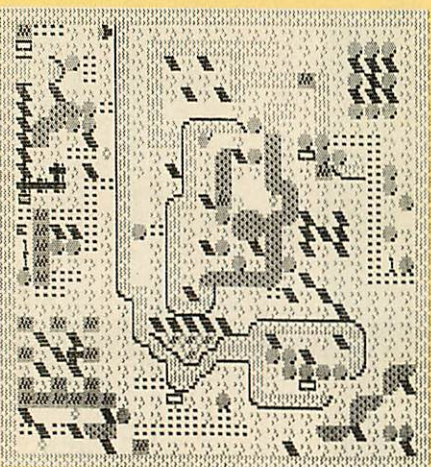

TOCCATA, Screen H

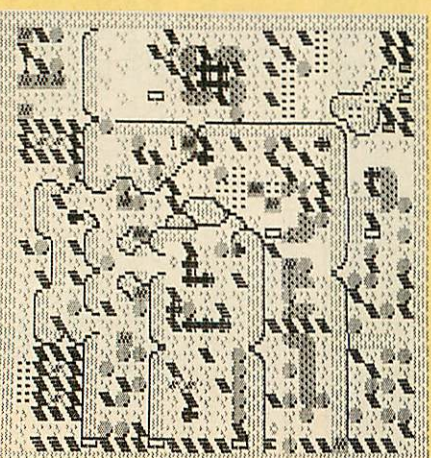

FINALE, Screen H

**5**

MICRO MEDIA

Computer Supplies Ltd.

Freepost,
Dept. MU, Rydal Mount, Baker Street
Potters Bar, Herts EN6 3BR (NO STAMP REQUIRED)

0707 52698 (5 lines)

HEAD CLEANERS

	5.25"	3.5"
1	3.95	5.00
3+	3.50	4.55
6+	3.15	4.10


5 1/4 MICRO MEDIA Brand Discs

	10	30	50	100	250
SS/DD	6.55	18.55	29.05	53.10	118.00
DS/40T	7.90	22.30	34.90	64.60	144.50
DS/80T	9.40	26.50	40.20	75.15	165.90
DS/HD for PCAT	20.10	57.20	90.10	168.60	385.55

5 1/4 Reversible discs (Flippy's)

Have two write protect notches & index holes.
Suitable for 40 or 80 track drives.

	10.55	30.00	47.40	88.10	204.55
--	-------	-------	-------	-------	--------



Discs purchased direct from one major manufacturer. 100% certified error free - lifetime guarantee.

5 1/4 Rainbow Discs come in five colours

	25	50	100	250	500
SS/DD	16.50	30.75	57.10	134.50	252.45
DS/40T	17.95	33.10	60.70	141.45	262.20
DS/80T	19.00	35.20	64.85	148.75	276.00

5 1/4 Unbranded Discs

SS/DD	9.80	19.35	36.40	86.55	163.85
DS/40T	10.95	20.65	38.20	89.70	172.50
DS/80T	13.55	25.65	47.85	113.55	216.20

3 1/2 MICRO MEDIA Brand

SS/DD	17.55	50.45	80.25	147.70	347.80
DS/DD	18.75	53.90	85.95	159.20	376.55

PRICES INCLUDE V.A.T.




3 1/2 Unbranded Discs

	10	30	50	100	250
SS/DD	15.10	42.60	65.95	117.70	264.75
DS/DD	16.20	45.70	72.95	128.50	290.00

AUTUMN CATALOGUE OUT NOW - CALL OR WRITE FOR YOUR COPY

Monitor Swivel Bases



Pan tilt revolves around 360 degrees
12.5 degrees tilt up and down
Adjustable by front mechanism.

	55x280x260mm for 12" Monitors	55x355x320mm for 14" Monitors
1	12.10	16.70
3+	10.99	15.15
6+	10.35	14.30

Adjustable Copy Holder


A4 adjustable desk clamping. Magnifying cursor line. Paper thickness adjustment. Paper height adjustable clip.

A4 Version	25.35
Holds up to 300g	
Desk Top Version	13.69
Holds up to 1000g	
A3 Version	40.65
Holds up to 1400g	

Printer Stand

5mm perspex

80 Column Version	400 x 310 x 100mm	21.65
132 Column Version	600 x 310 x 100mm	29.30



Mobile Printer Stand

Rugged steel frame. Height adjustable basket for output paper & base shelf for input paper. Self assembly - includes castors.

80 column	£52.90
132 column	£65.40

The Space Saver



Paper feed and refeed positioned one above the other. Dial controlled paper feed with adjustable deflectors ensures smooth flow and automatic refolding.

	80 column 414x380x460mm	132 column 530x380x460mm
1	34.85	42.50
3+	32.75	40.00
6+	31.05	38.30

Printer Ribbons

Prices (£) per each ribbon

	3	6	12
Amstrad 8512/8256	5.65	5.35	4.90
R, G, BR, BL, Y	7.50	7.10	6.55
DMP 2000/3000	2.80	2.60	2.35
Brother HR15 MS	3.30	3.10	2.80
R, BR, BL	4.35	4.10	3.75
Centronics GLP	3.65	3.45	3.15
R, G, BR, BL, Y	4.65	4.40	4.00
Canon 1080/1156	3.30	3.10	2.80
R, G, BR, BL, Y	4.95	4.65	4.25
Citizen 120 D	4.70	4.35	4.15
Diablo HyType II MS	2.80	2.65	2.40
R, BR, BL	3.80	3.55	3.25
Epson			
FX/MX/RX 80 FX 800	3.55	3.35	3.10
R, BR, BL, G, Y	4.95	4.65	4.25
MX 100/FX 1000/FX 105	4.65	4.35	4.20
R, BR, BL	5.85	5.55	5.10
LX 80/86 GX 80	2.80	2.65	2.40
R, G, BR, BL, Y	4.70	4.45	4.05
Juki 6100 MS	3.30	3.10	2.80
6100 SS	2.05	1.90	1.75
R, BR, BL	2.75	2.60	2.35
Kaga KP810/910	3.30	3.10	2.80
R, G, BR, BL, Y	4.95	4.65	4.25
M/Tally MT80 MS	4.10	3.85	3.55
Panasonic KXP110	5.50	5.20	4.75
R, G, BR, BL, Y	7.20	6.80	6.25
Qume IV MS	3.30	3.10	2.80
Fabric	3.30	3.10	2.80
Star NL 10	5.50	5.20	4.75
Shinwa CP80 MS	4.10	3.85	3.55


One off if ordered with other product.
Please mix colours and types for best prices
R = Red, BR = Brown, BL = Blue, G = Green, Y = Yellow

If the ribbon you require is not listed please let us quote

The above is a small selection of the 250 different ribbons we stock. We shall be pleased to find your ribbon, however old or obscure.

MD 120

1	12.55	5 1/4" x 120
3+	11.90 each	
6+	11.35 each	



Wire Printer Stand


stacks print-out in document tray automatically. Suitable for most standard printers. Made of safety coated steel wire.

For 80 column £14.50
For 132 column £16.50




MD 50

5 1/4" x 50	
1	7.80
3+	7.40 each
6+	7.10 each



MD 100

5 1/4" x 100	
1	10.80
3+	10.30 each
6+	9.80 each




MM 40

3 1/2" x 40	
1	8.30
3+	7.90 each
6+	7.50 each



MM 80

3 1/2" x 80	
1	10.95
3+	10.40 each
6+	9.90 each



Computer Labels

Continuous fanfold, sprocket fed
Price per 1,000 3,000

70x36	3.85	11.55
89x36	5.65	14.25
89x49	7.95	20.40
102x36	6.35	15.30

Please state no. of labels across the sheet (1, 2 or 3)

Computer paper

Plain fanfold, micro perf edges

Size	Weight 1000s gm per box	1box	3box +
11x9 1/2	60 2	16.90	43.80
	80 2	20.90	53.55
Exact A4			
11 1/2 x 9 1/4	70 2	22.50	58.50
	90 1	16.90	45.15

ALL PRICES INCLUSIVE OF POSTAGE & PACKING AND V.A.T.

MICRO MEDIA

Computer Supplies

Freepost, Dept. MU, Rydal Mount, Baker Street, Potters Bar, Herts. EN6 3BR



Access & Visa

Out of Office Hours (Answer machine)

0707 52698 (5 lines)

Orders despatched 24 hrs.

Please allow 5 days for delivery.
For next day delivery, please ring for details. Postage covers U.K. only.

A Catalogue is available with a more comprehensive range of products including - 3M & Verbatim discs - a wider choice of paper labels, ribbons and accessories.


Ring or write to obtain your copy now!

Educational and HMG orders accepted. For official orders/invoice/credit orders there is a minimum order value of £15.00 excluding V.A.T. Any order under £15.00 will be subject to £3.00 handling charge.

Personal callers welcome
Weekdays 8.30am - 5.30pm
Saturdays 9.30am - 1.00pm

MICRO MEDIA - MICRO MEDIA - MICRO MEDIA - MICRO MEDIA - MICRO MEDIA - MICRO MEDIA -

Panasonic KXP1081



with BBC cable & paper
£165.00 (£143.48+VAT)
above with Screen Dump & 2m cable
£171.00 (£148.70+VAT)

	Exc VAT	Inc VAT
KXP1080 Fabric Ink ribbon	4.26	4.90
KXP1080 View Printer Driver	7.83	9.00
KXP1080 Control/Dump Rom	13.00	14.95

Panasonic KXP1082

(as 1081 but 160cps)
with BBC cable & paper
£199.00 (£173.04+VAT)

STAR LC10

with BBC cable & paper
£199.00 (£173.04+VAT)

Canon PW1080A

with BBC cable & paper
£239.00 (£207.83+VAT)

Kaga/Taxan KP810

With BBC cable and paper
£239.00 (£207.83 +VAT)

STAR NL10

with BBC cable & paper
£195.00 (£169.57+VAT)

Kaga/Taxan KP815

With BBC cable & paper
£289.00 (£251.30 + VAT)

CITIZEN 120D & LSP10

with BBC cable & paper
£165.00 (£143.48+VAT)

EPSON LX 800

With BBC cable & paper
£205.00 (£178.26 + VAT)

JUKI 6100

with BBC cable & paper
£299.00 (£260.00+VAT)

VOLTMACE JOYSTICKS

Delta 14B single	11.26	12.95
Delta 3B single	9.52	10.95
Delta 3B twin	15.61	17.95

PRINTER ADD ONS

	Ex VAT	Inc VAT
Universal Printer Stand	13.00	14.95
LX800 Sheet Feeder	62.61	72.00
LX/FX 800 Print Ribbon	3.00	3.45
NL-10 Sheet Feeder	47.83	55.00
NL-10 Print Ribbon	4.80	5.52
120D Sheet Feeder	86.09	99.00
120D Print Ribbon	4.00	4.60
KP/PW Print Ribbon	3.39	3.90
View Printer Driver	7.83	9.00
2way Printer Sharer	43.43	49.95
Juki 6100 Dust Cover	5.60	6.44
Printer Dust Covers other	4.00	4.60

PRINTERS/CABLES

	Ex VAT	Inc VAT
Epson LQ800	426.09	490.00
Epson FX800	313.04	360.00
Panasonic KXP3131 Daisy	233.91	269.00
Juki 2200 Daisy	207.83	239.00
Kaga/Taxan KP915	350.00	402.50
Amstrad LQ3500	300.00	345.00
MP 165	169.57	195.00
MP 420	294.78	339.00
1.5m (4 foot) BBC cable	5.70	6.60
2.0m (6 foot) BBC cable	7.74	8.90
Compact printer cable	7.74	8.90
IBM/Archimedes cable	7.74	8.90

EPROMS, 8271

	Ex VAT	Inc VAT
1-9 27128 250nS 21V	3.56	4.10
10+ 27128 250nS 21V	3.26	3.75
1-9 27128 250nS 12.5V	3.04	3.50
10+ 27128 250nS 12.5V	2.75	3.16
1-9 2764 250nS	2.60	2.99
10+ 2764 250nS	2.39	2.75
1-9 27256 250nS	4.22	4.85
10+ 27256 250nS	3.83	4.40
1-9 TTL/Cmos set	3.91	4.50
1-9 8271 controller	35.65	41.00
1-9 6264 LP 150nS	2.56	2.95
Acorn 8271 DFS	43.48	50.00

ROMS

	Ex VAT	Inc VAT
Inter-Word	37.39	43.00
Inter-Sheet	36.52	42.00
Inter-Base	48.70	56.00
Wordwise Plus	37.39	43.00
MEGA 3	71.30	82.00
Spell Master	40.87	47.00
ACP Disc Investigator	22.61	26.00
ACP Disc Toolkit	26.96	31.00
View 2.1	38.26	44.00
ViewStore	38.26	44.00
OverView I & II	68.70	79.00
View Professional	68.70	79.00

DISKETTES

	Ex VAT	Inc VAT
10 Banana Reversible	8.65	9.95
10 3.5" D/S 135psi	1.65	1.90
10 96pi D/S D/D + case	13.90	15.99
10 96pi D/S D/D + case	7.39	8.50
10 96pi D/S D/D in box	6.52	7.50
50 96pi D/S D/D in boxes	21.70	24.95
100 96pi D/S D/D in boxes	39.13	45.00
50 Disc Box hinged + lock	6.52	7.50
10 Disc Box hinged + lock	9.00	10.00
Black Library case	1.21	1.39

5 1/4" DISC DRIVES

	Ex VAT	Inc VAT
Toshiba 400K 80T chassis	65.22	75.00
Toshiba 400k + case etc	82.61	95.00
Cumana CSX100	91.30	105.00
Cumana CSX400	124.35	143.00
Cumana CD800S	260.00	299.00
MD400A 400K No PSU	88.70	102.00
MD400B 400K + PSU	103.48	119.00
MD802C 800K No PSU	173.91	200.00
MD802E 800K + PSU	191.30	220.00
MD802D 800K + stand	216.52	249.00
Phone for Viglen & Torch Winchester		

MONITORS

	Ex VAT	Inc VAT
Philips CM8833	230.43	265.00
Philips CM8852	251.30	289.00
Philips BM7502 Green	68.70	79.00
Philips BM7522 Amber	73.91	85.00
Philips BM7542	73.91	85.00
Philips BM Tilt stand	7.78	8.95
Taxan KX P31 Green	73.91	85.00
Taxan KX P39 Green	82.61	95.00
Taxan KX Amber	82.61	95.00
Taxan Super Vision 625	313.04	360.00
Microvitec 1451	221.74	255.00
Microvitec 1451 AP	260.00	299.00
14" Tilt/Swivel Stand	13.87	15.95

MASTER/COMPACT

	Ex VAT	Inc VAT
Master 128K Micro	365.22	420.00
Archimedes 305 from	699.00	803.35
512 Co-processor	185.00	212.75
Turbo Upgrade	98.78	113.50
Acorn Z80 2nd Pro	317.39	365.00
Acorn Cartridges	10.87	12.50
Peartree Cartridges from	8.65	9.95
Care Cartridges from	7.65	8.80
ARM Assembler Book	12.00	12.00
Understanding Interword	6.50	6.50
Reference Manuals	14.00	14.00
View 3/View Sheet Guides	9.00	9.00
Master & B Dust Covers	3.00	3.45
Monochrome Compact	360.87	415.00
Second user BBC B's available		

Phone for our best price before placing your order
EDUCATIONAL & GOVERNMENT ORDERS WELCOME

All products have a 12 month no quibble guarantee

Prices subject to variation without prior notification

We are closed to callers all day Wednesday & some Saturday afternoons
Carriage 92p (80p + VAT) Securicor £6.90 (£6.00 + VAT)

WeServe

Larger items
delivered
by Securicor



Micro Dept.
128 West Street,
Portchester,
Hants.
PO16 9XE
Tel: 0705 325354


ENTER THE EXCITING WORLDS OF

Dinosaur Discovery, Box of Treasures


Granny's Garden, DragonWorld,

Flowers of Crystal, The Big Calculator

Zoopak, Tele-Book, Spacex

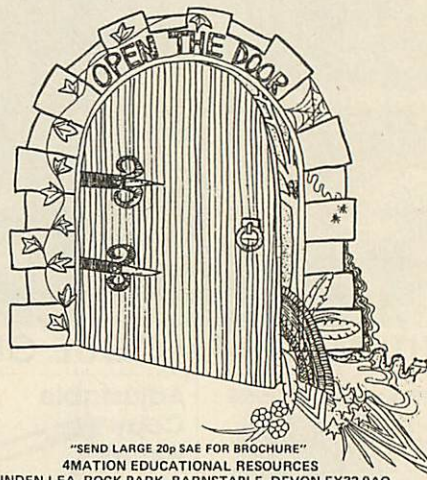

"SEND LARGE 20p SAE FOR BROCHURE"
4MATION EDUCATIONAL RESOURCES
LINDEN LEA, ROCK PARK, BARNSTAPLE, DEVON EX32 9AQ
TELEPHONE: 0271 45566



ELECTRONIC MAILBOX TTNS 01:YKN045

SOLID STATE & MECHANICAL DESK TOP DATA SWITCHES FULL TWELVE MONTHS GUARANTEE

"PRINTERSHARER" Several Micros to one Printer
"PRINTERCHANGER" One Micro to several Printers
"PRINTERCROSSOVER" Two Micros to two Printers



FOR LONG CABLES

Keyzone Solid State Switching Devices can use cables from
1m to at least 30m on input & output without any data loss/error

PARALLEL PRINTERSHARER SOLID STATE MANUAL

Model	Pins	Way	Price
BPS3	26 (BBC)	3	£60
BPS3C ABOVE WITH INTERLINKS			£75
BPS6	26 (BBC)	6	£110
BPS6C ABOVE WITH INTERLINKS			£140
APS2	36	2	£75
APS3	36	3	£85
IPS2	25D (IBM)	2	£70
IPS3	24D (IBM)	3	£80

PARALLEL PRINTERCHANGER SOLID STATE MANUAL

BPC3	26 (BBC)	3 way	£60
APC2	36	2	£75
APC3	36	3	£85
IPC2	25D (IBM)	2	£70
IPC3	25D (IBM)	3	£90

PARALLEL PRINTERCROSSOVER SOLID STATE MANUAL

BPX	26 (BBC)	2x2	£70
APX	36	2x2	£95
IPX	25D (IBM)	2x2	£85

SOLID STATE AUTOMATIC PARALLEL PRINTERSHARER

APS2A	Parallel 36 pin	2 way	£105
APS3A	Parallel 36 pin	3 way	£115
APS4A	Parallel 36 pin	4 way	£180
IPS2A	Parallel 25D (IBM)	2 way	£100
IPS3A	Parallel 25D (IBM)	3 way	£110
IPS4A	Parallel 25D (IBM)	4 way	£150
IPS8A	Parallel 25D (IBM)	8 way	£200

SERIAL PRINTERSHARER/CHANGER PCB - ALL LINES (NOT HARD WIRED)

SR232	25D-PCB	2 way	£55
SR233	25D-PCB	3 way	£65
SR234	25D-PCB	4 way	£75
SR423	5DIN (BBC)	3 way	£40
SR292	9D (Mac)	2 way	£52
SR293	9D (Mac)	3 way	£59
SR2C	5DIN (/c/c)	3 way	£40

SERIAL PRINTERCROSSOVER

SR23X	Serial RS232-25D (PCB)	£70
SR423X	Serial 5 pin DIN	£45
SR29X	9 Pin D. (Mac)	£62
SR2CX	5 Pin DIN (/c/c)	£45

MECHANICAL T-SWITCHES

FOR SHORT CABLES

PCB - ALL LINES - NOT HARDWIRED

T36-2	Centronics 36 pin 2 way	£60
T36-3	Centronics 36 pin 3 way	£70
T36-4	Centronics 36 pin 4 way	£92
T36-X	Centronics 36 pin 2x2	£90
T25-2	Parallel 25D IBM 2 way	£55
T25-3	Parallel 25D IBM 3 way	£65
T25-4	Parallel 25D IBM 4 way	£75
T25X	Parallel 25D IBM - 2X2	£75

CABLES (STANDARD 6FT)

KPC101	Parallel Interlinks for BBC Switches	£8
KPC101-C	Parallel Interlinks for Compact	£9
KPC103	BBC Printer Cable	£9.50
KPC103	Compact Printer Cable	£10
KSC101	Serial RS232 (10 lines) M/M or M/F	£12
KBC106	Serial RS232 (25 lines) M/M or M/F	£14
KSC-101	Serial IBM Printer Cable (10 lines)	£12
KPC-106	Parallel Interlink for IBM Switches	£14
KPC-105-6	Parallel IBM Printer Cable (6 ft)	£15
KPC105-10	Parallel IBM Printer Cable (10ft)	£17
KPC104R	Centronics Flat Ribbon Cable 36-36pin	£12
KPC104F-5	Centronics Flex Cable 36-36pin (6 ft)	£16
KPC104F-10	Centronics Flex Cable 36pin (10ft)	£18

CUSTOM CABLE MAKING SERVICE AVAILABLE



Add postage: Switches £3.00 each, & cable £0.75 each + 15% VAT

KEYZONE COMPUTER PRODUCTS LTD

U14, Action Business Centre,

School Road, London NW10 6TD

Telephone: 01-965 1684/1804. Telex: 8813271 GECOMS G



MID-SUSSEX SOFTWARE



MUSIC PRINTING

- * The music processor from Mid-Sussex Software produces printed music to professional standards.
- * Easy music entry for single parts or scores, editing, transposition, extraction of parts from scores, playback.
- * Price £54.95 - State 40/80 track, BBC B or Master.

NEW MUSIC PROGRAMS

- * Two new programs for use in music education to develop aural and sight reading skills.
- * Pitch Trainer
- * Rhythm Tutor
- * £12.50 each - State 40/80 track.


"These programs are a must for all teachers. I can't think how I managed without them". - Music Teacher.

Send for more details to:- Mid-Sussex Software, 11 Bridle Way, Pound Hill, Crawley, West Sussex, RH10 4HP or Telephone Horsham (0403) 54922.

MITEYSPICE

The unbeatable circuit simulator for all BBC micros incl Archimedes

Miteyspice provides AC and DC simulation: the DC may be used to establish the operating point in a non-linear circuit at which a small-signal AC analysis may then be performed. Powerful features include up to 25 curves plotted on each graph, imperfect mutual inductors & 20 parameter Ebers Moll transistor model. Manual shows how to apply manufacturer's data. Miteyspice is in use in research and industry throughout the U.K. and is a teaching standard for analogue simulation.



"In my experience 'Miteyspice' is, quite simply, unique. The program has been applied to a number of circuits of both known and unknown performance, for which a mass of data was easily and relatively quickly obtained. Where checks could be applied, the accuracy of the data was confirmed, and in no case could it be doubted. 'Miteyspice' is an invaluable design tool which leaves no excuse for the inadequacy and inefficiency of 'design by soldering iron'. It also has great potential in education, for lecture and practical preparation and as a potent teaching aid, not to mention settling staffroom arguments! It is not too complex for modest users, yet it can tackle substantial jobs, so it is a 'must' for any circuit design consultant or R&D lab with access to a BBC Micro. I wish I'd had something like this years ago!" T. Attewell, A+B Computing, Oct. '87

Send also for details of our other BBC, HP and IBM PC Engineering Software. We have very special terms for education.

STOP PRESS. PCB Autorouter now available for just £185

Those Engineers Ltd

106a Fortune Green Road • West Hampstead • London NW6 1DS

Tel: 01-435 2771 E-Mail: One to One Box 23332001 Tlx: 8950511 (ansbk ONEONE G) Quoting Box 23332001



BRAINSOFT


LTD

FOR THE BBC SERIES AND ARC.

ARC DESKTOP + TRANSFER SOFTWARE.

This software is an enhanced desktop for the Archimedes (© Acorn computer Ltd), and has the following functions:-
SCIENTIFIC CALCULATOR, A 30 function scientific calculator with a facility for number conversions.
CLOCK, A clock with a difference! Big ben digitised and incorporated in the archimedes desktop.
DIARY, Same design and function as Acorns standard diary.
NOTEPAD, An improved version of Acorns notepad, with direct pointer driven input.
PALETTE, A Palette of the same design as the Acorn Palette.
BBC CONVERTOR, This program blends into the desktop, when a RS232 lead has been connected between the BBC and the Archimedes select the 5.25" disk icon and a window showing the files on the BBC B disk drive appears on the archimedes. To load files just select them with a mouse (as many as you want), and from the desktop menu select load to make the files transfer automatically from the BBC to the archimedes. The baud rate is set at 19200 baud although any speed can be used, the Convertor is intelligent and recognises automatically the file types contained on the BBC's disk drive.
EDITOR, This is an optional facility for editing source text files for compilers (FORTRAN, C, PASCAL etc), to work it must be used on at least a 310 (this is not a disadvantage as none of the compilers are able to work on a 305). This advanced program blends fully into the desktop environment, and is very user friendly and intuitive in its use, the maximum text size is 2000 lines. The files produced are compatible with twin, it is entirely WIMP driven and needs no control/function keys. The basic editor functions included are string search, and replace, load, save, merge, print, clear.

"This kit from Brainsoft can be thoroughly recommended" from review in Archive magazine December 1987.

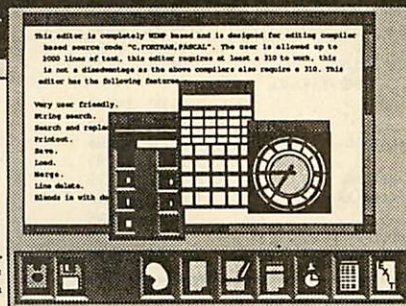

SIDEWAYS RAM

BRAINSOFT'S 32K STILL THE BEST VALUE
SIDEWAYS RAM FOR THE BBC RANGE.



- *Uses latest technology.
- *32K of ram in a size no larger than a EPROM.
- *No soldering required the two leads clip on.
- *Takes up only one sideways ram socket.
- *Does not use user port but uses AFE30 register.
- *Low power consumption.

Incompatible with ram boards except Peartree MR3000.

BRAINSOFT'S 16K COMPATIBLE WITH MOST
RAM BOARDS.

This module has been tested with the following boards:-
 ATP1, Watford, and Peartree MR3000.
 This module has the same construction of the 32K module but is minus the bank select line.

Write protect switch

At little extra cost a write protect switch can be added to a module which allows "protected" software to be loaded.
 NOTE: it is illegal to copy or pirate software.

All the above are guaranteed for 1 yr. Please state computer.

SOFTWARE

SIDEWAYS RAM UTILITIES BBC B,B+,MASTER

Now Version 3 with ARFS and APB !!

- MENU DRIVEN SOFTWARE this selects RAMLOAD, RAMSAVE, RAMLIST, PRINTER BUFFER, or PROGRAMMERS UTILITIES.
- ADVANCED PRINTER BUFFER provides the user with up to an extra 63K of buffer space, which allows the user to continue using WORDWISE-PLUS, VIEW or BASIC whilst the printer is printing.
- PROGRAMMERS UTILITIES are a collection of 25 utilities including a full-screen-memory editor, all variables clear, program relocation, program compaction, program repacker, ram list, ram enable, ram disable, ram status, speed control, computer status, string search, variable list, vector list, close all files, list of the currently active variables, keyload, keysave, program comparison with a file held on disk, ram save, and screen compaction/uncompaction which can pack a mode 0 screen in less than 1K of disk space.
- ADVANCED ROM FILING SYSTEM provides the user with fast access to programs and data, so fast that it can load a 20K program quicker than the BBC's CDS command takes to clear the memory. The ARFS is capable of storing files longer than 32K in length, the amount of file space is limited to the number of sideways ram the user has, the number of files, length of names being limited by only the ram size. The ARFS when enabled by ARFS acts like a disk interface allowing saves and deletions, as well as loading, many programs which use 'legal' disk calls are compatible.
- Also provided on the disk are three BASIC programs which can be easily adapted to run on NETWORK systems, ramload, ramsave and ramlist.
- Provided with the sideways ram utilities is a 12 page instruction book, the software is supplied on a 40T disk with 80T conversion software.

PRICE LIST 1ST QTR 88	
16K MODULE	JUST £14
32K MODULE	£14.5
WRITE PROTECT SWITCH	£2
SIDEWAYS SOFTWARE	£6
SIDEWAYS SOFTWARE	£6
ORDERED WITH A MODULE	£13

62256LP-12 RAM CHIP	£11
24OFF 62256LP-12	£10


ARCHIMEDES SOFTWARE	
LEAD ONLY	£8
SOFTWARE ONLY	£8
SOFTWARE + EDITOR	£13

LEAD + SOFTWARE	£14
LEAD + SOFTWARE+EDIT	£19

PRICES GIVEN FULLY
INCLUSIVE NO EXTRA COSTS.

EDUCATIONAL ORDERS ACCEPTED
DISCOUNTS GIVEN FOR QUANTITY

BRAINSOFT LTD
 22 BAKER ST.
 LONDON W1M 1EP.
 TELEPHONE 01-4660321



MICROMAN Computers

PASTURE LANE FARM,
PASTURE LANE, RAINFORD,
ST. HELENS, MERSEYSIDE, WA11 8PU

PHONE 074488 3667

SHOWROOM

SHOWROOM OPENING
9-6 MONDAY TO FRIDAY
9-1 SATURDAY



MAIL ORDER

PHONE 074488 5242

We accept both Access and Visa credit cards. Simply telephone your order, giving card number, expiry date, name and address, or send your order with cheque or postal order to the address opposite.

DELIVERY CHARGES INCLUDING VAT

Computers/Printers/Drives:
Next day £8.00, Trackback £4.00
Small Items: £1.00



ACORN DEALER : ECONET : SERVICE CENTRE



Archimedes

ARCHIMEDES 300 SERIES	Ex VAT	Inc VAT
Archimedes 310 Base	775.00	891.25
Archimedes 310 Monochrome	825.00	948.75
Archimedes 310 Colour	975.00	1121.25
Archimedes 310M Base	835.00	960.25
Archimedes 310M Monochrome	885.00	1017.75
Archimedes 310M Colour	1035.00	1190.25
ARCHIMEDES 440	Ex VAT	Inc VAT
Archimedes 440 Base	2299.00	2643.85
Archimedes 440 Monochrome	2349.00	2701.35
Archimedes 440 Colour	2499.00	2873.85

Free with every Archimedes Computer
ZARCH

The complete Lander Game
Box 10 3.5" Discs in plastic case
PLUS
FREE CARRIAGE

ARCHIMEDES UPGRADES	Ex VAT	Inc VAT
0.5MB Ram	89.00	102.35
Floppy Disc Drive	125.00	143.75
20MB Hard Disc & Podule	499.00	573.85
Podule Backplane	39.00	44.85
ROM Podule	59.00	67.85
I/O Podule	79.00	90.85
MIDI Add-on co I/O	29.00	33.35
ARCHIMEDES SOFTWARE	Ex VAT	Inc VAT
Ansi C	99.00	113.85
ISO-Pascal	99.00	113.85
MSDOS Emulation	99.00	113.85
Logistix	99.00	113.85
Minerva Deltabase	26.04	29.95
Minerva System Delta Plus	60.83	69.95
Clares Artisan	34.74	39.95
Clares Graphic Writer	26.04	29.95
Clares Toolkit Module	34.74	39.95

BBC MASTER SERIES	Ex VAT	Inc VAT
Master 128	379.00	435.85
Master Turbo Module	108.70	125.00

MASTER 512 UPGRADE SPECIAL OFFER

£199.00

Price includes VAT.

This offer includes: FREE MICROMAN 512 DISC
UTILITIES SOFTWARE WORTH £12.95.

BBC MASTER COMPACT SERIES:	Ex VAT	Inc VAT
Master Compact	349.00	401.35
Master Compact + TV Modulator	363.00	417.45
Master Compact + Green Monitor	399.00	458.85
Master Compact + Colour Monitor	549.00	631.35
RS232 Kit	26.00	29.90
Additional Floppy Disc Drive	99.00	113.85
Pal TV Adaptor	26.00	29.90
ECONET NETWORKS:	Ex VAT	Inc VAT
Archimedes/Master Econet Module	43.47	49.99
Filestore E01	828.00	952.20
Filestore E20	721.00	829.15

AHKTHER MITSUBUSHI DRIVE

Single 5.25" 400K 40/80T	99.96	114.95
Single 5.25" 400K 40/80T + PSU	113.00	129.95
Dual 5.25" 800K 40/80T	191.26	219.95
Dual 5.25" 800K 40/80T + PSU	217.35	249.95
Single 3.5" 400K	86.91	99.95
Single 3.5" 400K + PSU	104.30	119.95

BBC MONITORS:	Ex VAT	Inc VAT
Microvitec 1431 Std/Metal	119.13	137.00
Microvitec 1451 Med/Metal	242.61	278.00
Philips CM8833 Med/RGB/UV	260.00	298.00
Philips Green 7502	73.91	85.00
Philips Amber 7522	77.39	89.00
Philips White 7542	77.39	89.00

BBC DISC INTERFACES/ UPGRADES	Ex VAT	Inc VAT
Acorn 1770 Disc Interface	43.44	49.95
Acorn ADFS ROM	26.08	29.99
BBC B CO-PROCESSOR ADAPTERS:	Ex VAT	Inc VAT
Acorn Co-Pro Adapter	75.00	86.25
Watford Co-Pro Adapter	35.00	40.25

BBC B ROM BOARDS:	Ex VAT	Inc VAT
Watford Solderless ROM Board	32.00	36.80
Watford Battery Backup	3.00	3.45
Aries B12 Sideways ROM Board	40.00	46.00
Aries B12c Adapter	5.00	5.75
ATPL Sideways ROM Board	38.00	43.70

BBC B SIDEWAYS ROM/RAM EXPANSION	Ex VAT	Inc VAT
Watford 16K Sideways RAM Module	29.00	33.35
Watford ROM/RAM Card + 32K	39.00	44.85
Watford ROM/RAM Card 64K	52.00	59.80
Watford ROM/RAM Card + 128K	80.00	92.00
Watford Sideways ZIF Socket	15.00	17.25

BBC B SHADOW BOARDS:	Ex VAT	Inc VAT
Watford 32K Shadow RAM Board	59.00	67.85
Aries B32 RAM Extension Board	80.00	92.00

BBC EPROM PROGRAMMERS/ ERASERS	Ex VAT	Inc VAT
Control Telemetry EPROM Prog	95.00	109.25
Multiprom Programmer	39.09	44.95

Uviprogram & Multiprom programmers require either
SWR or ROM software listed below.

Uviprogram ROM Software	4.35	5.00
Uviprogram SWR Disc Software	1.74	2.00
Uviprogram EPROM Eraser + Timer	22.57	25.95

EPROMS/RAM CHIPS:	Ex VAT	Inc VAT
Eproms 2764 8K	P.O.A.	
Eproms 27128 16K	P.O.A.	
Eproms 27256 (12.5v)	5.00	5.75
Eproms 27512	9.00	10.35
RAM 6264LP-15 8K	3.00	3.45

BBC MODEMS:	Ex VAT	Inc VAT
Pace Linnet + Commstar II	139.00	159.85
Pace Nightingale + Commstar II	86.09	99.00
Watford Apollo Modem	84.00	96.60

BBC SPECIAL KEYBOARDS:	Ex VAT	Inc VAT
Concept Keyboard A4	109.50	125.93
Concept Keyboard A3	139.50	160.43

BBC DIGITISERS:	Ex VAT	Inc VAT
Graphpad II (BBC)	65.65	75.50

BBC VIDEO DIGITISERS:	Ex VAT	Inc VAT
Watford BEEB Video Digitiser	109.00	125.35
Watford Magazine Maker	129.00	148.35

BBC MOUSE/TRACKERBALL PRODUCTS	Ex VAT	Inc VAT
Watford Quest Mouse	35.00	40.25
Watford Quest Mouse + Paint	59.00	67.85
AMX Mouse + Super Art (Mk III)	69.52	79.95
AMX Mouse-Mat	4.35	5.00
AMX Pagemaker	43.44	49.95
AMX Extra Extra (Pagemaker)	21.70	24.95
AMX Super Art ROM: BBC B	43.44	49.95
AMX Super Art: Master	43.44	49.95
AMX MAX	17.35	19.95
Fleet Street Editor	34.74	39.95
Trackerball RB2 + ICON Soft	59.00	67.85
Trackerball + Pointer (Master)	59.00	67.85

BBC MASTER CONSOLE	Ex VAT	Inc VAT
Viglen Console	43.44	49.95
Viglen Master Console	52.13	59.95

BBC CAD SYSTEMS:	Ex VAT	Inc VAT
Pineapple Diagram II	55.00	63.25
Pineapple PCB Designer	85.00	97.75
AMX Design	60.83	69.95

PRINTERS

NEW STAR LC10

INCLUDING

CENTRONICS INTERFACE + 2M BBC LEAD

Ex VAT	Inc VAT
£173.04	£199.00

Star NX15 Wide Carriage	339.00	389.85
-------------------------	--------	--------

PANASONIC KXP1081

Printer + Free BBC Lead

Ex VAT	Inc VAT
£155.65	£179.00

Epson LX800	225.22	259.00
Juki 6100 Daisywheel	299.00	343.85
Panasonic Serial Interface	41.00	47.15
Star NL10 Sheet Feeder	55.00	63.25
LX800 Sheet Feeder	TBA	
Print Shaver 2 Way Switch	29.00	33.35

PLOTTERS:	Ex VAT	Inc VAT
Roland DXY880A A3 Plotter	694.78	799.00
Roland DXY980A A3 Plotter	999.00	1148.85

We are a Roland Main Dealer and stock the complete range of plotter, pens and paper.

BBC WORDPROCESSING:	Ex VAT	Inc VAT
Mega 3 Rom - NEW	85.00	97.75
View Professional	86.91	99.95
Interword ROM	42.61	49.00
Wordwise Plus ROM	42.61	49.00
View 3.0 ROM	45.22	52.00
Spellmaster	51.31	59.00

BBC DATABASE & SPREADSHEETS	Ex VAT	Inc VAT
Master Overview	86.00	98.90
Interbase ROM	60.00	69.00
Viewstore ROM	45.22	52.00
Intersheet ROM	43.44	49.95
Interchart ROM	29.52	33.95
Viewsheets ROM	45.22	52.00

BBC LANGUAGES:	Ex VAT	Inc VAT
Master C	78.00	89.70
BCPL ROM	52.00	59.80
ISO Pascal ROM	52.13	59.95
ISO Pascal Stand Alone Gen	30.00	34.50
Comal ROM	43.35	49.85
Acorn LOGO ROM	60.00	69.00
Logotron LOGO ROM	60.00	69.00
Micro-Prolog ROM	69.52	79.95

BBC UTILITIES	Ex VAT	Inc VAT
Master Termulator	34.74	39.95
System ADE + Master Version	49.00	56.35
Advanced Disc Investigator	25.00	28.75
Advanced Disc Toolkit	30.00	34.50
Vine Replay ROM's	30.44	35.00
Vine Master Replay	36.48	41.95

We stock a large range of utility software by ACORN, CLARES, COMPUTER CONCEPTS, WATFORD etc

ATARI ST COMPUTERS

We are now stocking the Atari ST computer, full range of peripherals, software and books

OPUS PC & AMSTRAD 1640

Ring or call for full price List

GOVERNMENT, NHS AND EDUCATIONAL ORDERS ACCEPTED

EDUCATION UPDATE

Taking help a step further

A RANGE of easy-to-use software for the physically handicapped has been released by Scetlander (041-357 1659).

The three programs for the BBC Master — Electra Pen, CAD Master and Storybook — are described as a serious attempt to get away from the Noddy-type software that is generally available for the disabled.

Electra Pen is an art and painting package capable of producing drawings easily and quickly by using either trackerball, keyboard or a system of switches. Features include colour fill, spray gun, ellipses, and a choice of pen nib sizes.

CAD Master has all the facilities of Electra Pen, but also includes a library of graphics such as trees, fences, hedges and border shapes. A selection of predefined building blocks is included for the user to produce windows and buildings via a concept similar to Lego.

One interesting feature of both Electra Pen and CAD Master is an optional speech synthesiser which audibly guides the user through each function of the program.

The final package, Storybook, is a utility for teachers to produce books on screen for use by the disabled.

It comes on two double-sided discs and boots up automatically. All that is required of the teacher, once a story with graphics has been produced, is for the disc to be loaded.

By simply pressing a switch, pages can be turned and reviewed at any speed. It is also possible to synchronise the program with a one-hour audio tape.


The story appears on a split screen with the graphics at the top and text underneath. Because the teacher produces the computer-based book it is possible to tailor the finished product to an individual's needs. Prices £27.50, £22.50 and £25 respectively.

Dictionary for children

AS part of the Viewbook educational software range, Information Education has released the Viewbook Oxford Children's Dictionary.

The program for the BBC Micro comes on five discs and contains a total of 12,000 headwords and 150,000 words in the definitions section.

Information Education (0782

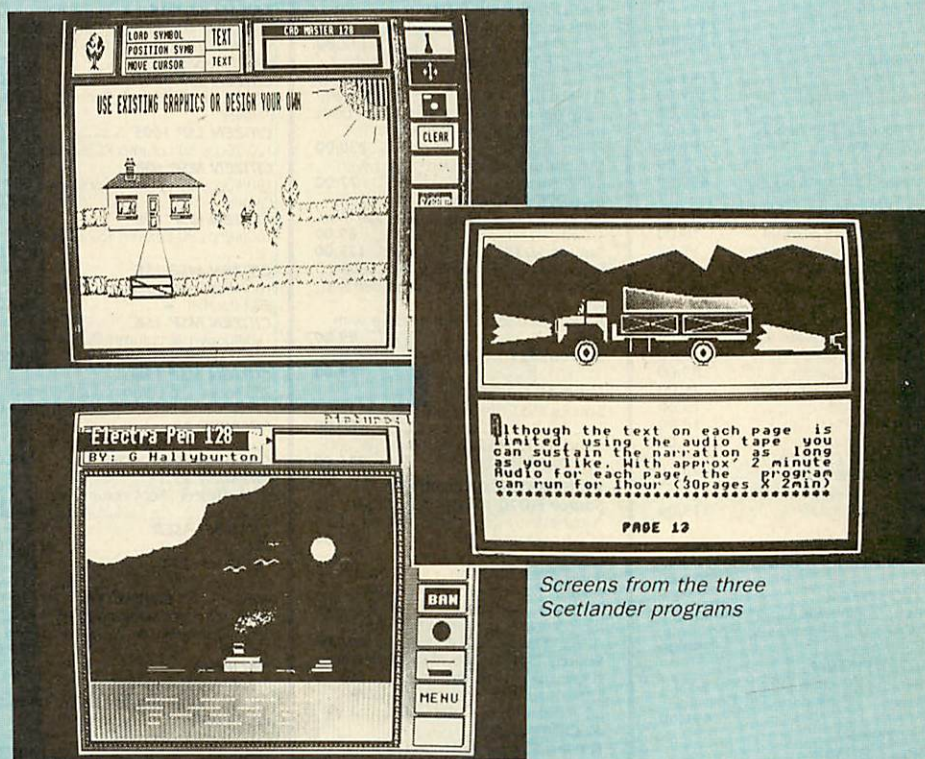

Screens from the three Scetlander programs

281643) says that the package has been designed for children in the 8 to 13-year-old age bracket to encourage them to look up and use new words. Price £35.

New line in characters

A UTILITY program for use with Wordwise and Wordwise Plus on the BBC Micro — Euroword — has been released by Charm Micro Soft (0772 616705).

The package, which comes on either a

5.25in or 3.5in disc, allows the user to produce accented and other European characters which can be displayed on-screen in preview mode.

Other features include underlining, function key strips, overprinting for additional accents and printer customisation.

The program provides a minimum of 26 European characters which are then broken down into five sets — French/Italian, German, Nordic 1, Nordic 2, and Spanish.

Output can be to either Epson-compatible dot matrix printers or daisy-wheel machines with the appropriate print wheel. Price £9.50 for 5.25in discs, £11 for 3.5in discs.

Mini Office II in Holland

STUDENTS at the International School of Eindhoven in Holland are working towards their O levels in mathematics and computer studies with the help of Mini Office II.

While on holiday in England the school's physics teacher, Jan Koks, bought a single rom version for the computer department to experiment with. After an enthusiastic reception from students and teachers a further 13 packages were ordered.

Head of the mathematics and computing studies department — Patricia Everid — said: "Mini Office II is an extremely good package for our

students. It is easy to use and also gives them an idea of linking database, spreadsheet, and word processing packages together".

Currently the school has 14 BBC Master 128s and two BBC Bs which are in full time use.

The maths and computing course, which covers all aspects of information technology and programming, lasts for three years and is based on the same syllabus as taught in London.

"Mini Office II has fitted in perfectly with the course", said Patricia. "For the price and features it really is an excellent package".

MASSIVE SAVINGS FROM THE MEGA-COMPUSTORE

ARCHIMEDES

305 BASE AKB10	695.00
305 & mono monitor	728.00
305 & colour monitor	865.00
310 BASE AKB15	752.00
310 & mono monitor	804.00
310 & colour monitor	952.00
A310M AKB30	815.00
A310M mono	865.00
A310M colour	1014.00

410 SERIES

Entry System	1399.00
Mono	1449.00
Colour	1599.00

440 SERIES

Entry System	2299.00
Mono	2349.00
Colour	2499.00
Archimedes/Master Econet	43.00
0.5 MB RAM	89.00
Floppy disk	125.00
20 Mbyte hard disk & podule (300 only)	499.00
Podule Backplane	35.00
Archimedes Pref. Manual	18.00
Assm. Lang Prog Manual	11.00
Archimedes software in stock	

MASTER 128

Complete with internal Software	346.00
Master Turbo Upgrade	99.00
Master Econet Module	40.00
Master 512 Upgrade	189.00
Universal second processor	75.00
Epm Cartridge	13.00
Reference Manual Part 1	13.00
Reference Manual Part 2	13.00

BBC MASTER COMPACT ENTRY SYSTEM

128K *Single 640K Drive*	
Bundled Software	313.00

TV SYSTEM

128K *Single 640K Drive* *UHF Modulator*	
Bundled Software	326.00

MONO SYSTEM

128K *Single 640K Drive* *Bundled Software* *12" High Res Monochrome Monitor*	358.00
---------------------------------------------------------------------------------	--------

COLOUR SYSTEM

128K *Single 640K Drive* *Bundled Software* *14" Medium Res Colour Monitor*	491.00
-------------------------------------------------------------------------------	--------

MONITORS

Phillips BM 7502	
12" Hi res. P31 Green Phosphor Screen. CVBS input. Audio input Band width 20 MHz. 2000 CHRS Display	68.00
Phillips BM 7522	
Amber Screen	82.00
Phillips BM 7542	
Dedicated WD phosphor Screen monitor	82.00
Phillips BM7513	
12" Green IBM compatible	104.00
Taxan KX117	
12" Green Screen P31	77.00
Taxan KX118	
12" Green Screen P39	86.00
Taxan KX119	
12" PUL Amber Screen	86.00
Taxan Super Vision 620	260.00

COLOUR MONITORS

Phillips CM8833	
14" CVBS and RGB medium resolution colour monitor. IBM PC compatible. Fast blankup to enable superimposing. Stereo Audio. Ear phone socket. 600 dots x 285 lines vertical	234.00
Phillips CM8852	
14" RGB professional med res colour. 700 dots x 285	251.00
Phillips CM8873	
14" RGB high resolution colour monitor. Res 850 x 480	478.00

MONITOR TO TV CONVERTER

AV 7300 Colour tuner module. Push button control. 12 preset channels. Built in aerial. Compact design. Composite video only	60.00
-----------------------------------------------------------------------------------------------------------------------------	-------

SWIVEL BASE

Tilt and swivel base for 12" or 14" monitor or TV. "Looks very elegant" at an unbeatable price	9.00
------------------------------------------------------------------------------------------------	------

SERIAL & PARALLEL T SWITCHES

Parallel T switch (2 way)	15.00
Parallel T Switch (4 way)	25.00

MITSUBISHI DISC DRIVES

Source 100% BBC compatible slimline disk drives. All drives supplied complete with formatting diskette, comprehensive users manual and all necessary cables. All drives are 40/80 Track switchable at the front and have two years warranty.

5 1/4" Drives without P.S.U.

400A Single 400K Double Sided	98.00
SD 802C Dual 400K Double Sided	190.00

5 1/4" Drives with P.S.U.

400B Single 400K Double Sided	117.00
SD 802E Dual 400K Double Sided	204.00

SD 802D Dual 400K Drives horizontally mounted in a monitor stand to fit both the BBC B and the Master series

Mitsubishi Bave drives uncased with 40/80 switch	230.00
Source SD35 3 1/2" disk drive, single drive	77.00

SOURCE DISC DRIVES

Source SD352 3 1/2" dual drive	69.00
Source SD355 3 1/2" single drive with P.S.U.	125.00
Source 352S 3 1/2" dual drive with P.S.U.	173.00

Supplied cased complete with cables, powered from computer. Extended two year warranty.

Source SD355 3 1/2" single drive with P.S.U.	99.00
Source 352S 3 1/2" dual drive with P.S.U.	173.00

SPECIAL OFFER

Source 355 Combo Dual 5 1/4" and 3 1/2" drives with P.S.U.	160.00
Source SD3545S Combo dual 5 1/4" and 3 1/2" drives with P.S.U.	216.00

WINCHESTER DISC DRIVES

Source HD20 Twillstar's 20 Mbyte winchester drive including Acorn DFS ROM. complete with P.S.U.	433.00
Source HDP201 Twillstar's 20 Mbyte winchester drive and a 400K double sided floppy drive built in a plynth to accommodate monitor on the top and the computer underneath. Includes ADFS ROM and P.S.U.	694.00
Source TS10 10 Mbyte tape streamer backup unit with utilities.	565.00

Other size hard disks are available, please call for our latest prices.

FLOPPY DISCS

Raven 5 1/4" pack of 10 in a clear library box	13.04
Raven 5 1/4" rainbow colour pack of 10 in library box	13.04
Raven 3 1/2" single sided pack of 10 in library box	12.00
Raven 3 1/2" double sided pack of 10 in library box	22.00

LOCKABLE STORAGE BOXES

Trackmaster 5 1/4" 70 x 5 1/4" lockable	7.00
Trackmaster 5 1/4" 100 x 5 1/4" lockable	9.00
Trackmaster 3 1/2" 40 x 3 1/2" lockable	6.00
Trackmaster 3 1/2" 100 x 3 1/2" lockable	9.00

PRINTERS

CANON PW1080A	
80 column. 160 cps draft 40 cps NLO. Built in friction & tractor feed.	217.00

CANON 55A

Wide version. IBM compat.	347.00
NEW JUST ARRIVED	
STAR LC-10	182.00

New enhanced version complete with IBM & Parallel Interface

Sheetfeeder	POA
STAR LC-10 Colour	POA
Ribbon	4.70

STAR NB24-10	415.00
STAR NX15	269.00
STAR ND10	259.00
STAR ND15	365.00
STAR NR15	425.00
STAR NR10	325.00
STAR NB15	585.00
STAR NB24-15	525.00

MP200

200 cps draft. 40 cps NLO. 7K buffer (128 downloadable characters in NLO) optional 8K memory.	255.00
-----------------------------------------------------------------------------------------------	--------

MICRO P MP165

80 Columns. 165 cps in draft. 35 cps NLO. Ultra high res. graphics. Friction and traction feed. 2 Year warranty.	173.00
------------------------------------------------------------------------------------------------------------------	--------

EPSON

As MP200 with 136 columns.	299.00
----------------------------	--------

MP135

135 cps. 80 column printer. Friction tractor feed. NLO. Epson & IBM Compatible	126.00
--------------------------------------------------------------------------------	--------

MP480

480 cps dot matrix printer. 74 cps NLO. 80 column. Epson & IBM compatible. Std parallel	303.00
-----------------------------------------------------------------------------------------	--------

TAXAN KXP815

Taxan KXP 815 New enhanced KP 810 with 160 cps and fully Epson & IBM Compatible	260.00
---------------------------------------------------------------------------------	--------

TAXAN KZP915

Taxan KXP 915 New enhanced KP 915 with 180 cps and fully Epson & IBM Compatible	365.00
---------------------------------------------------------------------------------	--------

CITIZEN LSP 100P

120/25cps 80 column Centronics IBM Parallel	175.00
---------------------------------------------	--------

CITIZEN LSP 100S

120/25cps 80 column RS232 Serial	199.00
----------------------------------	--------

CITIZEN MSP 10E

160/40cps 80 column Centronics IBM Parallel	239.00
---------------------------------------------	--------

CITIZEN MSP 10E

160/40cps 80 column RS232 Serial	239.00
----------------------------------	--------

CITIZEN MSP 15E

160/40cps 136 column Centronics IBM Parallel	251.00
----------------------------------------------	--------

CITIZEN MSP 15E

160/40cps 136 column RS232 Serial	346.00
-----------------------------------	--------

CITIZEN MSP 15E

200/66cps 136 column dual interface	561.00
-------------------------------------	--------

PREMIER 35

Daisy Wheel 35cps 136 column Centronics IBM Parallel	434.00
------------------------------------------------------	--------

PREMIER 35

Daisy Wheel 35cps column RS232 Serial	494.00
---------------------------------------	--------

CITIZEN LASER

Overture 110	1303.00
--------------	---------

TECO VP1814

Overture 110	173.00
--------------	--------

NEC P2200 PINWRITER. High speed draft 168 cps. Standard draft 140 cps. Letter Quality 56 cps. You have to see it to believe it.

NEC P660

216/72cps 80 column Centronic/IBM Parallel	434.00
--------------------------------------------	--------

NEC P665

216/72cps 80 column RS232 Serial	486.00
----------------------------------	--------

NEC CP660

Colour 216/72cps 80 column Centronics/IBM Parallel	503.00
----------------------------------------------------	--------

NEC CP665

Colour 216/72cps 80 column RS232 Serial	573.00
-----------------------------------------	--------

NEC P760

216/72cps 136 column Centronics/IBM Parallel	520.00
----------------------------------------------	--------

NEC P765

216/72cps 136 column RS232 Serial	573.00
-----------------------------------	--------

NEC CP760

Colour 216/72cps 136 column Centronics/IBM Parallel	608.00
-----------------------------------------------------	--------

NEC 765

Colour 216/72cps 136 column RS232 Serial	660.00
------------------------------------------	--------

P6/CP6 Pin Tractor

P6/CP6 Bi-directional	50.00
-----------------------	-------

Tractor

P6/CP6 Cut Sheet Guide	104.00
P6/CP6 Cut Sheet Feeder	8.00
P7/CP7 Pin Tractor	90.00
P7/CP7 Bi-directional	74.00

Tractor 120.00

P7/CP7 Cut Sheet Guide	13.00
P7/CP7 Cut Sheet Feeder	231.00

EPSON PRINTERS

LX-800	199.00
FX-800	320.00
FX-1000	433.00
EX-800	399.00
EX-1000	545.00
LQ-800	430.00
LQ-1000	580.00
LQ-2500	865.00
SQ-2500	1126.00

PANASONIC KX-P3131

Fully Formed Serial Impact Daisywheel Printer. Print speed 17cps. Diablo compatible print wheels. Print pitches available are: 10, 12, 15 and proportional spacing. Standard friction feed and optional tractor. Standard Centronic optional RS232C. Built with 6K text buffer expandable to 32K buffer.	251.00
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------

BROTHER HR 20

Daisywheel 8K standard buffer tractor feed. NLO. Epson & IBM compatible. Std parallel	338.00
---------------------------------------------------------------------------------------	--------

JUKI Daisywheel

Juki 6100	286.00
-----------	--------

MP26 Daisywheel

Universal compatibility with almost all personal computers at an unbeatable price. Speed: 26 cps. 132 columns	216.00
---------------------------------------------------------------------------------------------------------------	--------

Diablo 630 compatible

Optional Tractorfeed	82.00
Optional Sheet feeder	126.00

GAKKEN GPR-2000

Print speed of 18 characters per second. Fully Oume compatible. Takes Oume exchangeable Daisywheel and ribbons. Selectable 10, 12, & 15 pitch. Supports proportional spacing. Standard friction feed. Tractor/cut sheet feeder and serial interface optional.	146.00
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------


SPECIAL OFFER

SAVE 29.00

**FREE PRINTER STAND
FREE BBC CABLE
200 SHEETS OF PAPER**


**When you buy a
Panasonic KX-P1081.**

The faster and enhanced KX-P1081. 120 cps in draft mode. 24 cps in NLO mode. Fully Epson RX80 and IBM Matrix and Graphics Printers compatible. Standard friction and tractor feed. Operator accessible print mode switch. Standard 8 bit parallel interface. RS232 interface is optional.



156.00

SPECIAL OFFER



PRINTER STAND

Fits nearly any width of printer. Allows paper storage and gives ideal viewing position. Can also be used for computers and monitors. Steel construction prevents bending or buckling.

8.00

**Take a holiday while your
Computer is being repaired.**

Or take out one of our repair contracts and be working before you can even get to the airport.

Twillstar Computers
Maintenance Division


Authorised Service Centre for
Amstrad and most IBM
Compatibles. 24 hour on site and
in house maintenance contracts
with loan equipment provided.

In house repair service on Disk
Drives, Printers, Modems, Systems
and monitors.

For further details call our
**Maintenance Hotline on
01-574 5271**

**CREDIT AVAILABLE
ON ALL ITEMS
CALL FOR DETAILS**

TWILLSTAR COMPUTERS LTD

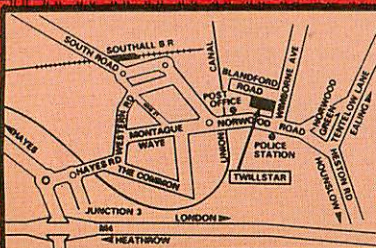

**APEX HOUSE
BLANDFORD ROAD
NORWOOD GREEN
SOUTHALL
MIDD UB2 4HD**
☎ 01-574 5271 or
☎ 01-571 5938
Telex: 25247 Telex G. attn TIL
Fax: 01-547 4326

You can purchase any of the items listed. All you have to do is write your requirements on a sheet of paper, and we will despatch your goods within 24 hours, subject to availability. Please add the following amounts for Postage and Packing.

Items below 10.00	add 1.50	Items below 50.00	add 2.50
Items below 100.00	add 3.50	Items over 100.00	add 8.00

(UK Mainland only) All prices exclude VAT. Please add 15% VAT to all orders. Prices correct at time of going to press but subject to change without notice. Please make cheques payable to: **TWILLSTAR COMPUTERS LTD.**
Access/Visa Card Holders: Welcome.
VISIT OUR MEGA-COMPUSTORE OPEN 9am - 6pm Monday to Saturday

EDUCATION FEATURE

A NEWSDAY is a project in which children produce their own newspaper in a day, working to deadlines, making editorial decisions, setting out pages and generally behaving like media people.

Having decided to go for this project our first need was to get together the necessary equipment. Setting this sort of thing up can be overawing, but we broke it down into two areas: Getting the news and printing it out.

First we would need that day's newspapers, then access to radios — especially one capable of getting World Service for its extensive news coverage. We would also need a computer linked to TTNS from which we hoped to get the bulk of our stories.

To this we added the school's two televisions which we had recently upgraded to include Teletext. We also got in touch with the local press to arrange for any major local story that should break — note the jargon — that day to be passed to us by phone.

For printing out the paper we used Typesetter from Sherston Software, as it seemed to be the right sort of level for 11 and 12 year-olds to cope with. Once set on the screen the page could be turned into either a Banda master or photocopied.

The Banda seemed a good idea because it was cheap and we would be able to use colour. Unfortunately, this option was ruled out by the fact that the pressure rollers of our printer — an Epson LX86 — put two lines down the centre of the master copy and we could find no way to overcome this. Photocopying was our only other option.

Now we had to prepare the children. A group was chosen to run the Typesetter software and given time on it. Others were practicing making up stories from several information sources while still others looked at how a newspaper was set out — different pages for different topics, headlines, how the most important stories were chosen and so on.

We also had yet others preparing features in advance.

Come the day, then, we would have our journalists waiting for the news to come in, news editors and sports editors eager to vet the stories, our typesetters poised to type them and several features ready to go.

We were equipped with several extra borrowed computers, two teachers released for the day — GRIST and shuffled classes — help from parents and an advisory teacher.

All this sounds difficult to organise,

Read all about it

How Marshal Anderson successfully survived his school's Newsday project

but given enough lead time it's all fairly straightforward. We had also arranged for a local newsagent to sell the papers from 4.30pm onwards — this gave us our deadline.

Finally the day dawned. Our main problem was space: Children were spread over quite an area with their TVs, radios and computers, so the first thing to break down was communication.

The editorial team shut itself in a classroom and sulked, mainly because, sad news though it was, the death of Eamon Andrews hardly seemed world-shattering. And they also discovered that if they short-circuited the system and gave their stories direct to the typesetters no one would veto what they had written. Until, that is, the typesetters started running out of space and began making their own minds up.

We really should have put the editors and typesetters together so that some coherence could have been introduced. This was confirmed by our sports editor, who took matters into her own hands and sat with the typesetters telling them exactly what she wanted, producing the best pages in the paper.

Things went fairly smoothly, with stories being taken off Teletext and hawked around the spaces available. Then an Iranian supertanker was hit by an Iraqi warplane at about the same time as a group of children arrived back from the local shops with their opinion poll on the army bullying case.

This seemed to concentrate everyone's minds — decisions now really had to be taken. A TTNS input on the Arab League summit was retrieved to go with the attack news, a leader also needed to be added about the army thing and this meant, with an eye to the clock, some things just had to go.

Once that had been sorted and we

Bradwell Times 5th Nov. 1987

Bradwell Times 15p

Three Die In Arson attack

After an arson attack last night three people died and three others were injured. The fire broke out in a house in the town of Bradwell at about 11.30pm. The fire spread rapidly and within minutes the house was completely surrounded by flames. The fire was caused by a faulty gas heater. The three people who died were a mother and her two young children. The mother was found dead in her bedroom. The two children were found dead in the living room. The third person who died was a neighbour who was killed by a falling chimney. The three people who were injured were taken to hospital. They are all expected to survive.

Star Dies

Last night television host Eamon Andrews died aged 40. He was found dead in his bed at his home in Dublin. He had been suffering from a heart condition. He was a well-known television personality and had been on the air for many years. He was married and had two children.

Iranian Tanker Bombed

An Iranian supertanker was hit by an Iraqi warplane at about 4.30pm. The tanker was carrying oil. It was hit in the hull. The ship was damaged and was leaking oil. The Iraqi warplane was shot down. The tanker was rescued by a British warship. The oil was pumped out of the ship. The tanker is now being towed to a port in Iran.

Army Bullying

A Colchester guardhouse is keeping tabs on a connection with the army. The man is held captive in the guardhouse. He is being held there because he is suspected of being involved in a plot to overthrow the government. He is being held there until he can be tried. He is being held there because he is a danger to the public.

School Crossword

Across:
1. It tells you what you are doing for the day (8)
6. You use it to make a list (4)
8. Make, English (4)
10. You use it if you are in a hurry (4)
12. You learn on these (5)
Down:
1. Part of a school (4)
2. The teacher writes on (4)
3. The pupil writes in (4)
4. The pupil writes in (4)
5. You draw lines with it (5)
6. They may be part of the school grounds (5)
7. The teacher writes on (4)
8. The pupil writes in (4)
9. The pupil writes in (4)
10. The pupil writes in (4)
11. The pupil writes in (4)
12. The pupil writes in (4)

STAR WORDSEARCH

Channel 4
1. The name of the channel (4)
2. The name of the channel (4)
3. The name of the channel (4)
4. The name of the channel (4)
5. The name of the channel (4)
6. The name of the channel (4)
7. The name of the channel (4)
8. The name of the channel (4)
9. The name of the channel (4)
10. The name of the channel (4)
11. The name of the channel (4)
12. The name of the channel (4)

Caine Says No!

Michael Caine said "No" to the offer of a knighthood. He said he did not want it. He said he was not interested in it. He said he was not going to accept it. He said he was not going to accept it. He said he was not going to accept it.

Howards Way

Howard's Way is a very exciting serial. It is a story of a man who is very rich and powerful. He is a man who is very rich and powerful. He is a man who is very rich and powerful. He is a man who is very rich and powerful. He is a man who is very rich and powerful.

Top Ten Singles

1. You Win Again
2. I Wanna Dance with Somebody
3. I Wanna Dance with Somebody
4. I Wanna Dance with Somebody
5. I Wanna Dance with Somebody
6. I Wanna Dance with Somebody
7. I Wanna Dance with Somebody
8. I Wanna Dance with Somebody
9. I Wanna Dance with Somebody
10. I Wanna Dance with Somebody

Killer Blankets

Police tested 4,000 electric blankets and found that 2 out of 3 could be lethal. The blankets were found to be faulty. The blankets were found to be faulty. The blankets were found to be faulty. The blankets were found to be faulty. The blankets were found to be faulty.

Points of View

Arnold Robinson of Points of View is a very good programme. It is a programme that is very good. It is a programme that is very good. It is a programme that is very good. It is a programme that is very good. It is a programme that is very good.

Going Live

Going Live is an excellent Saturday morning television programme. It is a programme that is very good. It is a programme that is very good. It is a programme that is very good. It is a programme that is very good. It is a programme that is very good.

Dolphin Dies in Gulf

A dolphin that was trained to perform tricks died in the Gulf. The dolphin was found dead. The dolphin was found dead. The dolphin was found dead. The dolphin was found dead. The dolphin was found dead.

Turn to Page 84 ►

EDUCATION FEATURE

◀ From Page 83

were all dashing about trying not to think about our missed lunches, a new problem became apparent. The typesetters were asking what numbers they should put on their pages. This was a problem as we had not planned an exact number, simply aimed at about 10, and naturally the first to be finished were features and sports which went at the back of the paper. The solution was, however, simple: We abandoned page numbers.

We worked on the principal that if there were enough worthwhile stories to fill a page then we would make that page. This was one place where teachers really had to take control because, as soon as a typesetting team had finished one page they just started another. By early afternoon we had three half-finished pages and not the time to complete all of them. At this point decisions became fairly arbitrary.

Up to now the only real technical problem had been with a printer which had caused a temporary bottle neck, but now real disaster threatened – the photocopier was not a happy machine

and was flashing its *replace master* light.

This was not really a problem in itself – the man was called to come and do it and the copies were still fine – it could wait. But then we ran out of toner and the calls became quite frantic. Fortunately the repair service was fairly swift and we breathed again, thankful for leasing agreements.

The final problem was totally unexpected. We were all rushing about, feeling quite pleased with ourselves – it was 4.15pm and we had the last pages ready for copying, when the newsagent rang: Who was responsible for this newspaper thing and why hadn't it arrived?

Apparently his fairly small shop was awash with quite large children coming to buy it and we reckoned about half an hour before we'd be ready. When I got to the shop I found the now ejected children spilling out into the road and tried everything from community singing to death threats until the paper – now nine pages long – finally arrived and was instantly sold out.

So what was its value? The children – more than 30 of them – had been in a

high-pressure, activity with a very tangible product at the end. The group dynamics gave them severe *lessons* in how to get on with others, or, in some cases, not.

Language work obviously came top in academic skills and using the typesetting software was a useful experience and a very real use of computers as a tool. The staff as a whole saw a clear justification for using computers and the parents saw the result of their fund raising to buy the machines.

Next time we would organise the space differently, spend more time developing the skills of preparing written work from several sources – much that went in this time was verbatim – and perhaps develop note-taking as we lost most of what came over the radio.

A very interesting point, however, is that very little of what we used came from TTNS: Teletext was the most fruitful source, and therefore schools without TTNS could quite happily undertake this sort of thing at any time – we certainly felt it was well worth the effort and we'll be at it again in March – so hold the front page!

**THE
MICRO
USER**

MAIL ORDER OFFERS

**THE
MICRO
USER**

MAIL ORDER OFFERS

SALE!

*This could be your last chance
to build up a library of fun and
knowledge from our back issues!*

The nine complete issues, April to December 1986:

Games: Mousetrap, Gouls of Azzod, Cavern Quest, 4-Site, Pendragon, Spacebase, Royal Wedding, Fruitworm, Pear Picker, Witch Hunt, Maltese Cross, Christmas Box, Santa's Sleigh. **Utilities:** Catalog II, Dual catalog, Safe save, Disc scanner, Mode 7 dumps, Text compressor, Special fonts, Slim characters, Dual screens, View ruler, Star print, Speech, Scroller, Flood fill, Break recover. **Education:** Multi-choice questions, Coloured lights, Shadows, Tables.

Only £6.90*

*Need a binder for
your magazines?
We'll send one
for £4.95*

* Price includes
p&p (UK only)

TO ORDER PLEASE USE THE FORM ON PAGE 159

Computers and Upgrades

Archimedes 305	£699.00 (a)
Archimedes 305 Mono System	£749.00 (a)
Archimedes 305 Colour System	£899.00 (a)
Archimedes 310	£775.00 (a)
Archimedes 310 Mono System	£825.00 (a)
Archimedes 310 Colour System	£975.00 (a)
Archimedes 310M	£835.00 (a)
Archimedes 310M Mono System	£885.00 (a)
Archimedes 310M Colour System	£1035.00 (a)
Arm Assembly Language Manual	£12.95 (e)
Master 128	£369.00 (a)
Master Compact	from £349.00 (a)
Master Turbo Upgrade	£99.00 (c)
Master 512 Upgrade	£189.00 (c)
Master 128 Eprom Cartridge	£11.00 (c)
Master 128 Dust Cover	£4.50 (e)
Compact RS 232 Interface	£26.00 (c)
Compact TV Modulator	£26.00 (c)
1770 Disc Interface	£41.00 (d)
ADFS ROM (B+ or B with 1770)	£25.00 (e)
B+64 64K Upgrade	£30.00 (d)

Trade in your old Model B against a new Master 128, Master Compact or Archimedes

Printers (Dot Matrix)

Epson LX800 80col/150cps + 22cps NLQ	£229.00 (a)
Citizen 120 D 80col/120cps + 25cps NLQ	£150.00 (a)
Citizen MSP10E 80c/160cps + 40 cps NLQ	£225.00 (a)
Citizen MSP50 80c/250cps + 60cps NLQ	£379.00 (a)
Star NL10 80col/120cps + 30cps NLQ	£199.00 (a)

Printers (Daisy Wheel)

Juki 6000 80col 12cps	£182.00 (a)
Juki 6100 110col 20cps	£280.00 (a)
Citizen Premier 35 132col 35cps	£554.00 (a)

Printers (Laser)

New Citizen Laser Overture 110
10 pages/min 250 Sheet cassette
dual interface. £1650.00 (a)

All printers include Free BBC cable
or plus £5.00 for IBM lead.

AMX Mouse and Software

AMX Mouse + Super Art	£60.00 (d)
AMX Pagemaker	£37.00 (d)

SPECIAL OFFERS

Printers - Dot Matrix

MP 165 80col/165cps + 38cps NLQ	£166.00 (a)
MP 200 80col/200cps + 40cps NLQ	£249.00 (a)
MP 201 136col/200cps + 40cps NLQ	£274.00 (a)

Printers - Daisy Wheel

MP 26 - 26cps Diablo 630 compatible	£234.00 (a)
MP 40 - 40 cps Diablo 630 compatible	£319.00 (a)
2 Year Warranty on MP Printers	

Gaken 16cps

£189.00

Disc Drives

Direct Drives all with full 3 yr. Warranty

0241 40/80T DS 400K	£99.00 (a)
0243 Dual 40/80T 800K (Horizontal)	£194.00 (a)
0246 40/80T DS 400K Inc PSU	£114.00 (a)
0248 Dual 40/80T 800K (Horizontal) Inc PSU	£214.00 (a)
0249 As 0248 in Master Bridge/Monitor Plinth	£229.00 (a)
0250 As 0248 with 1 x 3.5" & 1 x 5.25"	£239.00 (a)

UFD Drives (2 yr. Warranty)

MD 802 C Dual 40/80T DS 800K (Vertical)	£214.00 (a)
MD 802 E Dual 40/80T DS 800K Inc PSU	£244.00 (a)
MD 802 DM As above in Master Bridge/Monitor Plinth	£284.00 (a)

Winchester Drives

20 mb incl. PSU and ADFS	£549.00 (a)
40 mb incl. PSU and ADFS	£869.00 (a)



COMPUTING

BUSINESS SYSTEMS • HARDWARE
SOFTWARE • VIDEO SYSTEMS
MEDIA SUPPLIES
OFFICIAL DOMESDAY DEALER



ACORN APPROVED DEALER

Phone 0602 787923

Disc Drives

Misc

Viglen SS 40T 100K	£79.00 (a)
Discs 5.25" (Boxed in 10's Lifetime guarantee)	
3M 744 SS/DD 48TPI	£11.00 (d)
3M 745 DS/DD 48TPI	£13.00 (d)
3M 747 DS/DD 96TPI	£17.00 (d)
Add £1 for plastic library case	
B & S Label 96TPI in see through LIB. Case DS/DD	£13.00 (d)
Disc Cleaning Kit (state 5 1/4" or 3 1/2")	£9.00 (d)
3.5"	
3M 35SS SS/DD (Box of 10)	£21.00 (d)
3M 35DS DS/DD (Box of 10)	£29.00 (d)
B & S Label DS/DD	£19.00 (d)

Lockable Anti-Static 5.25" Storage Cases
70 Disc Capacity £9.00 (d)
100 Disc Capacity £10.00 (d)

Monitors

All Monitors include BBC Lead
Phillips Range of high resolution Mono Monitors
with Audio Input Green Amber or Paper White.

BM 7502 (Green)	£69.00 (a)
BM 7522 (Amber)	£74.00 (a)
BM7442 (Paper White)	£77.00 (a)

New Philips TV/Monitor, 15" Flat Screen, RGB,
Comp Video, 20 Channel TV £222.00 (a)

Phillips Colour Monitor RGB, Composite Video,
Audio In Linear RGB Green Screen Switchable
BBC/IBM Compatible CM8833 £230.00 (a)

Microvitec

1431 (Metal or Plastic Case please specify) Std. Res.	£179.00 (a)
1451 (Metal or Plastic Case please specify) Med. Res.	£224.00 (a)
1441 (Metal or Plastic Case please specify) High Res.	£375.00 (a)
1431 AP Metal Case RGB and CV/Audio Std. Res.	£209.00 (a)
1451 AP Metal Case only RGB and CV Audio Med. Res.	£259.00 (a)
TILT and SWIVEL Stands for Plastic Case Only	£19.00 (d)

Plinths

BBC B Single	£11.00 (c)
BBC Master Single	£12.00 (c)
BBC Master with Shelf	£22.00 (b)

UK Customers: please add 15% VAT to all prices
(including carriage).

Government and educational establishments official orders
welcomed. When ordering please enclose a cheque or postal
order for the appropriate amount, UK Carriage Rates (a) £8.50
- courier insured delivery (b) £3.50 (c) £2.50 (d) £1.50 (e)
£1.00. All prices are correct at time of going to press. All
offers are subject to availability, all prices are subject to change
without prior notification and are available on request. Current
price list is available on request.

Goods normally despatched on receipt of order.

B & S COMPUTING (NOTT'M) LTD
THE LENTON BUSINESS CENTRE
LENTON BOULEVARD
NOTTINGHAM NG7 2BY
PHONE: 0602 787923

ROM Boards

ATPL Sideways (state B or B+)	£34.00 (d)
Viglen ROM System (B Series)	£11.25 (d)
Viglen ROM System (Master 128)	£12.00 (d)
Viglen ROM System Compact	£12.00 (d)
Viglen Spare Cartridges	£2.50 (e)

Printer Ribbons and Accessories

Epson 8302 LX 86 Tractor Unit	£19.00 (c)
Epson LX 86 (Compat)	£2.89 (e)
Epson MX 80/RX 80/FX 80/FX 85/Compat	£2.50 (e)
Juki 5510/Citizen MSP 20 (Compat)	£2.50 (e)
Citizen 120D/LSP10	£3.75 (e)
Taxan 810/Canon (Compat)	£3.74 (e)
Juki 6100 Multistrike	£2.30 (e)
Tally MT85 Fabric	£5.00 (e)
Tally MT86 Carbon	£7.00 (e)
Printer lead 1.5m B/B+M128/ELK + 1	£6.00 (e)
Printer lead 1.5m Compact	£8.00 (e)
Printer lead 2m IBM or Compatible	£10.00 (d)
80col Printer Stand	£11.00 (c)
Universal Printer Stand	£15.00 (d)
Printer Switch Box 2 Way "T" Switch	£39.00 (c)

Modems

All Modems inc BBC Lead

Miracle WS2000	£95.00 (c)
Miracle WS4000 Hayes Compat	£144.00 (a)
Pace Nightingale + Commstar II	£94.00 (c)
Nightingale Auto Dial Auto Answer Board + SW	£52.00 (d)
Pace Commstar II ROM	£28.00 (e)

NB BAPT APPROVAL ON MODEMS ONLY

50ft. Telephone Extn. Cable on Wind up Reel	£9.50 (d)
---------------------------------------------	-----------

Software

Acorn Soft

Micro Prolog	£50.00 (d)	ISO Pascal	£42.00 (d)
Logo	£44.00 (d)	BCPL	£39.00 (c)
Forth Disc	£14.00 (e)	Comal	£32.00 (d)
Lisp	£33.00 (e)	Hi View	£37.00 (d)
View 2.1	£37.00 (d)	View 3.0	£39.00 (d)
Viewsheets	£37.00 (d)	View Store	£37.00 (d)
View Spell (80T only)	£29.00 (d)	View Plot	£21.00 (e)
View Index	£10.00 (e)	Overview	£84.00 (d)
View Printer Driver Gen. Tape	£7.00 (e)	Disc	£8.00 (e)

Computer Concepts

Interword	£39.00 (d)	Inter Sheet	£39.00 (d)
Interchart	£26.00 (d)	Interbase	£55.00 (d)

The Newly Released Spellmaster

Wordwise	£30.00 (d)	Wordwise +	£37.00 (d)
----------	------------	------------	------------

Mirrorsoft

Fleet Street Editor	£31.00 (d)	Fonts and Graphics	£11.75 (e)
---------------------	------------	--------------------	------------

Clares

Fontwise +	£16.00 (e)	Replica III	£11.00 (e)
------------	------------	-------------	------------

VINE MICRO REPLAY (State M/C and Disc Interface)	£30.00 (e)
--------------------------------------------------	------------

NB It is essential to state machine and 40/80T
when ordering software

Books (No VAT on books)

Master Ref. Manuals Pt1	£14.00 (d)	Pt 2	£14.00 (d)
Advanced Master Ref. Manual (Bray & Dickens)			£19.95
Lisp	£7.00 (e)	Forth	£7.00 (e)
BCPL	£14.00 (d)	View Guide	£6.00 (e)
View 3	£9.00 (e)	View Sheet	£9.00 (e)
		View Store	£9.00 (e)

Fanfold Paper and Labels


2000 x 1 Part 60gm 11 x 9.5" Std. Perf.	£11.00 (c)
2000 x 1 Part 60gm 11 x 9.5" Micro Perf.	£12.50 (c)
1000 x 1 Part 85gm 11 x 9.5" Std. Perf.	£9.00 (c)
1000 x 1 Part 90gm *Perfect* A4 Micro Perf.	£12.00 (b)
1000 89mm x 36mm Labels	£4.00 (d)
1000 89mm x 49mm Labels	£6.00 (d)
1000 102mm x 36mm Labels	£5.00 (d)

Please state Single or Twin Row. when ordering labels



FORMAT SERVICES

QUALITY PRODUCTS DESIGNED FOR EDUCATION, BUSINESS AND THE HOME USER



5.25" DISC DISPLAY/WORK FOLDER £6.99 (inc. P&P)

This product was originally designed for use with DESKTOP PUBLISHING SYSTEMS but recently many Educational and Business establishments have found it particularly useful, especially where work space is limited. Each folder opens out to reveal two rows of unwearable disc sleeves, 12 in total. These are carefully positioned to allow the top 30mm of each disc to be visible, thus aiding the easy identification of labels without having to thumb your way through plastic storage boxes. Folders measure 305 x 180mm approx (the same height as a normal A4 folder), and are attractively finished in red with a padded hardback cover. Extra disc labels are also supplied and each folder comes complete with its own plastic dust cover.


5.25" DISC DISPLAY/WORK BOARDS

Although similar to the display/work folder described above, this product is larger and is designed to hang on a wall, thereby allowing easy access to your discs and extra space around your work area. There are three versions of this board available.

Version 1 is capable of holding 24 5.25" discs£10.50 (inc. P&P)

Version 2 is capable of holding 16 5.25" discs, with a clip attached to hold A5 size paper (pictured)£10.99 (inc. P&P)

Version 3 is capable of holding 12 5.25" discs, with a wipe on/wipe off board£10.99 (inc. P&P)

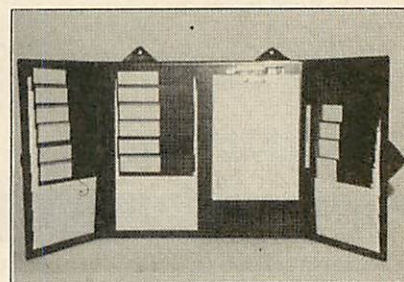

To order any of the above items or for further details of these and other products in our range, please send cheque/postal order to, or contact . . .

FORMAT SERVICES, P.O. BOX 422, CHRISTCHURCH, DORSET, BH23 4TA.

Tel: (04252) 5155



ZONEFOUR LIMITED

MIMIC IN FREE LIBRARY CASES

DS 96 TPI	10s	£7.60
FLIPSIDED	10s	£7.15
DS 48 TPI	10s	£6.80
UNIVERSAL	10s	£7.95

MIMIC 3.5"

SS	10s in Library Case	£13.55
DS	10s in Library Case	£15.95

5.25" BULK UNBRANDED DISKS LIFETIME GUARANTEE

	SS 48 TPI	SS 96 TPI	DS 48 TPI	DS 96 TPI
FULLY CERTIFIED	£4.75	£5.55	£5.55	£6.35
Try 10 and see	£9.60	£10.40	£10.40	£11.20
25	£18.40	£19.20	£19.20	£20.80
50	£33.60	£35.20	£35.20	£36.80
100	£76.00	£77.60	£77.60	£80.00
250	£144.00	£148.00	£148.00	£152.00
500				

RED, GREEN, BLUE, YELLOW, WHITE

10 in single colour or 2 of each - please state in large quantities your choice. (If stocks are available)* in library cases

3.5" BULK UNBRANDED DISKS 135 TRILIFETIME GUARANTEE

	SS	DS
10	£11.95	£13.55
25	£28.00	£32.00
50	£52.00	£64.00
100	£96.00	£120.00
250	£220.00	£280.00
500	£400.00	£520.00

SEND FOR OUR FREE PRODUCT CATALOGUE AND MEMBERSHIP DETAILS

ALL 5.25" DISKS HAVE REINFORCED HUB RINGS, SLEEVES, LABELS AND WRITE PROTECTS. ALL DISKS CARRY A LIFETIME GUARANTEE. ALL DISK PRICES INCLUDE VAT AND P/P. TO ORDER PLEASE CALL DIRECT DISK LINE: 10am-6pm



ZONEFOUR LIMITED

Unit 11, Mundells Court, Welwyn Garden City, Herts AL7 1EN. Telephone: (0707) 334460

All disks now sent 1st class or courier

Please Note: We can now offer you a duplicating service and in-house printing, packaging and most services, please telephone for a quotation on 0707 331076

Please call for bulk and seasonal prices and a full list of Paper, Labels, etc. etc. and new catalogue.

AMSOFT CF2 3"	10s	£20.00
MAXELL CF2 3"	10s	£20.00
3" MIMIC CF2DD	10s	£26.40

ACCESSORIES INC VAT

IBM/Amstrad PC1512 Printer Cable GPR10125 x cent	£7.15
Disk Notcher/doublers	£3.60
Disk Cleaners 3.5"	£3.95
5.25" Cleaner	£3.60
Mini Vac for printers and keyboards	£5.55

5.25" BULK COLOUR UNBRANDED

	SS 48 TPI	SS 96 TPI	DS 48 TPI	DS 96 TPI
FULLY CERTIFIED	£7.15	£7.95	£7.95	£8.75
10	£17.60	£19.20	£19.20	£20.80
25	£32.00	£36.00	£36.00	£38.40
50	£60.00	£64.00	£64.00	£68.00
100	£140.00	£152.00	£152.00	£160.00
250	£272.00	£208.00	£208.00	£300.00
500				

MIMIC HIGH DENSITY COBALT COATED 1.6 MEG SUITABLE FOR A.T.S.

10	50	100
£14.40	£64.00	£120.00
Verbatim preformed for use with Kodak 6.6 meg drive or equivalent (5 Pack)		£90.00

DISK BOXES INCLUDING VAT

5.25"	50 capacity	£6.95	100 capacity	£9.35
3.5"	40 capacity	£6.80	80 capacity	£9.55
3 3/4"	80/90 capacity	£9.55		
10 x 3.5" or 5.25" (library case)		£1.20		

SOFTWARE

We sell the full range of SAGE POPULAR SOFTWARE	
ABC. All in One Business Package	£150.00

VISA

Ceefax

Guide

Software is currently transmitted for a period of one week. The teachers' notes for the TV series Issues are transmitted from Wednesday to the following Tuesday and all other files are updated on Fridays. There will be periods during the update day when the files are unavailable. The program details given are provisional.

February 5 to 11

T/OSB13 B/OSB13

Osbits is a weekly series to help you understand assembler language. Part 13 takes a detailed look at multiplication, where the numbers being multiplied are both several bytes long – a process known as multi-precision arithmetic.

T/SWR15 Sounds

The sideways ram programming series continues with a look at multiple command interpreters – the method of allowing a SWR program to respond to any of a series of different star commands. The multiple command interpreter should accept commands shortened with a dot, and/or prefixed with an optional character.

Logic L/info

Use your micro to design electronic circuits. Logic allows you to create logic circuits on screen, then save them to disc or print them out on an Epson-compatible printer.

Lister1 Lister2 Lister3 Instruc File

Basic programs listed on a printer can be difficult to follow. Using LISTO 7 can improve their legibility, but it is still often difficult to find specific procedures or functions. Lister will solve all the problems by producing a very easy to read printout, with all procedures and functions clearly identified, and multi-statement lines separated.

Wampus

Explore the labyrinth and track down the Wampus in this classic game from the October 1984 issue of *The Micro User*.

February 12 to 18

T/OSB13 B/OSB13

A repeat of last week's Osbits module for the benefit of schools enjoying their half-term break.

T/SWR16 Help Trace

More from the series explaining how to make use of sideways ram. When a multiple command interpreter is used in a SWR utility, it is easy to forget the exact syntax of all the new commands. It is often useful for a SWR program to respond to the *HELP command by explaining the format of its new commands. The multiple command interpreter is introduced in this module.

Grabber GrabInf

Enter a selection of Ceefax page numbers and Grabber will find and save them all – including any rolling sub-pages. You can browse through the chosen pages at your leisure, or print them out if required.

BackUp I/Back

A rapid disc backup utility for use with a Master 128. Great time savings can be achieved for owners of single disc drives, with an 80 track DFS disc being copied in under two minutes involving just four disc swaps.

Dual

A two-player game from the November 1984 issue of *The Micro User*. It's high-packed action will keep you enthralled for hours.

the BBC Micro assembler. Part 14 studies the process of division in assembler language converting binary numbers to their Ascii representation by way of example.

T/SWR17 NoBasic

The rom images created in earlier modules of the sideways ram programming course have all been service roms. Language roms are introduced in module 17 with the example language NoBasic.

MyRom RomInfo

A rom image of a screen-to-printer routine for the BBC Master 128 computer. When you load it into sideways ram area, you will have instant access to screen dump routines – either text-only for most types of printer or full graphic routines for Epson-compatible printers. The printout produced is of the full screen with correct aspect ratio.

Intro Download Game Shapes Prog Title

One of the best, and most famous, computer games is Space Invaders. Here is your chance to re-capture the fun and excitement of this classic game. Can you destroy the invading alien army before they land?

Search

If data is on the disc, but you don't know where, this superb utility from the March 1985 issue of *The Micro User* will help you find it.

multi-byte division procedures where the division can be up to 32 bits long.

T/SWR18 RFSHead RFSGen Demo

The series for programmers using sideways ram continues with a study of the RSF – rom filing system. The RFS is available on all BBC Micro's with 1.0 operating system or higher. Any files – Basic, machine-code, text and so on – can be stored on rom and made permanently and instantly available. In order to store files this way they must be formatted with a block structure similar to that used by the cassette filing system. Module 18 of the course looks at how this is done, and offers a simple RFS interpreter and formatting program.

DateInf Datebas Dater

An automatic routine to date and time stamp all files when they are saved to disc from a BBC Master.

T/Strip M/Strip M/Spool

Two routines to save text from the View word processor in a form that can be used by any other word processor – even on a different type of computer. The programs operate as printer drivers, but send the output to disc rather than to paper, overcoming the problems of using the inflexible SAVE or SPOOL commands.

Rover

In this game from the January 1985 issue of *The Micro User* your aim is to guide Rover to his food before it's eaten by flies – avoiding the hostile cats en route.

February 19 to 25

T/OSB14 B/OSB14

Continuing the Osbits guide to

February 26 to March 3

T/OSB15 B/OSB15

The Osbits guide to the BBC Micro assembler part 15 explains

SOFTWARE AT BARGAIN PRICES

ED 1. GCE/CSE

MATHS 1
MATHS 2
ENGLISH
BIOLOGY
LINKWORD ITALIAN

£8

TRIPLE DECKERS – 3 Games on 1 Cassette for £1.99

- | | |
|-------------------------------------------|---------------------------------------------|
| 1. Grand Prix/Day at the Races/Manic Mole | 6. Cavern Capers/Snap Dragon/Castle of Sand |
| 2. Invasion Force/Haunted/Parachute | 7. Atom Smash/Knock Out/Reaction Tester |
| 3. Lunar Invasion/ Lander/Jam Butty | 8. Grebit/Mr. Freeze/Fruit Worm |
| 4. Howzat/Fishing/Golf | 9. Break Free/Missile Jammer/Code Breaker |
| 5. Starfight/Skrumble/Karate Warrior | |

CURRENT TITLES

	Cass	DISK
The Lost Crystal	9.95	11.95
Spellbinder	7.50	9.95
Life of Repton	5.50	6.50
Elixir	7.50	9.95
Bonecruncher	7.50	9.95
Despatch Rider	6.00	8.95
Impact	7.50	9.95
Ransack	7.50	9.95
Ziggy	6.00	8.95
Graham Gooch Cricket	6.50	9.95
Thunderstruck II	6.50	9.95
Sphere of Destiny	6.50	9.95
Spy v Spy	7.50	9.95
Phantom (Tynesoft)	6.50	9.95
Winter Olympiad	7.50	12.50
Village of Lost Souls	7.50	10.50
Project Thesius	7.50	10.50
Myrom	7.50	10.50
Entfiar Seven	—	14.95
Island of Xaan	7.50	10.95
Rick Hanson Trilogy	18.00	21.00
Play It Again Sam	7.50	9.95
Spitfire 40	7.50	10.95
Palace of Magic	7.50	9.95
Crazy Rider	7.50	9.95
Codename Droid	7.50	9.95
Repton 40 Screens	5.50	6.75
Revs + 4 Tracks	10.50	12.95
Grand Prix Construction	7.50	9.95
Repton 3	7.50	9.95
Superior Collection Vol1	7.50	9.95
Superior Collection Vol2	7.50	9.95
Sentinel	7.50	12.95
Cholo	—	15.25
Colossus Chess	7.50	12.95
The Hunt	7.50	10.95
Living Daylights	7.50	12.95
Paperboy	7.50	12.95
Omega Orb	6.50	10.50
ELite	10.50	10.95
Atar wars	7.50	10.95
Evening Star	7.50	—

NEW YEAR SPECIAL

10 DS/DD 96 TPI Discs
in

Library Case
£7.95

BARGAINS OF THE MONTH (Tapes)

- Power Pack (7 games) 4.99
Last of the Free 2.99
Genesis Project &
International Mega Sport 3.99
(Twin Tape)

SPECIALS ON DISC

- DUNJUNZ (Argus) 4.99
BUGBYTE COMPILATION 1 ... 4.99
BUGBYTE COMPILATION 2 ... 4.99
ROUNDHEAD (Argus) 5.99
WORLD WAR I 5.99
WAR (Martech) 4.50
FOOTBALLER OF THE YEAR 4.50

ATLANTIS (Tapes)

- Panik 1.99
Creepy Cave 1.99
Cops and Robbers 1.99
League Challenge 2.99
Survivors 2.99
Warehouse 2.99

BLUE RIBBON (Tapes) @ £1.99

- | | |
|-------------------|---------------|
| Video Card Arcade | Bar Billiards |
| 3D Dotty | Trapper |
| Return of R2 | Mango |

ALTERNATIVES (Tapes) @ £1.99

- | | |
|----------------|---------------------|
| Combat Lynx | Soccer Boss |
| Red Arrow | Olympic Spectacular |
| Dead or Alive | Crazy Herbert |
| Mine Shaft | Licence to Kill |
| Video Pinball | Moon Crestor |
| Micro Ball | Confusion |
| Rik the Roadie | Bird Strike |

BUGBYTE (Tapes) @ £2.50

- | | |
|-------------|---------------------|
| Plan B | Squeak Alizer |
| Ice Hockey | Star Force 7 |
| Tennis | Twin Kingdom Valley |
| Cricket | Village Pond |
| Dunjunz | Sky Hawk |
| Uranians | Roboto |
| Jack Attack | Hunky Dory |
| Mega Rock | |

TOWERHILL COMPUTERS LTD

1 Hockcliffe Road

Leighton Buzzard, Bedfordshire

Telephone: Leighton Buzzard (0525) 385329

ALL PRICES INCLUDE V.A.T. AND P&P. OVERSEAS ORDERS ADD £1.00



EDUCATION REVIEW

Exercise acts like a game

Product: XOR for Schools
Price: £31.63
Supplier: Logotron, Dales Brewery, Gwydir
Street, Cambridge CB1 2LJ.
Tel: 0223 323656

XOR for Schools, from Logotron is an adaptation of the XOR game. The original – which consisted of 15 levels of maze problems – has been extended to include a program for generating your own maze puzzles.

The package has two major parts: Game Player, which lets you play maze games, and Maze Designer, where you can design your own mazes. This is accompanied by an excellent manual.

Chapter one covers the thinking skills involved and chapter three informs on how one primary school went about using XOR. The middle chapter – Getting Started – gives the program instructions in a clear concise manner. A nice touch is that the suppliers send two copies of the program disc so one can be stored safely away in case little fingers damage the other one.

Linking the program with the curriculum is difficult. The program puts decision making and thinking skills first, and not as a byproduct of the work. The child is working in a micro environment and any knowledge imparted will be about the maze, the icons and their properties.

This, however, is educationally a sound practice: The children are motivated to think in a clear logical manner to solve a problem or develop one for others to solve.


When doing this a child has to establish aims, goals and objectives. Factors have to be considered and priorities listed after considering the alternative ways of tackling a problem.

The program is easy to use. After loading, an introductory screen appears, soon followed by an option screen. Options are then selected using the arrow keys, the ones chosen being largely dependent on the hardware available – dual drive, joystick and so on. The main menu then presents you with six options – play game, design maze, design icons, replay, screen dump and program exit.

Assuming you choose to play a game and are using a single drive, you must at this stage change to the data disc before selecting the game option. Another menu appears and you select the maze you wish to play. There are seven, graded in degrees of difficulty, each having a brief synopsis in the manual. Each has a title screen and indicates the progress being made. The

level of sound can be adjusted to suit. The graphics are very good and the bouncy tunes accompanying the games present a friendly environment.

At any stage you can press E to escape to the menu and see a controlled replay

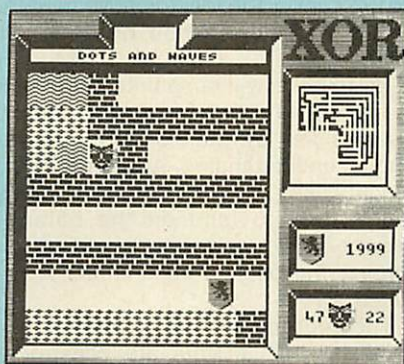

XOR learning screen

of what you have done, or if a suitable printer is available print a screen dump at the point you choose. The extension part of the program, Maze Editor and Icon Designer are both menu-driven.

Maze Editor lets you create your own mazes. You can select your own icons, place the map quartiles and position the

heroes to build up the labyrinth of puzzles. Once you have completed this the game can be saved on disc.

Should you wish, using the Icon Designer, you can edit or redesign the icons which appear in the game, although their original properties remain the same. For working off-screen a maze planner is provided so children can design mazes then test their skills on the computer.

Children familiar with this type of game enjoyed the tasks set, and those who had computers at home and had experienced games like Repton took quickly to the tasks.

They saw the program more as a game than an exercise. Although the manual indicates some of the mazes were designed by 11-year-olds, don't be fooled into thinking this is a definitive age for the program.

Sustained concentration and motivation is needed as the group may well spend at least an hour in any one session. The program appeals to a particular type of child: The competent user who enjoys the challenge of a computer-generated game with all the abstract situations this implies.

Andrew Heaton

Computers and science

Program: Technology and Design
Price: £24.95
Supplier: BBC Soft, PO Box 234, London
SE1 3TH.
Tel: 01-576 0548

TECHNOLOGY and Design is a computer-synchronised audio package designed to support the teaching of technology in secondary schools and it is excellent.

Computer-synchronised audio was pioneered four years ago by the BBC when it published its Introducing Science Extra series called Using Your Computer. The technique involves listening to a soundtrack on cassette while

using the computer as a display and as a way of exploring ideas. Keyboard responses keep the computer in synchronisation with the audio cassette.

The Technology and Design pack is made up of four 5.25in discs, two audio cassettes, a function key strip and a well-written user guide. It all forms part of a larger package comprising TV and radio programmes, a slide pack and teachers notes.

The materials cover five topics, pneumatics, structures, gearing and linkages, motors and electronic systems. Each topic has a section of the

Turn to Page 90 ►

EDUCATION REVIEW

◀ From Page 89

user guide, parts of which must be photocopied for the pupils' use.

The first topic is pneumatics and right from the opening titles, graphics and stereo sound effects, it exudes the kind of quality present throughout the package.

The pace is just right as you are taken through the fundamental concepts behind pneumatics and introduced to a variety of components and how they are used in systems. All the time the work is linked to practical applications in the world outside.

Investigating

Excellent graphics show how valves, pistons and restrictors can be used to build circuits to do a range of tasks. You are frequently encouraged to stop the audio tape to predict and investigate the ways in which the various screen models work.

The models are drawn alongside circuit diagrams which use conventional circuit symbols and change configuration as the model is operated.

The intention is not to replace practical experience of pneumatic components but to provide an introduction to the subject which can lead on to the real thing, and it succeeds well.

The software and soundtrack for the Structures section are not quite as good. Explanations are brief and there is a lot to hear, understand and do at quite a fast pace. Also the program doesn't tolerate some roms.

Creating structures out of steel, balsa, drinking straws or some other user-defined material is fiddly and involves a lot of function key pressing. Much practice is needed, and still the dreaded *Structure Unstable* appears above your newly-created 2D bridge without any hint of why. Brunel, how did you do it?

Simulating

However, once mastered, the software gives the budding engineer an opportunity to design and test a variety of 2D structures to destruction or otherwise. The model assumes straight, stiff and weightless beams with joints behaving as pivots with no resistance to movement. Forces can be chosen and then applied to the structure and the computer calculates the stresses in the beams and colours them accordingly.

The gearing and links section is not quite what you might expect from its title. It is a computer simulation of a

beam balance to illustrate the concept of forces acting at a distance – moments.

The screen shows a beam free to pivot at its centre and a selection of weights, or masses to be more precise. With the help of the cursor keys, weights can be picked up, placed on the beam at a variety of hooking points and their total effect on the beam observed. Well, almost.

Arrows on the screen show the direction of movement, and the digital display shows the net moment but the beam does not move. Arrows to show directions of movement are fine but they do not convey the feel for movement that is so important when dealing with moments.

However, any disappointment is more than compensated for by the balance puzzles set by the computer to test pupils' understanding. At the press of a function key weights fly crazily across the screen to land on the balance, leaving you to remove them without disturbing the beam's equilibrium. A nice touch.

The motors section is intended to show how DC motors are constructed and how they may be used and controlled. Once again the material relates theory to applications in the real world. The construction of motors is described and the interaction between magnets illustrated.

At the end of the presentation is a series of tasks involving the construc-

tion of actual circuits to solve specific switching problems. A list of components is included in the user guide.

The last section – electronic systems – uses a haunted stage to develop skills in designing electronic systems. I have never heard electronics introduced by a ghost before, but it certainly works.

The soundtrack grabs the attention and proceeds to give a clear and well-paced explanation of how things work together and what devices are required to produce an effect.

Controlling

Once again there is plenty of encouragement to stop the tape and experiment with the electronic system building blocks which can be moved around the screen and wired together.

Circuits constructed in this way can then be used to control the special effects needed for the on-screen stage performance. Vases can be made to fall, mice scurry, bat's fly and a toe may be waggled!

If you are looking to encourage an interest in technology, as well as teach it, I can do no more than recommend this package. It is no substitute for real hands-on experience – computer simulations never can be – but it provides a marvellous introduction to five important areas.

Frank Jukes

Working with words

MOST teachers would probably say that the single most useful piece of software is a word processor, of which there are a number of products for all ages from the simple, infant level up to the near-professional View, Interword and so on.

Soft-Teach has attempted to bridge a perceived gap by providing a simple to use word processor with a professional feel to it. The product, Quite Write is disc-based and comes packaged with an instruction book, function key strip and workcards. A second disc, called the document disc, carries the workcards which means you can print off extra cards at a minimal cost. The workcards are clear, well-written and can take a student through the basic operations of

Program: Quite Write

Price: £23.00

Supplier: Soft-Teach Educational, Sturges' Farmhouse, Longbridge Deverill, Warminster, Wiltshire BA12 7EA.

Tel: 0985 40329


word processing without the need to type in chunks of text.

By using the 10 cards, pupils should become proficient in such skills as loading Quite Write, entering and altering text, altering page layout, saving, re-loading and printing text. The guide is a model of what these books should be –

Turn to Page 92 ▶

SUPERIOR SOFTWARE GAMES

At LESS than 1/2 PRICE!

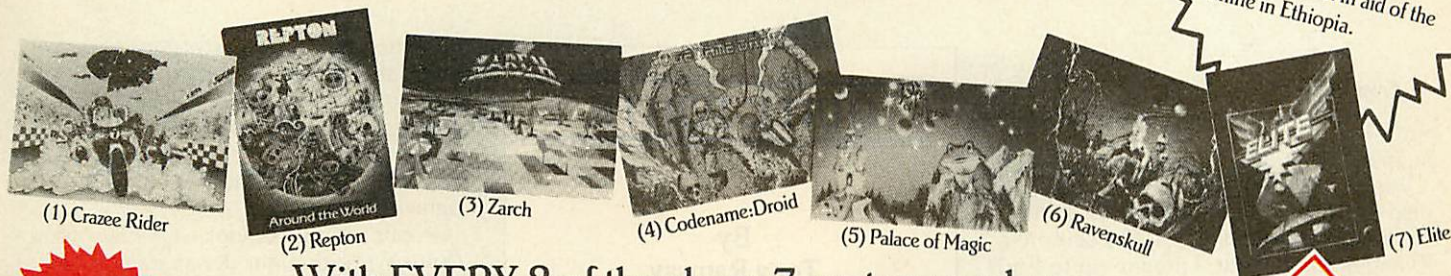

At least
£5 off
all Superior
Software's
games!!

With EVERY 2 of the above 7 posters you buy,
you may choose ANY 1 of the following Superior Software
games at less than 1/2 the recommended price!

These immensely popular and colourful posters are 2 feet long by
nearly 1 1/2 feet wide, and are yours for only **£1.95** each.

NEW
ELITE
A truly classic poster
of the world's most
addictive and best selling game.
A mindboggling
space adventure.

BBC or Electron CASSETTES	BBC or Electron 5 1/4" DISCS	Master Compact or Electron 3 1/2" DISCS
Only £1.95 (£6.95) each: The Life of Repton Repton Around the World	Only £2.95 (£7.95) each: The Life of Repton Repton Around The World (BBC only)	Only £3.95 (£9.95) each: The Life of Repton (MC only) Repton Around The World (MC only)
Only £3.95 (£9.95) each: Bonecruncher Spellbinder Play It Again Sam Elixir Palace of Magic Codename:Droid Crazee Rider Grand Prix Cons. Set (BBC only) Repton 3 Superior Coll. 1 or 2 (BBC only) Acornsoft Hits 1 or 2 Superior Coll. 3 (Elec. only)	Only £5.95 (£11.95) each: Bonecruncher Spellbinder Play It Again Sam Elixir Palace of Magic Codename:Droid Crazee Rider Grand Prix Cons. Set Repton 3 Superior Coll. 1 or 2 Acornsoft Hits 1 or 2 (BBC only)	Only £6.95 (£14.95) each: Bonecruncher Spellbinder Play It Again Sam Elixir Palace of Magic Codename:Droid Crazee Rider Grand Prix Cons. Set Repton 3 Superior Coll. 1 or 2 Acornsoft Hits 1 or 2 Superior Coll. 3 (Elec only) (MC only)
Only £6.25 (£12.95) each: Elite Revs & Revs 4 Tracks (BBC only)	Only £6.95 (£14.95) each: Elite (BBC only) Revs & Revs 4 Tracks (BBC only)	Only £9.95 (£19.95) each: Elite (MC only) Revs & Revs 4 Tracks (MC only) ZARCH (Archimedes only)

HOW TO ORDER

Simply fill in the coupon and send with a
cheque or postal order to Impact Posters.

- GUARANTEED despatch within 48 hours
- FREE postage and packing (by 1st class post)
(UK only. Overseas please add £2.50)
- Posters sent in strong postal tubes

To: Impact Posters, Neepsend House,
1 Percy Street, Sheffield, S3 8AU.

Please send me the following posters:—
(Tick or put quantity in relevant boxes)

Elite	<input type="checkbox"/>	(All only £1.95 each)
Repton	<input type="checkbox"/>	Palace of Magic
Zarch	<input type="checkbox"/>	Ravenskull
Codename:Droid	<input type="checkbox"/>	Crazee Rider

You may choose 1 game with EVERY 2 posters
you buy:

Game	Format (Cassette etc)	Computer
------	-----------------------	----------

.....
.....
.....

(BLOCK CAPITALS PLEASE)

Name

Address

.....

.....

.....

Post Code

Cost of Posters £

Cost of Game(s) £

I enclose a cheque/PO for £

(Cheques/POs payable to Impact Posters)

IMPACT
Posters

Impact Posters
Neepsend House
1 Percy Street
Sheffield
S3 8AU
Tel: (0742) 769950

EDUCATION REVIEW

◀ From Page 90

Soft-Teach has provided first rate support materials.

The word processor uses a Mode 7 display which sets a limit of 40 characters per displayed line, but the screen is a window on the text. Lines of up to 255 characters scroll smoothly sideways as you enter text or use the cursor keys.

The basic features of a word processor are obtained from menus. This has the big advantage that you do not need to remember commands. From menus it is possible to alter the page layout and the printer options. You can insert or delete text and move chunks of it about. The ability to find and replace words is also catered for.

One feature I immediately missed was the ability to centre or right-justify text. Without these, and with no page preview facility, it is hard to produce a good text layout.

Printing is straightforward, with the usual menu system allowing the selection from within the program, of different type styles for Epson-compatible prin-

QUITE-WRITE

By
Tony Ramsay
and
Anna Bartholomew

A WORD PROCESSOR THAT:

- is easy to use
- is professional
- introduces word processing.

ters. There is also a printer driver generator so that other printers can be accommodated. There are no facilities for enlarged or different fonts.

Quite Write uses the DFS system, as

do most schools, and ADFS users will need to perform a *DISC call before attempting to boot up the disc. Saved files can be read into my normal word processor but the only embedded command – underline text – is not recognized.

Pupils at my school who have tried Quite Write thought it was easy to use. Those who were unfamiliar with word processing have made good use of the workcards and have quickly grasped the required skills. They rapidly realise that the program has limitations and are then keen to move on to a more complex system.

Quite Write fulfils its aim of bridging the gap between the simple and the advanced word processor. It is easy to use, but with a number of limitations. A resourceful teacher will be able to provide workcards equivalent to those with this package, but suited to their existing program.

If Soft-Teach wish to sell this sound and useful product within schools, I feel they must select a lower and more realistic price.

Rog Frost

The truth about TELEX

How much does it cost to go on Telex?

You could go the conventional way and buy a dedicated Telex machine. The cheapest will cost you £1,604 (the Whisper), the dearest £2,892 (the Cheetah). You will also need a separate telephone line, costing £101 to install, plus £404 a year rental. That's a total outlay over the first year of a minimum of £2,109. (All prices include VAT.)

Or you could do what more and more BBC Micro users are doing – use your BBC Micro to double as a Telex machine. And just use your ordinary telephone!

How do I turn my BBC Micro into a Telex machine?

All you need is a modem and appropriate communications software (see the advertisements in this issue), a telephone, and a subscription to *MicroLink*. Telex is just one of a growing number of services available to micro users on *MicroLink*. You can also read the news as it happens, go teleshopping, create your own closed user group, send telemessages and electronic mail right round the world, download free programs directly into your micro . . . and much more.

But why use Telex?

Because it's a standard means of instant communication between businesses. Today there are 150,000 Telex machines in use in Britain – and more than 2 million worldwide. It's used to dramatically speed up business communications – it's just as quick as using the phone but far more efficient, because you have a hard copy of every "conversation" for your records.

But there's a big bonus you get when you use *MicroLink* for Telex that the conventional way doesn't offer.

With *MicroLink* you don't HAVE to be in your office to send or receive Telex messages. You can just as easily use your computer at home (or even a portable). So now you can check whether there are any Telex messages waiting for you – anywhere, anytime. How's that for your business efficiency?

**How to join:
Phone 0625 878888**

THIS program provides, among other things, a solution to the problem of memory corruption that occurs when issuing a *BACKUP or *COMPACT command. Ideally you need 32k of sideways ram, but a single 16k bank will suffice in certain cases which we will look at later.

Rom images saved on disc can be loaded into sideways ram and you may have a ram disc facility – but what else can be done with this extra memory?

There is a great deal of scope for using it creatively. Hide and Seek is one such example and the principle on which it operates can be extended to other tasks in which the sideways ram can be treated as a continuous addressable block of memory.

Before I get too technical, I'll describe what the system offers and how to use it.

It is a machine code patch which, once resident in your machine, provides the commands shown in Table 1. Upper and lower case may be freely mixed and only the first letter after the *LINE is actually significant.

The idea is to enable you to push the whole of user ram from PAGE – typically &1900 – to HIMEM – typically &7C00 – to the sideways ram so that routines that corrupt user ram can be used safely.

Consider this example: You have a program in memory which you wish to save on a disc. You discover that the

**Mark Scott presents a
useful utility to protect
memory by storing it
in unused sideways ram**

disc needs to be tidied up – perhaps deleting a few files and compacting – before you can save your program. This puts you in a spot, as the compaction routine will destroy your program.

The solution is provided by the Hide and Seek system. Issue a *LINE Hide command to save user ram, carry out the compaction, then recover the program – together with all variables, should any be in use – simply by issuing a *LINE Seek command.

Another routine that corrupts memory is the *BACKUP facility and Hide and Seek will avoid common problems here

too. *LINE Verify is provided so that you check that your sideways ram is functioning correctly.

It performs a search of all the possible banks that could contain it and for each found it performs a robust non-destructive test. Be warned, however, that *LINE Hide will corrupt much of the contents of sideways ram, overwriting any rom images for example – you can't have it both ways.

You must have at least two 16k banks of sideways ram to use the Hide and Seek facility properly, unless the size of user ram happens to be less than or equal to 16k.

With PAGE at &1900 and a 10k screen mode in use, the user ram is just less than 16k and one bank will do. With more than one bank, it does not matter if the banks are not in adjacent slots –

Turn to Page 94 ►

TECHNICAL DETAILS

When the operating system detects a *LINE command it indirects via the user vector userv at address &200,&201. This usually results in a Bad Command message being printed, but you can alter the vector to point at your own code.

On entry to the code, if the accumulator contains 1 it means a *LINE – rather than *CODE or unrecognised osword call – has been detected and the X and Y registers point to a memory location which is the start of the line of text that followed the *LINE command as a parameter.

In Hide and Seek only the first character is significant. Masking is used to ensure that the one character parameter is lower case and if no valid parameter is detected then a help message is printed out.

Each of the three routines – Hide, Seek and Verify – need to call the initialisation routine at line 970. This makes a note of the current language and then performs a scan to find which banks are sideways ram. It does this by attempting to write to each bank. If this fails then the bank

is taken not to be sideways ram.

As each ram bank is found, its actual number is entered into a lookup table. The first member – logical bank 0 – might be bank 4 in the case of a BBC Master and in this case actual banks 4,5,6,7 would be logical banks 0,1,2,3.

The underlying principle of the program is that two bytes can be used to address 64k of sideways ram memory, but the memory is in 16k banks that each occupy the same position in the machine's memory map.

Each bank starts at location &8000 and ends at &BFFF, but has a different bank number in the range 0 to 15. Given a general two byte address, you need to decide which logical bank should be accessed and then adjust the address to be in the range &8000–&BFFF. The selection routine – line 3040 – performs this essential

task. All that remains is to use the lookup table to determine the actual bank number for the operation.

The rest of the program is really an application of the main idea. The Hide routine reads the user ram from Page to Himem – these being determined using appropriate osbyte routines – and writes the data to the sideways ram.

The Seek routine performs the reverse process while the Verify routine takes each bank in turn and then subjects each location within the bank to the following test:

The original contents are saved, then an attempt is made to write binary 00000000 and read it back. If this works the same is done with binary 11111111. If the memory passes this test there cannot be much wrong with it, so the original contents are replaced and the process continues.

Command	Short form	Notes
*LINE		Lists the commands available
*LINE Verify	*LINE V	Finds and tests sideways ram
*LINE Hide	*LINE H	Saves user ram to sideways ram
*LINE Seek	*LINE S	Retrieves previously saved user ram

Table 1: Hide and Seek commands

UTILITY

◀ From Page 93

they need not be contiguous – the system will find and use them wherever they are.

Type in the listing and save it before you run it. Use of the checksum program is recommended to ensure that you have typed it in correctly. Once you have saved the program, run it and you should see the message:

```
Shall I save the code using:
*SAVE HScode 900 BDE 900
Save (Y/N)?
```

Answer Y to store the machine code on a utilities disc where you can find it in a hurry. You can safely install the system from disc without affecting your current program. Having done this, typing *HScode will install the system and print a start-up message. Check out the system by issuing a *LINE Verify, to check all the sideways ram banks.

Load a program – ideally a large one so that more than one bank needs to be used by the system – and use *LINE H to hide it. Type NEW to wipe it from user ram and then LIST to prove it has gone. If you now type *LINE Seek to get the program back and LIST to display it you'll find the program will have been returned from oblivion.

Note that the code is nearly three pages long and starts at &900. This

COMPATIBILITY

The program should work with any upgraded BBC B, B+ or on a Master 128. If a Solidisk upgrade is used, line 120 needs altering as detailed in the REM statements.

It will not work over the Tube because it writes directly to locations &FE30 and &FE32 in the I/O processor memory.

It is a trivial matter to use the legal operating system method to write to these locations – osword with A=6 –

but this slows the routine down considerably. You could arrange for these registers to be only accessed when the bank needed changing, but the extra code would make the program exceed the three pages available.

*Anyway, the system would be of very little use with a second processor, as the *COMPACT and *BACKUP routines only affect the I/O processor's memory.*

means that you will not be able to use the programmable function keys, as the program overwrites the area of memory that stores the key definitions. The cassette input and output buffers are also affected – see the Advanced User Guide for more details.

Cassette users will have to put the routine elsewhere, and one solution is to put the code at the usual Page value – &E00 for a normal cassette machine – and set Page higher than usual before doing any work with the user ram.

In the case outlined, Page would have to be at &1100 to make room for the system. Be warned, however, that pressing Break will reset PAGE to its default value and you will have to reset it to the higher value before proceeding.

NON-STANDARD SIDEWAYS RAM

Hide and Seek assumes that your sideways ram can be accessed by writing the required bank number to location &FE30, as is the norm. Solidisk uses another register – &FE32 – in this context. This register must also contain the bank number, for reasons that I shall not go into. If your sideways ram has any odd method of access, as specified in the documentation, then incorporate the appropriate code at lines 1100, 1350, 1820 and 3220.

```
10 REM Hide and Seek System
20 REM   by Mark Scott
30 REM   (c) The Micro User
40 REM -----
50 REM
60 REM Next line specifies where
70 REM the machine code starts.
80 code%=&900
90 REM Space for oscli procedure
100 DIM command 30
110 REM The Rom Select Register
120 romsel=&FE30
130 REM For Solidisk users, the
140 REM sideways ram access register
150 REM is at location &FE32
160 r_a_r=&FE32
170 REM Operating system routines
180 osasci=&FFE3:oscli=&FFF7
190 osnewl=&FFE7
200 osbyte=&FFF4:oswrch=&FFEE
210 REM Zero page workspace follows
220 actual_address=&70:REM and &71
230 swr_address=&72:REM and &73
240 ZPwbyte=&74
250 first_bank=&75
260 banks=&76
270 this_rom=&77
280 length=&78:REM and &79
290 mem_ptr=&7A:REM and &7B
300 userv=&200
310 REM Assemble the code
320 FOR pass=0 TO 2 STEP 2
330 P%=code%
340 [OPT pass
350 \ Make user vec point to our code
360 .redirect_userv
370 LDA#this_code MOD &100:STA userv
380 LDA#this_code DIV &100:STA userv+1
390 \ Print out intro help message
400 LDX#help MOD&100
410 LDY#help DIV&100
420 JSR message
430 RTS
440 \ Intercept code starts here
450 .this_code
460 CMP#1:BEQ star_line
470 RTS
480 .star_line
490 \ *line detected. XY points to
500 \ text following the command
510 STX mem_ptr:STY mem_ptr+1
520 \ Get the first character
530 LDY#0
540 LDA(mem_ptr),Y
550 \ Convert to lower case
560 \ if it happens to be upper case
570 ORA #&20
580 CMP#ASC'h':BEQ hide
590 CMP#ASC's':BEQ seek
600 CMP#ASC'v':BNE not_us
610 JSR verify_all_banks
620 RTS
630 .not_us
640 \ Print a help message
650 \ as no valid parameter detected
660 LDX#help MOD&100
670 LDY#help DIV&100
680 JSR message
690 RTS
700 .hide
710 \ Entry for main to swr transfer
720 JSR initialise
730 LDX#saving MOD &100
740 LDY#saving DIV &100
750 JSR message
760 \ transfer main memory to swr
770 CLC:JSR transfer
780 JSR reselect_lang
790 RTS
800 .seek
810 JSR initialise
820 \ Entry for swr to main transfer
830 SEC:JSR transfer
840 LDX#restoring MOD &100
850 LDY#restoring DIV &100
860 JSR message
870 JSR reselect_lang
880 RTS
890 .ram_table
900 \ Lookup table to convert
910 \ logical bank to actual bank
920 OPT FNequd(&FFFFFFFF)
930 OPT FNequd(&FFFFFFFF)
940 OPT FNequd(&FFFFFFFF)
950 OPT FNequd(&FFFFFFFF)
960 OPT FNequd(&FFF)
970 .initialise
980 \ This routine must be called
990 \ before the system is used.
1000 \ Get socket holding
1010 \ current language.
1020 LDA&F4:STA this_rom
1030 \ Now find the first swr bank
1040 \ by trying to write to each
1050 \ bank in turn.
1060 LDA#0:STA banks
1070 LDY#0:LDX#0
1080 .find_bank_loop
1090 \ Select a bank
1100 STY romsel:STY r_a_r
```



```

1110 \ Try two 'random' bytes.
1120 LDA &8000:PHA
1130 LDA &8001:PHA
1140 LDA #&69:STA &8000
1150 LDA #&42:STA &8001
1160 LDA &8000:CMP#&69:BNE not_swr
1170 LDA &8001:CMP#&42:BNE not_swr
1180 \ gets here if swr bank found
1190 TYA:STA ram_table,X:INX
1200 INC banks
1210 .not_swr
1220 PLA:STA&8001
1230 PLA:STA&8000
1240 INY
1250 CPY#16:BNE find_bank_loop
1260 LDA ram_table:STA first_bank
1270 JSR reselect_lang
1280 RTS
1290 .reselect_lang
1300 \ This routine must be called
1310 \ when the swr work is done with.
1320 \ Write to romsel again,
1330 \ to select language as on entry
1340 PHA:LDA this_rom
1350 STA romsel:STA r_a_r:STA &F4
1360 PLA:RTS
1370 .verify_all_banks
1380 \ Searches for SWR and performs
1390 \ a non-destructive robust test
1400 \ on all banks. Reports results.
1410 JSR initialise
1420 LDX#test MOD &100
1430 LDY#test DIV &100
1440 JSR message
1450 LDX#&FF:STX ZPwbyte
1460 .vfy_all_loop
1470 INC ZPwbyte
1480 LDX ZPwbyte
1490 LDA ram_table,X
1500 BMI all_done
1510 TAX:JSR verify_bank:PHP
1520 LDX#bank MOD &100
1530 LDY#bank DIV &100
1540 JSR message
1550 JSR nibble_out
1560 \ If carry set on exit from
1570 \ verify_bank bank failed verify.
1580 PLP:BCS failed_bank
1590 LDX#verified MOD &100
1600 LDY#verified DIV &100
1610 JSR message
1620 JMP vfy_all_loop
1630 .failed_bank
1640 LDX#not_verified MOD &100
1650 LDY#not_verified DIV &100
1660 JSR message
1670 JMP vfy_all_loop
1680 .all_done
1690 \ Print out number of banks found
1700 LDA ZPwbyte:JSR nibble_out
1710 LDX#banks_found MOD &100
1720 LDY#banks_found DIV &100
1730 JSR message
1740 JSR reselect_lang
1750 RTS
1760 .verify_bank
1770 \ Test ram bank specified by
1780 \ X register. Non destructive.
1790 \ Carry clear on exit if ok.
1800 \ Uses X,Y,and swr_address:pair
1810 PHA
1820 STX romsel:STX r_a_r
1830 LDA#0:STA swr_address
1840 LDA#&80:STA swr_address+1
1850 LDY#0
1860 .verify_loop
1870 LDA (swr_address),Y:PHA
1880 LDA#0:STA (swr_address),Y
1890 LDA (swr_address),Y
1900 CMP#0:BNE problems
1910 LDA#&FF:STA (swr_address),Y
1920 LDA (swr_address),Y
1930 CMP#&FF:BNE problems
1940 PLA:STA (swr_address),Y
1950 JSR inc_swr_address
1960 LDA swr_address
1970 BNE verify_loop
1980 LDA swr_address+1
1990 CMP#&C0 \ For 16K bank
2000 BNE verify_loop
2010 \ All 16K verified OK
2020 \ So exit with carry clear
2030 CLC:PLA:RTS
2040 .problems PLA
2050 \ Is a problem, exit carry set
2060 SEC:PLA:RTS
2070 .transfer
2080 \ If carry clear, hide
2090 \ If carry set, seek
2100 PHP
2110 \ Find value of himem and save
2120 LDA #&00:STA mem_ptr
2130 LDY#&FF:LDX#0:LDA#&B4:JSR osbyte
2140 STX mem_ptr+1
2150 \ Find value of oshwm and save
2160 LDA#&84:JSR osbyte
2170 STX actual_address
2180 STY actual_address+1
2190 \ Find num of bytes to transfer
2200 JSR calc_length
2210 \ *** Perform data transfer ***
2220 \ Carry clear for main to swr
2230 \ or set for swr to main
2240 LDY#0
2250 \ Zero swr_address
2260 STY swr_address:STY swr_address+1
2270 .tr_loop
2280 PLP:PHP
2290 BCS reading
2300 LDA(mem_ptr),Y:JSR write_swr
2310 JMP skip
2320 .reading
2330 JSR read_swr:STA (mem_ptr),Y
2340 .skip
2350 LDA swr_address
2360 CMP length:BNE more_to_transfer
2370 LDA swr_address+1
2380 CMP length+1:BNE more_to_transfer
2390 JMP exit_transfer
2400 .more_to_transfer
2410 JSR inc_swr_address
2420 JSR inc_mem_ptr
2430 JMP tr_loop
2440 .exit_transfer
2450 PLP
2460 RTS
2470 .calc_length
2480 \ Calculate length bytes as
2490 \ actual_address - mem_ptr - 1
2500 \ Result in length,length+1
2510 SEC
2520 LDA actual_address
2530 SBC mem_ptr:STA length
2540 LDA actual_address+1
2550 SBC mem_ptr+1:STA length+1
2560 LDA length
2570 SEC:SBC#1:STA length
2580 LDA length+1
2590 SBC#0:STA length+1
2600 RTS
2610 .write_swr
2620 \ Swr byte access routine.
2630 \ uses 'swr_address'
2640 \ a 16 bit address from &0000.
2650 \ Carry clear for write,
2660 \ Carry set for read
2670 \ First decide bank
2680 JSR bank_select
2690 LDY#0
2700 STA (actual_address),Y
2710 STA ZPwbyte
2720 \ Check write was ok
2730 LDA (actual_address),Y
2740 CMP ZPwbyte:BEQ written_ok
2750 BRK
2760 OPT FNequb(255)
2770 OPT FNequs("Failed")
2780 BRK
2790 .written_ok
2800 RTS
2810 .read_swr
2820 \ Main reading routine.
2830 \ Read to acc from 'swr_address'
2840 \ a 16 bit address from &0000.
2850 \ First decide bank
2860 JSR bank_select
2870 LDY#0
2880 LDA (actual_address),Y
2890 RTS
2900 .inc_swr_address
2910 INC swr_address
2920 BEQ inc_hi
2930 RTS
2940 .inc_hi
2950 INC swr_address+1
2960 RTS
2970 .inc_mem_ptr
2980 INC mem_ptr
2990 BEQ a
3000 RTS
3010 .a
3020 INC mem_ptr+1
3030 RTS
3040 .bank_select
3050 PHA
3060 LDA swr_address+1
3070 LDX#6
3080 .shift_loop
3090 LSR A
3100 DEX
3110 BNE shift_loop
3120 \ A is logical bank 0,1,2 or 3
3130 \ so select actual bank
3140 \ from lookup table
3150 TAX
3160 LDA ram_table,X
3170 \ If &FF read, bank is not swram
3180 BPL valid_bank:BRK:OPT FNequb(254)
3190 OPT FNequs("Out of sram"):BRK
3200 .valid_bank
3210 \ Select the bank
3220 STA romsel:STA r_a_r
3230 \ Now adjust the address to be
3240 \ in range &8000 to &BFFF by
3250 \ setting bits 8,7 of
3260 \ swr_address+1 to 1,0
3270 LDA swr_address:STA actual_address
3280 LDA swr_address+1
3290 ORA #&80 \ Binary 10000000
3300 AND #&BF \ Binary 10111111
3310 STA actual_address+1
3320 PLA
3330 RTS
3340 .nibble_out
3350 \ Output low nibble of Acc
3360 AND#&0F \ Just in case
3370 CLC:ADC#&C0

```

Turn to Page 96 ►

UTILITY

◀ From Page 95

```

3380 CMP#(ASC"9"+1)
3390 BPL abcdef
3400 JSR osasci:RTS
3410 .abcdef
3420 ADC#6:JSR osasci
3430 RTS
3440 .message
3450 \ XY points to message, ends &0
3460 PHA
3470 STX mem_ptr:STY mem_ptr+1
3480 LDY#0
3490 .output_loop
3500 LDA (mem_ptr),Y
3510 BEQ done_output
3520 JSR osasci:INY:JMP output_loop
3530 .done_output
3540 PLA
3550 RTS
3560 \ Messages follow,
3570 .saving
3580 OPT FNequs("Saving User Ram")
3590 OPT FNequb(&D):BRK

```

```

3600 .restoring
3610 OPT FNequs("Restored User Ram")
3620 OPT FNequb(&D):BRK
3630 .test OPT FNequs("Test banks:"):OPT
FNequb(&D):BRK
3640 .bank OPT FNequs("Bank "):OPT FNeq
ub(&D)
3650 .verified OPT FNequs(" OK"):OPT FN
equb(&D):BRK
3660 .not_verified OPT FNequs(" failed!
"):OPT FNequb(7):OPT FNequb(&D):BRK
3670 .banks_found OPT FNequs(" banks fo
und"):OPT FNequb(&D):BRK
3680 .help
3690 OPT FNequb(&D)
3700 OPT FNequs("SWR Utils"):OPT FNequb
(&D)
3710 OPT FNequb(&D)
3720 OPT FNequs("LINE Params")
3730 OPT FNequb(&D)
3740 OPT FNequb(&D)
3750 OPT FNequs("V Verify Swr")
3760 OPT FNequb(&D)
3770 OPT FNequs("H Hide Ram")
3780 OPT FNequb(&D)
3790 OPT FNequs("S Seek Ram")
3800 OPT FNequb(&D)
3810 OPT FNequb(&D)
3820 BRK
3830 .end_system

```

```

3840 J:NEXT
3850 CS="SAVE HScode "+STR$code%+" "+S
TR$end_system+" "+STR$redirect_userv
3860 PRINT"Shall I save the code usin
g:"
3870 PRINT"*CS
3880 PRINT"Save (Y/N)";
3890 INPUT YNS
3900 IF YNS="Y" OR YNS="y" THEN 3930
3910 PRINT"Not saved"
3920 END
3930 PROCoscli(CS)
3940 END
3950 DEF FNequb(b%)
3960 ?P%=b:P%=P%+1:=pass
3970 DEF FNequd(d%)
3980 !P%=d:P%=P%+4:=pass
3990 DEF FNequs(S$)
4000 $P%=$S:P%=P%+LEN($S):=pass
4010 DEF PROCoscli($command)
4020 X%=command MOD &100
4030 Y%=command DIV &100
4040 CALL oscli:ENDPROC

```



This listing is included in this month's tape & disc offer. See order form on Page 159.

10 = 0 0	460 = 3248 5	910 = 0 9	1360 = EC5C 1	1810 = 824E 1	2260 = B123 1	2710 = D74F E	3160 = 4679 7	3610 = 2943 6
20 = 0 0	470 = 9843 1	920 = E625 8	1370 = B46A 2	1820 = E5CC 0	2270 = DAF0 7	2720 = 0 E	3170 = 0 7	3620 = E0CF 5
30 = 0 0	480 = 8B57 D	930 = E625 8	1380 = 0 2	1830 = B31C 3	2280 = 5A4A A	2730 = D3E5 C	3180 = C13C B	3630 = DE3 0
40 = 0 0	490 = 0 D	940 = E625 3	1390 = 0 2	1840 = D7E A	2290 = 9413 A	2740 = 2CC4 3	3190 = 9364 6	3640 = AB33 4
50 = 0 0	500 = 0 D	950 = E625 7	1400 = 0 2	1850 = 9B97 9	2300 = 2A01 9	2750 = E2BF 2	3200 = 869A F	3650 = 74EA 9
60 = 0 0	510 = 5FE2 A	960 = 37CE F	1410 = 516E F	1860 = AF89 3	2310 = 557C 6	2760 = 3ACA C	3210 = 0 F	3660 = 6478 5
70 = 0 0	520 = 0 A	970 = 5B39 D	1420 = 9BAF F	1870 = EC3E 4	2320 = CD2 0	2770 = 93F9 0	3220 = ADA C	3670 = 7E52 C
80 = F179 9	530 = 9B97 5	980 = 0 D	1430 = 558C 7	1880 = 19EF 8	2330 = C45F E	2780 = E2BF 3	3230 = 0 C	3680 = 5B46 0
90 = 0 9	540 = ADAB 0	990 = 0 D	1440 = C092 5	1890 = 4844 8	2340 = BA0A A	2790 = F0C9 6	3240 = 0 C	3690 = DCFD 1
100 = 5D84 5	550 = 0 0	1000 = 0 D	1450 = 2CDA F	1900 = 7A58 8	2350 = 409E D	2800 = 9843 7	3250 = 0 C	3700 = B548 2
110 = 0 5	560 = 0 0	1010 = 0 D	1460 = 9C63 D	1910 = 13B4 5	2360 = 6E39 4	2810 = 4468 F	3260 = 0 C	3710 = DCFD 5
120 = FB31 6	570 = 806B 6	1020 = C3C2 4	1470 = 74D7 F	1920 = 4844 7	2370 = 93D5 9	2820 = 0 F	3270 = 670B 8	3720 = F707 F
130 = 0 6	580 = FB47 F	1030 = 0 4	1480 = 1759 F	1930 = D043 6	2380 = E3DF F	2830 = 0 F	3280 = 93D5 B	3730 = DCFD 4
140 = 0 6	590 = D628 A	1040 = 0 4	1490 = 4679 0	1940 = 587B 9	2390 = 8541 D	2840 = 0 F	3290 = 192B 2	3740 = DCFD 6
150 = 0 6	600 = B300 6	1050 = 0 4	1500 = 7B62 B	1950 = ADCD C	2400 = 2459 A	2850 = 0 F	3300 = 9885 5	3750 = 51B2 6
160 = 134F A	610 = 408E F	1060 = 2CED A	1510 = C0AD 8	1960 = 409E E	2410 = ADCD 7	2860 = E5EF 5	3310 = 32B8 0	3760 = DCFD 4
170 = 0 A	620 = 9843 6	1070 = 4971 D	1520 = 7B68 4	1970 = 962 D	2420 = 370A D	2870 = 9B97 F	3320 = 4E8A F	3770 = 1F34 1
180 = D5 E	630 = BCC3 1	1080 = 19FC B	1530 = B5CB 1	1980 = 93D5 D	2430 = F40F F	2880 = D3E5 0	3330 = 9843 7	3780 = DCFD 9
190 = FE7F 6	640 = 0 1	1090 = 0 B	1540 = C092 D	1990 = EA6C 3	2440 = 6A45 D	2890 = 9843 C	3340 = D1BD F	3790 = 6226 B
200 = 2DD3 7	650 = 0 1	1100 = AD9C B	1550 = DBEA 2	2000 = 962 5	2450 = 4C9A 6	2900 = CF75 0	3350 = 0 F	3800 = DCFD 7
210 = 0 7	660 = FF61 8	1110 = 0 B	1560 = 0 2	2010 = 0 5	2460 = 9843 3	2910 = E2BF 5	3360 = 643C F	3810 = DCFD 3
220 = E445 1	670 = B897 C	1120 = 38B3 6	1570 = 0 2	2020 = 0 5	2470 = 687 6	2920 = 68B7 E	3370 = 2692 8	3820 = E2BF F
230 = 94EA 6	680 = C092 A	1130 = 92E2 F	1580 = E61D 1	2030 = E02A 0	2480 = 0 6	2930 = 9843 D	3380 = EEE F	3830 = B3AD 2
240 = C686 6	690 = 9843 2	1140 = B2F 6	1590 = D3E6 0	2040 = D855 7	2490 = 0 6	2940 = 520D A	3390 = 13DB A	3840 = DA42 2
250 = DB63 0	700 = E51A A	1150 = C790 2	1600 = 4844 0	2050 = 0 7	2500 = 0 6	2950 = DC8A 3	3400 = 2BF 7	3850 = 5CA0 F
260 = F1CB A	710 = 0 A	1160 = 445E F	1610 = C092 8	2060 = 9019 1	2510 = 8D00 4	2960 = 9843 B	3410 = 6683 8	3860 = A6D7 F
270 = 82E5 4	720 = 516E 6	1170 = A395 3	1620 = 10DC D	2070 = 19CC C	2520 = C396 4	2970 = C140 E	3420 = F7D9 3	3870 = 1311 D
280 = 245D 5	730 = B57B F	1180 = 0 3	1630 = ED0F C	2080 = 0 C	2530 = C4E 0	2980 = E233 F	3430 = 9843 4	3880 = 5385 6
290 = 79F2 F	740 = 90C7 5	1190 = DE31 A	1640 = 6631 C	2090 = 0 C	2540 = 5C16 1	2990 = 94AD A	3440 = 8868 D	3890 = 8415 4
300 = D7D7 3	750 = C092 6	1200 = AED5 A	1650 = 3887 F	2100 = 805E 7	2550 = 885 5	3000 = 9843 A	3450 = 0 0	3900 = E56D 9
310 = 0 3	760 = 0 6	1210 = 85E6 E	1660 = C092 8	2110 = 0 7	2560 = 2B97 A	3010 = 596E D	3460 = 824E E	3910 = E9AD A
320 = B43B 9	770 = 156A 0	1220 = D660 3	1670 = 10DC A	2120 = DAAC D	2570 = D97A C	3020 = 8C8E 8	3470 = 5FE2 2	3920 = FD2E 9
330 = 7B 4	780 = 6F2C 1	1230 = C641 5	1680 = EBFE D	2130 = 54F E	2580 = D52C 2	3030 = 9843 D	3480 = 9B97 0	3930 = FAED 0
340 = 4E48 6	790 = 9843 F	1240 = 6623 3	1690 = 0 D	2140 = BEFD 2	2590 = F5C 7	3040 = 13A5 B	3490 = 8B6A 9	3940 = FD2E 3
350 = 0 6	800 = 473C 8	1250 = 4038 6	1700 = 7A25 1	2150 = 0 2	2600 = 9843 4	3050 = 824E A	3500 = 2065 F	3950 = A774 3
360 = 2BC3 E	810 = 516E B	1260 = 359E 8	1710 = FFF0 6	2160 = 1AE8 C	2610 = 2BD5 4	3060 = 93D5 6	3510 = 1C91 7	3960 = E52D 3
370 = 4738 3	820 = 0 B	1270 = 6F2C 8	1720 = 4103 2	2170 = B479 1	2620 = 0 4	3070 = CC61 5	3520 = FABC A	3970 = D851 2
380 = 2F2D B	830 = BF09 6	1280 = 9843 7	1730 = C092 A	2180 = 3128 C	2630 = 0 4	3080 = 77D5 D	3530 = CFAB D	3980 = 3771 8
390 = 0 B	840 = A11E D	1290 = 3FC5 4	1740 = 6F2C E	2190 = 0 C	2640 = 0 4	3090 = 1A09 C	3540 = 4E8A 2	3990 = C8DB 8
400 = FF61 C	850 = DA6F 6	1300 = 0 4	1750 = 9843 7	2200 = F0CD 3	2650 = 0 4	3100 = E8A9 8	3550 = 9843 6	4000 = 2FF3 B
410 = B897 7	860 = C092 3	1310 = 0 4	1760 = 86B9 5	2210 = 0 3	2660 = 0 4	3110 = F4D2 3	3560 = 0 6	4010 = DE97 6
420 = C092 E	870 = 6F2C D	1320 = 0 4	1770 = 0 5	2220 = 0 3	2670 = 0 4	3120 = 0 3	3570 = 30FD B	4020 = 204E B
430 = 9843 E	880 = 9843 C	1330 = 0 4	1780 = 0 5	2230 = 0 3	2680 = E5EF F	3130 = 0 3	3580 = B666 0	4030 = BBEC E
440 = 0 E	890 = 7700 9	1340 = E627 9	1790 = 0 5	2240 = 9B97 A	2690 = 9B97 8	3140 = 0 3	3590 = E0CF F	4040 = C3BF 1
450 = 4977 D	900 = 0 9	1350 = D970 F	1800 = 0 5	2250 = 0 A	2700 = AFE4 5	3150 = 670E E	3600 = 553B 4	

READER'S SURVEY

£1000 Over in prizes

Help celebrate our birthday – win a fabulous prize!

This month marks The Micro User's fifth birthday. To celebrate the occasion we've got seven top-class prizes worth over £1,000 for you to win. All you have to do is answer as many questions as you can in the questionnaire below.

Add your name and address if you want to be eligible for the draw, then send off the form (no stamp is required). The senders of the first seven forms to be pulled from the sack on March 31 will each receive a prize.

THESE ARE THE PRIZES:

MicroLink multi-speed modem

This powerful top-of-the-range modem offers three speeds: 1200/75, 300/300 and 1200/1200. It includes such extra features as auto-dial and auto-answer. Software included.

Value: **£169**

Watford's 32k Shadow Ram PLUS Interword

Add an extra 32k of ram to your BBC Micro. As well as this superb addition to any machine there is also a copy of Interword, the powerful word processor from Computer Concept's best-selling Inter family.

Value: **£98**

Tynesoft games bundle

A bundle of 16 top titles from Tynesoft including their latest releases Winter Olympiad 88 and Indoor Sports, plus such winners as Spy Vs Spy, Phantom, Jet Set Willy II, Future Shock and The Big KO.

Value: **£140**

Cambridge Computer's Z88



A versatile portable micro with superb built-in software: BBC Basic, word processor, database, terminal emulation, filer, diary and calculator. The Z88 now has its own section in the Micro User to help you make use of its full potential.

Value: **£287.50**

Morley Teletext Adapter

Access more than 1,000 pages of Teletext information and download the free telesoftware. Features auto-tuning, and comes with a 16k ATS rom and a 16k utilities rom.

Value: **£119.95**

Permanent Memory System's Genie PLUS utilities disc

A neat, easy-to-use plug-in board which gives you an address book, calendar, calculator, desk diary, notepad and phone book at the press of a key – and all while using other programs.

Value: **£89.30**

MicroLink dual-speed modem

Connect your BBC Micro to the outside world! This superb modem works at 300/300 and 1200/75 and comes complete with easy-to-use communications software.

Value: **£99**

Please tick your reply in the boxes provided. You don't have to fill in an answer if you don't want to. You may photocopy this page to protect your magazine if you wish.

ABOUT YOU

How old are you?

- | | |
|-----------------------------------|----------------------------------|
| <input type="checkbox"/> Under 11 | <input type="checkbox"/> 23 - 30 |
| <input type="checkbox"/> 11 - 15 | <input type="checkbox"/> 31 - 39 |
| <input type="checkbox"/> 16 - 18 | <input type="checkbox"/> 40 - 50 |
| <input type="checkbox"/> 19 - 22 | <input type="checkbox"/> Over 51 |

Sex? M / F

Occupation? _____

What area of computers or computing interest you?

	Very much	A little	Not at all
Business	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Arcade Games	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Adventures	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Comms	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Programming	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hardware	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Future Tech	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Learning about:			
Programming	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hardware	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

How do you rate your knowledge of:

	None	Poor	Average	Good	Excellent
Basic programming	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6502 Machine code	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ARM code	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hardware	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

ABOUT YOUR MICRO

What micro(s) do you own or use?

- | | |
|-------------------------------------------|-------------------------------------|
| <input type="checkbox"/> BBC Model A or B | <input type="checkbox"/> BBC Master |
| <input type="checkbox"/> BBC Compact | <input type="checkbox"/> Electron |
| <input type="checkbox"/> Archimedes | <input type="checkbox"/> Z88 |

How long have you had a BBC Micro?

- | | |
|---------------------------------------|------------------------------------|
| <input type="checkbox"/> Under 1 year | <input type="checkbox"/> 1-2 years |
| <input type="checkbox"/> 2-3 years | <input type="checkbox"/> 3+ years |

Do you have any other computer? Yes/No

Which one(s)? _____

Turn to Page 98 ▶

◀ From Page 97

Are you thinking of buying another computer? Yes/No

Which one? _____

What other hardware do you have?

- | | |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/> Monitor | <input type="checkbox"/> Colour <input type="checkbox"/> Monochrome |
| | Make _____ |
| <input type="checkbox"/> Disc drive | <input type="checkbox"/> 40 <input type="checkbox"/> 80 <input type="checkbox"/> Single <input type="checkbox"/> Double |
| | Make _____ |
| <input type="checkbox"/> Printer | <input type="checkbox"/> Daisywheel <input type="checkbox"/> Dotmatrix <input type="checkbox"/> Laser |
| | Make _____ |
| <input type="checkbox"/> Modem | Make _____ |
| <input type="checkbox"/> Sideways ram | Make _____ |
| <input type="checkbox"/> Teletext | Make _____ |
- Please list any others: _____

What type of hardware would you like next for your micro?

Please indicate which of the following types of software you have:

- | | |
|-----------------------------------------|------------------------------------------|
| <input type="checkbox"/> Word processor | <input type="checkbox"/> Spreadsheet |
| <input type="checkbox"/> Database | <input type="checkbox"/> Other languages |
| <input type="checkbox"/> Assembler | <input type="checkbox"/> Basic utilities |
| <input type="checkbox"/> Disc utilities | |

What type of software are you most likely to buy next for your micro? _____

What do you use your BBC Micro for (fill in your own ideas in the spaces at the end of the list)?

	Only	Mostly	Some	Seldom	Never
Arcade games	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Adventure games	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Programming	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Business	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Own letters	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Home accounts	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
.....	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

What software do you use most frequently? _____

Is there any software (apart from games) you've bought that you never use? _____

THE MAGAZINE

How long have you been reading *The Micro User*?

- | | | |
|-------------------------------------|-------------------------------------|---------------------------------------|
| <input type="checkbox"/> 0-3 months | <input type="checkbox"/> 4-6 months | <input type="checkbox"/> 7-12 months |
| <input type="checkbox"/> 1-2 years | <input type="checkbox"/> 2-3 years | <input type="checkbox"/> from issue 1 |

How often do you buy *The Micro User*?

- | | | |
|--------------------------------------|---------------------------------|-----------------------------------------|
| <input type="checkbox"/> Every issue | <input type="checkbox"/> 1 in 2 | <input type="checkbox"/> Less regularly |
|--------------------------------------|---------------------------------|-----------------------------------------|

How do you get *The Micro User*?

- | | |
|------------------------------------------|------------------------------------|
| <input type="checkbox"/> Subscription | <input type="checkbox"/> Newsagent |
| <input type="checkbox"/> Computer dealer | <input type="checkbox"/> A friend |

How many other people read your copy of *The Micro User*?

- | | | | | |
|-------------------------------|----------------------------|----------------------------|----------------------------|--------------------------------------|
| <input type="checkbox"/> None | <input type="checkbox"/> 1 | <input type="checkbox"/> 2 | <input type="checkbox"/> 3 | <input type="checkbox"/> more than 3 |
|-------------------------------|----------------------------|----------------------------|----------------------------|--------------------------------------|

What other computer magazines do you regularly buy? _____

What do you like most about *The Micro User*? _____

What do you like least about *The Micro User*? _____

How often do you buy the magazine cassette or disc?

- | | | |
|--------------------------------------|---------------------------------------|--------------------------------|
| <input type="checkbox"/> Every month | <input type="checkbox"/> Occasionally | <input type="checkbox"/> Never |
|--------------------------------------|---------------------------------------|--------------------------------|

If occasionally, what prompts you to buy it? _____

Which program listings do you type in?

	Usually	Sometimes	Never
Games	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Utilities	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Tutorials	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Educational	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

What is the maximum length of listing you would want to type in?

- | | | |
|------------------------------------|----------------------------------|----------------------------------|
| <input type="checkbox"/> Half page | <input type="checkbox"/> 1 page | <input type="checkbox"/> 2 pages |
| <input type="checkbox"/> 3 pages | <input type="checkbox"/> 4 pages | <input type="checkbox"/> 5 pages |

Please circle the number which matches your level of interest in the following subjects (0 least — 9 most):

News	0	1	2	3	4	5	6	7	8	9
Software reviews	0	1	2	3	4	5	6	7	8	9
Hardware reviews	0	1	2	3	4	5	6	7	8	9
Body Building	0	1	2	3	4	5	6	7	8	9
Communications	0	1	2	3	4	5	6	7	8	9
Problems solved	0	1	2	3	4	5	6	7	8	9
Library	0	1	2	3	4	5	6	7	8	9
Mad Hatter	0	1	2	3	4	5	6	7	8	9
Hac Man	0	1	2	3	4	5	6	7	8	9
Letters	0	1	2	3	4	5	6	7	8	9
Education	0	1	2	3	4	5	6	7	8	9
Business	0	1	2	3	4	5	6	7	8	9
Spreadsheets	0	1	2	3	4	5	6	7	8	9
Games programs	0	1	2	3	4	5	6	7	8	9
Utilities programs	0	1	2	3	4	5	6	7	8	9
Archimedes	0	1	2	3	4	5	6	7	8	9
Z88	0	1	2	3	4	5	6	7	8	9
Offers	0	1	2	3	4	5	6	7	8	9
Pull out features like Repton	0	1	2	3	4	5	6	7	8	9

Indicate any articles or series you would like to see in future editions of *The Micro User*. _____

Any other comments you would like to make about *The Micro User*. _____

SHOWS

Did you attend an Electron & BBC Micro User show in 1987?

- | | |
|------------------------------|-----------------------------|
| <input type="checkbox"/> Yes | <input type="checkbox"/> No |
|------------------------------|-----------------------------|

Please circle the number that matches what would attract you to come to a show in 1988 (0 least — 5 most):

New products	0	1	2	3	4	5
Bargain offers	0	1	2	3	4	5
Technical advice	0	1	2	3	4	5
Hands on testing	0	1	2	3	4	5
Show themes/theatre	0	1	2	3	4	5

Anything else not mentioned here? _____

Thank you for filling in this survey. Now send it to: **Reader Survey, The Micro User, FREEPOST, Europa House, Adlington Park, Adlington, Macclesfield SK10 5NP. No stamp required.**


If you wish to take part in the Prize Draw please fill in your name and address.

Name: _____

Address: _____

Post code: _____


OPUS DRIVES A BETTER BARGAIN

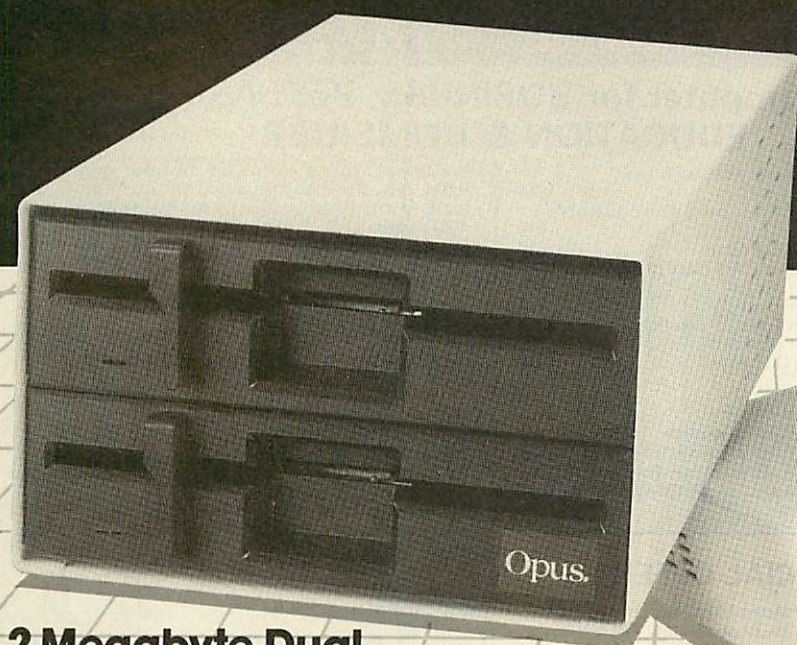

**2 Megabyte Dual
Drive**

Only £209.95

5 1/4" double-sided 80/40 track hardware
switchable. Formatted capacity with
DDOS 1.4 Mb.

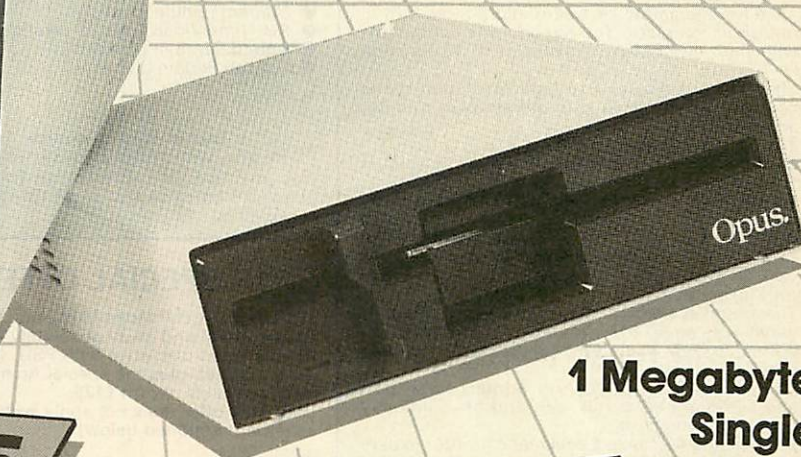

**1 Megabyte
Single
Drive**

Only £109.95

5 1/4" double-sided 80/40 track hardware
switchable. Formatted capacity with
DDOS 720 K.

Whichever way you look at it – price or performance – these 1 and 2 Megabyte disc drive bargains from Opus take some beating. With prices that include VAT and FREE delivery anywhere in mainland Britain, it's hardly surprising they're Opus best-sellers.

Quality Opus Disc Drives

As a major supplier of disc drive products to the home, education and business markets in Britain, the Opus name is your guarantee of quality. Both our drives feature reliable direct drive mechanisms, lower power consumption and fast track access times.

The Opus DDOS

Choose either of our special drive bargains and we'll reduce the price of our double density disc interface by a third! It's yours for just £40 instead of the normal asking price of £60.

The Opus DDOS uses the BBC B+ disc controller chip for compatibility with all leading software titles. It can also handle tape to disc transfers, includes Format and Verify utilities on ROM and has a powerful machine code operating system with up to 248 files.

To order your drive and take advantage of our special DDOS offer, call Opus now on **0737 765080** or simply post the coupon below.

To: Opus Supplies Limited, 53 Ormside Way, Holmesthorpe Industrial Estate, Redhill, Surrey
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)

_____ 1 Megabyte (unformatted) System(s) at £109.95 each

_____ 2 Megabyte (unformatted) System(s) at £209.95 each

_____ Opus Double Density Disc Interface at £40.00 each
(Only when purchased with drive)

I enclose cheque for £ _____ or please debit
my credit card account with the amount of £ _____

My Access ☐ Visa ☐ no is:

NAME

ADDRESS

TELEPHONE

Opus.

MUS

Watford Electronics

Jessa House, 250 Lower High Street, Watford WD1 2AN, England

Tel: Watford (0923) 37774 Tlx: 8956095 Fax: 01 950 8989

Shop Hours: 9am to 6pm (Mon.-Sat.) Thursdays 9am to 8pm

All prices exclusive of VAT; subject to change without notice & available on request.

Credit Card Orders (ACCESS & VISA) Tel (0923) 33383 or 50234 (24 Hours)



The choice
of Experience



The choice
before and after
the experience

Archimedes *micro*

The Acorn Archimedes range of microcomputer comprises four machines – the 305 and 310 with 0.5 and 1 MB of RAM, and the 410 and 440, with 1 and 4 MB. All have 0.5 MB of ROM and one 3.5" floppy disc drive of 800K as standard. The 440 also has a Winchester drive of 20MB – all mounted internally.

They have separate keyboard and a three button mouse as standard. The Keyboard is compatible with the new IBM ATE layout, with 12 function keys.

The standard display is a high resolution mono colour monitor. A colour, multifrequency monitor is optional.

The screen modes include:

- 80 × 25 or 32 characters, in 2, 4 or 16 colours for wordprocessing, etc.

- 132 × 25 or 32 characters, for spreadsheets, etc.

- Up to 640 × 256 dots × 256 colours (with single frequency monitor) and up to 640 × 512 dots × 16 colours (with a multi frequency monitor), for graphics, etc.

The sound system can have up to eight channels playing at once, from up to 32 instruments or voices, using waveform synthesis and stereo output.

The outlets for the monitor, printer, serial port and audio are all at the rear, and have industry standard connectors.

The 410 and 440 have a backplane for four expansion modules and the circuitry for a Winchester disc drive as standard.

The complete operating system – including Window Manager and Desktop – is in 0.5 MB of ROM. It can access directly all the RAM that can be fitted (upto 4 MB).

The Advanced Disc Filing System uses robust, pocket-sized 3.5" discs with a new 800K format, but also reads, writes and formats the 640K discs used by the Master series. As well as 25% more capacity, the new format allows almost four times the data transfer rate.

A battery-backed clock-calendar, and CMOS RAM to hold configuration setting is standard.

Expansion is via internal plug-in boards (modules), which connect with the backplane.

ARCHIMEDES PRICES

305 Series

- Entry System £699
- with Green Monitor £749
- with Colour Monitor £899

310 Series

- Entry System £775
- with Green Monitor £825
- with Colour Monitor £975

310M Series

- Entry System £835
- with Green Monitor £885
- with Colour Monitor £1035

410 Series

- Entry System £1339
- with Green Monitor £1449
- with Colour Monitor £1599

440 Series

- Entry System £2299
- with Green Monitor £2349
- with Colour Monitor £2499

(Securicor carr. £7 on Micros)

- 0.5 Mb RAM for 305 £85
- Podule Backplane £37
- ROM Podule (Computer Concepts) £49
- Archimedes Ref Manual £29
- ARM Assem. Lang Prog Manual £12

Modules expected this year (from Acorn unless stated) include:

- 2nd 800K floppy disc drive (for 305, 310 & 410) £125
- Econet Network Board £43

A Computer for BUSINESS, RESEARCH, EDUCATION & HOME USE

- Backplane for 2 modules, with fan (305, 310) £39
- I/O Podule (with User port, Analogue port & 1MHz bus) £79
- MIDI add-on to I/O Podule £29
- ROM Podule (takes five 8 bit ROMs, of 16, 32, 64 or 128K) £59
- Modem Podule (Beebug) TBA
- Real time Video Digitiser (Watford) TBA
- Sound Sampler (Armadillo) £78
- Speech Podule (Tubelink) TBA

Due in the 2nd quarter 1988

PC Podule, with 10 MHz 80186, 640K and floppy disc interface, (for all models). This should run about 3.5 times as fast as an IBM-PC. Fully IBM compatible.

SPECIAL OFFER

With every Archimedes Micro purchased from us, we are giving away absolutely **FREE** a 5¼", double sided disc drive with PSU, (1 Megabyte unformatted), plus the special Archimedes interface cable, worth £125. (P.S. This offer does not apply with 0% finance scheme mentioned below).

0% (APR) FINANCE

For a limited period, Watford Electronics are able to offer the Archimedes range of microcomputers at 0% (APR) finance. Credit facility available for up to 12 months, subject to status. Please inquire for further details. (Watford Electronics are Licenced Credit Brokers)

NEW

CREDIT TERMS now available. Please telephone or write in for further information.

What Archimedes can do

The software on the welcome disc includes four applications.

"PAINT" is a simple mouse driven art package, operating in the 640 × 250 × 16 colour screen mode. Images can be produced without any programming and saved to disc for use elsewhere.

The Sprite Editor allows sprites to be created pixel by pixel in the 640 × 256 × 16 and 256 colour screen modes. It can also be used to edit pictures from "Paint". The results can be used in Basic programs for animated graphics. The Font Designer "allows you to design individual letters and symbols – and save them together as a font". They may be "anti-aliased", for even better appearance on screen.

The Music Editor allows you to enter music in standard notation, with up to four "parts", and save it to disc. It may be played via the internal speaker (in mono) or via external headphones or hi-fi (in stereo). The voices or instruments (of which there are nine as standard), and their volume, tempo and stereo position may all be varied while playing.

BBC Basic 5

This is upwards compatible with earlier versions, so most programs written in them will run – though far faster. Even using a 305, up to 370K is available in Basic. It also affords access to all the new graphics, windowing and sound facilities – as shown by the applications on the

Welcome Disc. As well as being in the system ROM, BBC Basic 5 is provided on disc for loading into RAM because it then runs about 40% faster. This speed makes it the FASTEST MICRO IN THE WORLD". BBC Basic 5 includes an in-line Assembler.

WORDPROCESSORS

- | | | | |
|---------------|-----|-----------|-----|
| Wordwise + | £20 | View | £50 |
| Image-Writer | £26 | Viewspell | £32 |
| Interword ROM | £39 | ViewIndex | £13 |

DATABASES

- | | |
|---------------------|-----|
| System's Delta Plus | £60 |
| AlphaBase | £43 |
| Viewstore | £52 |

SPREADSHEETS

- | | | | |
|----------------|-----|------------|-----|
| Intersheet ROM | £39 | Viewsheets | £50 |
|----------------|-----|------------|-----|

BUSINESS GRAPHICS

- | | |
|----------------|-----|
| Interchart ROM | £25 |
| GammaPlot | £30 |

INTEGRATED PACKAGES

- | | |
|-----------------------------------------------------------------------|-----|
| Logistix – Database, Spreadsheet, Time Management & Business Graphics | £95 |
|-----------------------------------------------------------------------|-----|

ACCOUNTS PACKAGES

- | | |
|--------------------------------------|--------|
| Meadow Computers' suite of 4 Modules | P.O.A. |
| Minerva's suite of 5 Modules | P.O.A. |

GRAPHICS, ART & DESIGN

- | | | | |
|------------|-----|------------|-----|
| Interchart | £25 | Gamma Plot | £30 |
| Artisan | £34 | Gamma Plus | £60 |

GAMES

- | | |
|------------------|-----|
| Zarch | £17 |
| Toolkit (Beebug) | £33 |

EDUCATION

A great many packages are expected in early 1988. The topics include: Business Studies, Maths, General Science, Biology, Physics, Chemistry, Economics, Geography, History & Music.

PC EMULATION

The Acorn PC Emulator (for 310, 410 & 440), includes MS-DOS 3.21 and is available NOW at £89. It runs most MSDOS and many PC-DOS applications (which number over 10,000). Compared with IBM PC, this all-software emulator can calculate about half as fast, and write to the screen about a quarter as fast. This makes it more suitable for running spreadsheets (such as Lotus 1-2-3) than wordprocessors (such as Wordstar). However it includes utilities for copying disc files between DOS and ADFS formats, so that data may be transferred to and from Archimedes applications. The 3.5" discs used by the new IBM PS/2 models, and by many DOS portables, may be read, written and formatted directly. 5.25" discs require an additional, external drive, which is available as an option. The PC Podule (due second quarter '88), will run very much faster.

£99

LANGUAGES

Acornsoft ANSI "C", ISO-Pascal, Fortran 77, Cambridge LISP and PROLOG X are all available now at £95 each, as is the Twin Editor, at £29. These require at least a 310. The ANSI "C" affords access to all the graphics, windowing and sound facilities of the Archimedes and executes at exceptional speed – 14 to 26 times that of a PC, 5 to 10 times that of an AT, and as fast as most 386 machines. (For demonstration, call in at our retail shop.

If you require technical literature, then simply telephone us).

Archimedes to BBC SERIAL LINK

Using this simple data link, it is possible to solve all your BBC to Archimedes data transfer problems. The kit is supplied with two disks, one 5.25" for the BBC, the other 3.5" format for the Archimedes, and the necessary cable to connect the two computers. Using this package it is possible to transfer any data from the BBC to Archimedes at up to 19200 baud. By far the easiest way to transfer data to your new computer.

Only £25

Archimedes 5¼"/3½" Disc drive Interface

With this interface it is possible to connect almost any 5¼"/3½" disc drive with its own power supply to the Archimedes. Up to FOUR drives can be connected and NO SOLDERING is involved. Supplied complete with necessary lead.

Only £25

Note: This is not simply a lead. Attempting to connect an external disc drive by direct connection may result in damage to your Archimedes.

Archimedes Printer Lead	£8.50
Archimedes Monitor Lead	£7.50

BBC MASTER

BBC MASTER 128K Micro incl.
Acorn's: View, Viewsheets, ADFS,
BASIC Editor & TERMINAL **£379**

SPECIAL OFFER

FREE ... £105 worth of Hardware & Software

Gemini's OFFICE MATE & OFFICE MASTER packages on Disc consisting of: Database, Spreadsheet, Beebplot graphics, Accounts packs: Cashbook, Final Accounts, Mailist, Easyleader, Invoice & Statements, Stock Control and Watford's 3½", double sided 1 Megabyte (unformatted) single disc drive complete with cables, ready to connect to the micro - with every BBC Master purchased from us this month.

BBC MASTER with Turbo Board + above SPECIAL OFFER	£475
512K Processor Add on Board "inc. Mouse and GEM package"	£185
BBC AIV (Domesday) System	£4479

ADD-ONS & ACCESSORIES

Turbo 65C102 Add-on Module	£95
Econet Module for the Master	£40
Twin ROM Cartridge for Master	£7.50
Quad ROM Cartridge for Master	£12
Universal Processor Adaptor	£75
Master Reference Manual I (No VAT)	£14
Master Reference Manual II (No VAT)	£14
Master Advance Ref. Manual (No VAT)	£19
64K Upgrade Kit for B+	£32
Acorn 1770 DFS Kit complete	£41
ECONET Upgrade Kit for BBC	£42
ALL ECONET UPGRADES Available	
ARIES' Professional IEEE Interface	£238
Acorn IEEE Interface Complete	£265
Morley Teletext Adaptor with ATS Rom	£99

BBC MASTER COMPACT

All Master Compact Microcomputers are supplied complete with an integral 3½" Disc Drive and various educational and professional bundled software.

System 1 Standard Package	£310
System 1A System 1 + TV Modulator	£322
System 2 System 1 + Green Hires Monitor	£364
System 3 System 1 + Medium Res Colour Monitor	£478
RS232 Kit for BBC Compact	£25
Additional 3½" Drive for BBC Compact (Securicor carriage £7)	£90

CO-PRO Adaptor



Now for the first time you can add the Master Co-processor boards, to your standard BBC model B, or B Plus. With this brand new launch from Watford Electronics you can attach any BBC Master co-processor to the original BBC Micro. Once again Watford strides ahead with a new concept in BBC B Micro add-ons. This unique external Co-Pro Adaptor, is protected by patent applications.

Use the super fast Turbo Board with your BBC B, it is much faster than the 6502 2nd processor superseding it.

With the 512K add-on your standard BBC machine achieves IBM PC compatibility at a realistic price running GEM, Lotus 123 and many other programs. Included with the 512k package is a high precision mouse and the Digital Research GEM suite of software; GEM Desktop, GEM Write GEM Paint. This requires both the 1770 DFS and the ADFS to be fitted to your computer.

To use other co-processors you require a BBC B with DNFS 1.20 or higher, or BBC B+ fitted with 1770 DFS 2.20 or greater. Co-processors work exactly like a second processor. Master owners may use Co-Pro to add a second Co-processor externally.

Watford, brings power to your BBC at only:

£35 (carr £5)



CREDIT CARD 24 HOUR
Ansaphone Hot Lines
(0923) 50234 or 33383

The 80186 Co-Processor

This package consists of the Master 512 board, Watford Co-Pro Adaptor, 1770 Disc Upgrade and Acorn ADFS. The Master 512 board using the 80186 16 bit Processor at 10MHz and running Digital Research DOS Plus, gives a high degree of IBM compatibility at an extremely reasonable price. Included in the 512k package is a mouse and the amazing Digital Research GEM suite of software; GEM Paint, GEM draw and GEM desktop giving a complete Mouse Icons environment (All other GEM packages will work on the 512k). Famous packages that will work with the 512k board include Wordstar, Dbase II, Lotus 123 and many others. The only requirement to upgrade any BBC Model B to this system is you must have twin 80 track disc drives.

£259

65C102 2nd PROCESSOR

This amazing package consists of the Acorn 65C102 'Turbo' Board, the Watford Co-Pro Adaptor and Acorn 1.2 DNFS ROM. The 'Turbo' board, running at 4MHz with 64k of additional RAM will increase the speed by between 50 and 200% depending on the application running, and allow a BASIC program of up to 44k in any screen mode. Simply by plugging in the Co-Pro and the DNFS ROM with its special Tube host code and you massively increase the power of any Model B.

£135

SPECIAL OFFER

EPROMs for BBC's Sideways ROMs.

2764-250ns £3.00

27128-250ns (12V5) £3.25

27128-250ns (21V) £4.25

RAMs (Low power) for ATPL, WATFORD, etc.,

Sideways ROM Boards

6264LP (8K) £2.50

2 x 6264LP (16K) £4.80

Z88 Sinclair's Portable Micro

Watford Electronics announce a very special new - and affordable portable microcomputer, tailor-made for the BBC Micro user on the move - the Cambridge Z88.

The Cambridge Z88 is a versatile portable micro, bursting at the seams with built-in software ready and waiting for you to use at the push of a button. There is BBC BASIC, a word processor, a database, a terminal, a file manager and a calculator, all integrated and all inclusive!

The Cambridge Z88 uses just four AA batteries, and from this it will store all of your programs and files on a built-in RAM disc, so there are no cassettes to worry about or discs to lose.

The LCD display is particularly impressive, using state of the art Supertwist technology, the display is sharp at all times, and clear under even the worst lighting conditions.

The word processor is based on Acorn's View package; View is the most popular word processor available for the BBC Micro, and files and programs written on the Z88 can be transferred to and from the BBC Micro with consummate ease.

The Pipedream word processor is possible the single most powerful package written for a portable yet! Being an integrated Spreadsheet and word processor you can combine text and numbers to create stunning reports, timetables or simply letters in a variety of column widths (up to 80 column) and numeric data can be freely sorted searched and calculated INSIDE a text file - a feature only previously available on much more expensive software packages running on large machines.

Nearly all of the 32K memory is available as the RAM Disk, although additional memory packs of 128K are also available, just plug them into the machine (no soldering - no screwing) and you have four times the memory you had before, all of which is available to the Word Processor.

Connecting the Z88 to the BBC Micro is easy; by plugging in the RS232 cable from the Z88 into the RS423 socket in the back of the BBC Micro, a data exchange as fast as 19200 baud is achieved, making the Z88 a fast machine for data transfer.

Custom software is available for the BBC Micro enabling automatic transfer of files to and from the Z88 with automatic conversion and full error checking. The connecting lead plugs straight into the back of the BBC Micro and into the side of the Z88 to form a reliable data link faster than some disc drives!

The Z88 is rugged, reliable, lightweight and compact. It is considerably lighter than all other portable computers currently available, and because it doesn't need disc drives, it is more reliable than any PC "laptop" portables making it especially useful to the BBC Micro owner away from work or home.

Here's what A&B Computing had to say about the Z88:

"The Z88 is an especially worthy machine to have on the move because the files it creates in Pipedream are directly compatible with View Professional... you can write a full report using all of the facilities of Pipedream, port it across using the BBC link software and load it into View Professional".

"The Z88 is surprisingly easy to connect to the outside world - it simply has oodles of RAM disc (up to three megabytes) which can be plugged into the machine".

Need we say more? The Cambridge Z88 - a very special computer. Our Managing Director liked it so much that he uses one constantly.

Price: **£249 (carr £3)**

FREE

As an introductory offer, we are giving away, 4 rechargeable batteries and a compact Mains Battery Charger absolutely FREE with every Z88 bought from us this month.

ACCESSORIES

Mains Adaptor	£8.65
32K RAM Pack or 32K EPROM Pack	£17.35
128K RAM Pack or 128K EPROM Pack	£43.40
Z88 BBC or PC Link	£21.70
Z88 EPROM ERASER	£34.75
Serial Printer Cable	£8.65
Parallel Printer Cable	£24.00
Z88 Modem	£86.90

Continued



We stock a range of monitors to suit all needs. Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop. All Monitors are supplied complete with BBC connecting leads FREE.

MICROVITEC 14"

- 1431 - Standard resolution as used on the BBC television computer programme £175
- 1451 - Medium resolution, suitable for word processing in mode 0 £225
- 1441 - High res, exceeds the capabilities of the BBC micro £359
- 1431AP RGB + PAL and AUDIO £199
- 1451AP RGB + PAL and AUDIO £255
- 2030 CS 20" Med Res £380
- 2040 CS 20" Hi Res £675
- Dust Cover for Microvitecs £5.50
- Touchtec 501 Touch Screen £239

TAXAN 12/14"

- TAXAN Super Vision 2 Type 620 Hi-res RGB Colour monitor. Ideal for Wordprocessing £269
- TAXAN Super 3, Type 625 Ultra Hi-res, RGB Colour Text mode switch allows monochrome text display in Green, Amber, White reverse or White on Blue £319
- TAXAN 14" Multisync 770 Plus - An autoscanning Ultra high res, colour monitor. Ideal for Archimedes £449
- Philips BM7542 12" Paper White Monitor. Attractively finished high res monitor. Has an etched glass anti-glare screen and a tilt stand for optimum viewing angle. 1000 x 850 pixels resolution coupled with high contrast makes it ideal for both word pro and graphics. The paper white display is ideal for DTP and CAD. Has a Video/Audio input. Only £65

STAR BUY

- PHILLIPS 14" Hi-Res, dark glass, attractively finished Colour Monitor - supplied complete with RGB, SKART and Audio/Phono inputs. A push-button switch toggles between Hi-Res monochrome green text mode and full colour display.

ONLY £195

ZENITH

"Now Test Bureau Recommended for use in Education"

12" high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. (These are the same professional quality, stylishly finished monitors as used in the larger Zenith PC Sys.) Green (New Design) Hi-resolution £66
Amber (New Design) Hi-resolution £70

N.B. carriage on Monitors £7 (securicor)

SPARE LEADS

BNC Lead for Zenith or Philips £3
Skart Monitor Lead £5
RGB lead for TAXAN Monitors £3

SWIVEL BASES

for Video Monitors


Our professional type swivel bases have front adjustable control. This alleviates the need to lift the monitor when adjusting the viewing angle.

for 12" Monitors £10 (carr. £2.50)
for 14" Monitors £14 (carr. £2.50)

Anti-Glare VDU Screen

These extremely effective, easy to install, 12" & 14" VDU screens eliminate harmful glare, improves contrast on colour monitors. Increases productivity in offices. A must for all wordprocessor users. Hundreds of these screens are in daily use in various branches of one of the leading High Street banks. £12

Panasonic KX-P1081



Available NOW at a superbly realistic price, the KX-P1081 perfectly balances features, quality of construction and Value for Money to produce the printer of tomorrow, here today, ready to sweep the current generation of machines away.

Ingenuous innovation in terms of software control codes permits great flexibility when it comes to defining the print style. A nippy 120 cps of clear Draft text backs up the crisp 24 cps Near Letter Quality text mode, with upto 40 superbly useful downloadable characters. A delightful range of assorted character widths is efficiently supported, with sizes ranging from a broad 5 cpi to petite 17 cpi, EVEN in NLQ mode. Some of the extensive support for serious use includes specialised functions to perform justification, centering and even left and right ranging. Proportional spacing permit even greater freedom when it comes to advanced use. Not only is the full Epson RX compatible control code set implemented, but extra codes have also been added to cater for the NLQ options, etc.

A full 96 ASCII character set is supported, with an extended set of 32 international characters and IBM special characters as well as IBM block graphics characters. A 1K Print Buffer alleviates much of the wait time normally associated with printing, whilst the bi-directional logic seeking print head takes the quickest route to print as required.

(Price includes, FREE a 4ft Printer Lead, and a Dump Out 3, Screen Dump ROM worth £35 with every printer purchased from us).

Special Price: **£149** (carr. £6)

Optional RS232 Interface: £39

Panasonic KX-P1082

To complement the hugely popular KX-P1081, WE are proud to announce the launch of Panasonic KX-P1082. This superb Letter Quality printer incorporates all the features of the KX-P1081, plus a draft speed of 160 CPS, (40 CPS in NLQ mode). Ideal for high through-put users. This is a similar speed to the Epson LX800, but has an in-built adjustable tractor feed as standard and the price is way below the price of its nearest rival.

(Our LOW price also includes £35 worth of FREE BBC Cable and Dump Out 3 ROM).

Introductory Offer: **£175** (carr. £7)

Panasonic KX-P3131 Daisy-Wheel Printer

This low-cost high-performance Daisy Wheel printer is ideal for anyone wishing to produce clear, immaculate letters or reports. It delivers, flawless text at 10, 12 & 15 CPS. Supports proportional spacing. Is Bi-directional, logic seeking. Printing speed: 17CPS. Has 6k printer Buffer. A printer of similar spec could cost a lot more than our ridiculously low price of:

Only **£239** (carr. £7)

Single Sheet Feeder £175
Tractor Feed £90

FREE 32K extra Printer Buffer with every KX-P3131 purchased from us this month.

VARIOUS PRINTERS & ACCESSORIES

- Brother HR15 RS232 Daisy Wheel £275
 - Brother HR20 Daisy Wheel £349
 - Epson EX800 Printer £399
 - Epson EX1000 Printer £545
 - Epson FX800 Printer £295
 - Epson FX1000 Printer £405
 - Epson LQ800 Printer £358
 - Epson LQ1000 Printer £529
 - Epson LQ2500 Printer £790
 - Epson LX800 Printer £180
 - Epson SQ2500 Printer £899
 - Epson Paper Roll Holder £17
 - EX800/1000 Colour Option £55
 - EX800/1000 Colour Ribbon £18
 - EX800 Cut Sheet Feeder £130
 - EX1000 Cut Sheet Feeder £195
 - FX/LQ/LX800 Single Sheet Feeder £135
 - FX/LQ1000 Single Sheet Feeder £169
 - Hi-80 Refills - Set of 4 Pens £7
 - LX800 Cut Sheet Feeder £75
 - LQ800 Tractor Feed £44
 - LQ1000 Tractor Feed £50
 - LQ2500 Cut Sheet Feeder £195
 - LX1000 Cut Sheet Feeder £305
 - Hitachi 672 Colour Plotter £475
- (Securicor Carriage on Printers £7)

EPSON PRINTER INTERFACES

All these interfaces fit inside the printer.

RS232	£27	RS232 + 2K Buffer	£52
IEEE 488	£65	RS232 + 8K Buffer	£62

KAGA/TAXAN PRINTERS

(IBM/Epson compatibles)

Kaga KP815 Printer	£269 (carr £7)
Kaga KP915 Printer	£350 (carr £7)
RS232 Interface	£49
RS232 Interface with 2K Buffer	£69
RS232 Interface with 16K Buffer	£89

INTEGREX COLOUR JET PRINTER

- Colour Jet 132 Printer £525
- Paper Roll £6
- Screen Dump Software £10
- Colour Cartridge £14
- Black Cartridge £8
- 100 A4 OHP transparencies £55

PRINTER SHARERS


(Ideal for School environment)

Connects	Serial	Centronics
2 BBC Micros to 1 Printer	£25	£27
3 BBC Micros to 1 Printer	£36	£35
6 BBC Micros to 1 Printer	-	£99

PRINTER CHANGER

3 Printers to 1 Micro (Centronics) £65
(Cables extra, specify type required when ordering)

Professional Printer Stand



This new professional printer stand takes hardly more space than your printer. Due to the positioning of the paper feed

and re-fold compartments ie. one above the other, the desk space required for your printer functions is effectively halved. Additional facilities include: Easy access to paper from both sides, used with both top and bottom feed paper and with its dial controlled paper feed system with adjustable deflector plates it ensures smooth paper flow and automatic refolding.

£26 (carr. £2.50)

THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities – he may even have offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled 'THE EPSON RX-FX-KAGA PRINTER COMMANDS REVEALED'.

This book describes in plain, easy to understand English, how to use and make the most of your KP810, PW1080A or any other Epson FX80 compatible Printers like Panasonic KX-P1080/1, etc., with the BBC Micro, both from BASIC and Wordwise.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from Wordwise.

£5.95 (No VAT)

PRINTER LEADS

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA, Panasonic etc. printers.

Standard length (4 feet long)	£6
Extra long (6 feet long)	£8
Compact's Special Centronics Lead	£9
RS232 Cable	P.O.A.
IBM Parallel 1 metre Cable	£9

PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	Dust Covers
BBC Micro	—	£3.50
BBC Master	—	£4.00
Brother HR15/20	£3.00	£5.00
EX/LQ800	£7.50	£4.50
EX/LQ1000	£8.00	£5.00
RX/FX80/85/800/MX80	£4.00	£4.95
RX/FX100/1000	£7.00	—
Kaga/Texasan KP810/815	£5.25	£4.00
LQ2500	£9.00	£5.50
LX80/86/800	£4.00	£4.50
M1009/GLP	£4.00	£3.75
Panasonic KX1080/81	£4.50	£4.75
SQ2500	£25.00	£5.50
Star NL10	£4.00	£4.50
Microvitec Metal	—	£5.50

Our attractive Dust Covers are manufactured from translucent PVC. The seams are stitched and edges are taped to prevent splitting due to continuous use.

Listing Paper (Perforated)

1,000 Sheets 9½" × 11" Fanfold Paper	£7
2,000 Sheets 9½" × 11" Fanfold Paper	£12
1,000 Sheets 15" × 11" Fanfold Paper	£9
1000 Sheets true A4 Fanfold Paper	£11
2000 Sheets true A4 Fanfold Paper	£20
Teleprinter Roll (Econo paper)	£4

(All our Fanfold paper is Micro perforated leaving a smooth clean edge when the tractor feed strips are detached).

Carriage 1K Sheets £2.50. 2K Sheets £3.00

PRINTER LABELS

(On continuous fanfold backing sheet)

1,000 90 × 36mm (Single Row)	£5.00
1,000 90 × 36mm (Twin Row)	£4.90
1,000 90 × 49mm (Twin Row)	£7.50
1,000 102 × 36mm (Twin Row)	£6.25
Carriage on 1,000 Labels	£1.00

MEGABUFFER 256



This new Megabuffer 256 from Watford is a full featured 256K Printer Buffer. It allows the computer to print 256,000 character in a short time thus freeing the computer very quickly. In short it makes light work of printing large documents, screen dumps, etc. It is extremely simple to connect. The features are:

- Low Cost, High performance.
- Improves efficiency by making more efficient use of computer and printer.
- Compatible with any computer and printer that uses Centronics Parallel connections including all BBCs, IBM PCs, etc.
- Total compatibility with all software.
- Cheaper phone bills when using your Modems.
- Ideal for those doing large graphics screen dumps that are slow to print.
- Multi-Copy facility allows you to print several copies via Megabuffer without going through your computer.
- Data Dump facility is included.
- Built in test unit for both the buffer & your printer.

In conclusion it can safely be said that MEGABUFFER 256 is the ultimate printer Buffer for both the amateur and professional user.

Only £125 (carr £2)

OFFICE MASTER



CASHBOOK – A complete "Stand Alone" accounting software package for the cash based sole trader/partnership business. It is designed to replace your existing cashbook system and will provide you with a computerised system complete to trail balance.

FINAL ACCOUNTS – Will take data prepared by the Cashbook module and produce a complete set of accounts as following: Trial Balance with inbuilt rounding routine; Notes to the accounts; VAT Summary; Profit & Loss A/C; Balance Sheet.

MAILIST – A very versatile program. Enables you to keep records of names and addresses and then print, examine, sort and find them, all with special selection techniques.

EASILEDDER – A management aid software tool designed to run alongside an existing accounting system. Essentially a Debit/Credit ledger system which can handle sales, purchase and nominal ledger routines to provide instant management information.

INVOICES & STATEMENTS – Greatly reduces the time and cost of preparing Invoices and Statements by storing essential information like customer names, addresses and account numbers. Has VAT routines and footer messages facility.

STOCK CONTROL – Allows you to enter stock received, stock out, summary of stock items and current holdings together with details of total cost, total stock to minimum level, units in stock ordering, quantity and supplier detail.

All this for only £21 (Disc)

OFFICE MATE



- DATABASE
- BEEBCALC SPREADSHEET
- BEEBLOT GRAPHICS


DATABASE – Set up a computerised card index system with powerful search facilities.

SPREADSHEET – Offers many calculation and editing features.

BEEBLOT – Provides visual representation from Spreadsheet data.

OFFICE MATE Only £10 (Disc)

New Launch Offers Disc Drives DP35-800S



A Double disc drive – with a difference! Times are changing fast for the floppy disk, and whilst the current standard for the BBC B and Master Series is the 5.25 inch disk, the standard for the future will most certainly be the smaller; faster and more reliable 3.5 inch disks – now a standard feature of both the Master Compact and the Archimedes Series.

To support the present disc drive users, and cope with the future, we have designed our own plinth-mounted disk system – called the DP35 800S, it contains both the 5.25 inch and the 3.5 inch drive formats as well as offer a firm and rigid support for a monitor on top. With the BBC Micro underneath, the plinth makes a surprisingly small footprint on the desk – leaving you more space to work with.

The 5.25 inch disk drive is 40/80 track switchable, and has its very own power supply running independently of the BBC Micro.

Watford's new plinth enables users to read, write and format disks both in DFS and ADFS format – currently the accepted standard for the Master Compact and the Archimedes, it also enables the user to read disks written for the Archimedes. Ideal for both BBC & Master.

Launch Offer: £165 (carr. £7)

CSPM 400/S DISC DRIVE

A single (1 Megabyte unformatted), double sided, 40/80 track switchable 5¼" disc drive mounted in a BBC Master Plinth (same as DP35-800S) but with a blanking plate to add a second disc drive at a later date. The in-built Power Supply is capable of running two disc drives. The unit is supplied complete with cables and a utilities disc.

Launch Offer: £139 (carr. £7)

30 Megabyte Winchester Drive



Undoubtedly the best value for money Winchester Hard disc available anywhere for the BBC Micro.

This 30 Megabyte hard disc is completely compatible with the Acorn ADFS – that's why we have bundled it with each Winchester drive, along with a full user guide and full utilities including file copy, 1000K save routines, Format and Verify – in fact all you need and more.

Finished in rugged metal and fetching BBC beige, the Winchester has an internal fan, so quiet you won't even hear it! A switched mode power supply and a neon-lit on/off switch are there along with a light on the hard disc to tell you when it is working – just compare the price with our competitors' 20 or 28 Mbyte discs!


Compatible with the Master, and the BBC B (with 17" X disc interface).

Launch Offer £449 (Carr. £12)

At last, it's here!
The Advance Reference Manual
for the BBC Master
£19.95

NEW

DISC DRIVE SHARER

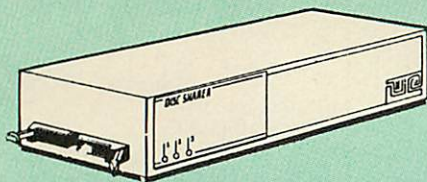

(Ideal for educational establishments)

At last, a low cost alternative to the Econet system. Watford's Intelligent Disc Drive Sharer allows you to connect 3 BBC micros (model B, B+ and Master series) to a single or double disc drive. Running under any DFS or DDfs, this intelligent unit will automatically queue the computers. Each computer has a status light dedicated to it. If it is green you will get immediate access to the disk, and red means that you are next in line. The unit plugs directly into the disc drive socket on each computer and is powered by the mains. (N.B. Not compatible with ADFS.)

Launch Price: **£59**

Price includes 3 Cables

NOW WITH EXTRA FEATURES AT NO EXTRA COST – Watford's latest DFS 1.44

- Incorporates Acorn's Official Tube Host Code so that those with 2nd processors no longer need to waste a ROM socket on the DNFS.
- Option to DOUBLE the speed of BPUT and BGET.

If you already have the Watford Electronics DFS and wish to incorporate these new facilities then simply return your existing DFS ROM to us together with £5 remittance for an upgrade. Please pack the ROM securely and address the package to our Upgrades Dept.

WATFORD's & ACORN's SINGLE DENSITY DFS

Watford's popular and widely acclaimed DFS has now been available for five years and has gained a large following amongst serious and educational users of the BBC Micro. Owners of Acorn or any other standard DFS can upgrade to our "Ultimate" DFS merely by replacing their DFS ROM. See below for this upgrade. (P.S. Watford's highly sophisticated DFS is fully compatible with Acorn DFS). (not Acorn's 1770 DFS)

- Complete Disc Interface Kit including DFS ROM and fitting instructions **£48**
- Acorn's 0.90 DFS Kit complete **£47**
- DFS Manual (Comprehensive) (no VAT) **£6.95**
(P.S. Our comprehensive DFS Manual covers both Acorn & Watford DFSs).
- Watford's sophisticated DFS ROM only **£16**
- We will exchange your existing DFS ROM for Watford's Ultimate DFS ROM for only **£12**
- DNFS ROM only **£17** ● ADFS ROM only **£25**
- Watford's DFS is exclusively available from Watford Electronics and their appointed dealers only. Every ROM carries a special label with LOGO and serial number.

NEW WATFORD's Mk II Double Density DFS INTERFACE

Many of our customers have wanted to use our superior DDfs and Acorn ADFS together. Now our MkII DDfs board has been adapted to allow the use of Acorn ADFS.

Added features include:

- Acorn ADFS compatible – Use ADFS on our DDfs board.
- Tube host Code – No longer any need to have the DNFS in your machine to use Co-Processors, even the CoPro and Master 512.
- Auto 40-80 Track sensing – no need to fuss with 40/80 track switches (even works with protected disks).
- An extremely powerful 8271 emulation – ensuring compatibility with almost all software.
- New low profile – small footprint board.
- Fits with all third party ROM boards.
- Option to double the speed of file handling operations – BPUT and BGET.
- Operates in both single and double density modes.
- OSGBPB has been recoded, increasing still further the speed of file handling.

Please note that not all DDfs's are capable of providing either the full 80% storage increase or of allowing a file the full size of the disk – Ours allows both of these!

If you already have a DDfs (any manufacturer), and wish to upgrade to our MkII version, then simply return your existing ROM and DDfs board and we will supply the new DDfs for only **£30.00**.

- Special introductory offer **£39.00**
- DDfs Manual (No VAT) **£6.95**
- We will exchange your existing DFS Kit for our sophisticated DDfs for only **£25.00**

Please note, as the MkII DDfs is a hardware and software upgrade, it is not possible for existing Watford DDfs users to simply exchange their ROM for the new version.

SPECIAL DISC DRIVE/DDFS OFFER


Type CLS400



- The popular Mitsubishi 400k Single Disc Drive, Double Sided, cased with Cables. Plugs directly to your Micro.
- Watford's popular DDfs Disc Interface (allows 720k storage). Will run in both Single and Double Density modes 40/80 track Software switchable.
- A comprehensive User Friendly Manual.

A Bargain at Only **£130** (£6 carr)
(Offer valid while stocks last)

3 1/2" DISC DRIVE OFFER



These top quality 3 1/2" Double sided, 80 track, 1 Megabyte (unformatted each Disc Drive), are attractively finished in BBC beige. They are supplied complete with all cables and a Utilities Disc. They run directly from the BBC B/Master's own PSU.

- Single 400K Drive **£69**
- Twin 800K Drives **£126**

Mysteries of disc Drives & DFS Revealed

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and use of these systems.

Then The Mysteries of Disc Drives and DFS Revealed is the book for you. It explains in detail the different types of systems available, how they are installed and how to use them. Many examples are given including pre-written programs to call various functions of the DFS available only through Operating System calls. Different types of disc, 40/80 tracks etc. are all explained. This book is ideal for the beginner confused by the plethora of choice available in the marketplace.

£5.95 (Book No VAT)

DISC ALBUMS

Attractively finished in antique brown leather look vinyl. Stores up to 20 Discs. Each disc can be seen through the clear view pocket.

£4

FLOPPY HEAD CLEANER KIT

The heads in floppy drives are precision made and very sensitive to dirt. The use of a cleaner Kit is a sensible precaution against losing valuable data. It is recommended to clean the drive head once a week. It is very simple to use. Available in 3 1/2" & 5 1/4", please specify.



£7

ANTISTATIC LOCKABLE DISC STORAGE UNITS

Gives double protection – Strong plastic case that affords real protection to your discs. Antistatic helps avoid data corruption whilst in storage. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs.

- M35 – holds up to 50 5 1/4" discs **£6.00**
- M85 – holds up to 95 5 1/4" discs **£8.00**
- M25* – holds up to 25 3 1/2" Discs **£5.50**
- M50 – holds 50 3 1/2" Discs **£7.50**

* Not lockable



PLASTIC LIBRARY CASES

Holds up to 10 5 1/4" Discs. **Only £2.00**

DISC PLONKER RACK

When using ones micro, there is a tendency to have more than one Disc on the desk. This exposes them to the hazards of fingerprints, scratches, dust, coffee and an untidy desk. Why not protect your valuable data from all these hazards with the help of our extremely handy and low cost DISC PLONKER RACK. It holds up to eight 5 1/4" Discs.

Protection at Only: **£2**



DUST COVERS (For our Disc Drives)

- Single CLS (without PSU) **£3.20** Twin CLD (without PSU) **£3.85**
- Single CS (with PSU) **£3.95** Twin CD (with PSU) **£3.90**

Quality Disc Drives from Watford

To help you decide which drive is the most suitable for your needs (and your pocket!), we have produced the table below.

The first capacity given in the first column indicates capacity in single density mode. That within the brackets is the capacity in double density mode. All disc drive type numbers start with the prefix "C".

The tinting on some of the boxes is used to indicate which Drives are 40 track (non-tinted) and which are 80 track (tinted). All our 80 track drives are already fitted with a 40-80 select switch.


All our Disc Drives are **Double Sided and will operate in both Single and Double Density modes**. Extensive experience of the usage of disc drives suggests that the JAPANESE drives currently represent about the best in terms of speed, reliability and overall "elegance" available for the BBC Micro.

Various other "manufacturers" of disc drives for the BBC micro (more accurately, "packages" label other manufacturers drives with their own name). We buy the high quality JVC and Mitsubishi drives in large quantities directly from the manufacturers, package them and sell them at "dealer" prices direct to the public.

If you look around the popular BBC micro press, you will find that the prices we quote for the top quality, new slimline disc drives are, virtually without exception, some of the best around. These prices, coupled with the backup of one of the country's largest distributors of BBC peripherals provides a superb deal.

Unless you anticipate using dual drives in a fully expanded BBC system for long periods of time with little ventilation, then we suggest that our range of "CL" disc drives without the PSU (Power Supply Unit) would be quite adequate (extensive tests within our workshops have confirmed this). All drives are supplied complete with a SPECIAL UTILITIES Disc, Cables and Plugs. The Drives with power supply have a mains moulded plug for safety purposes. Ideal for Schools & Colleges. We are now able to supply all single disc drives with Power Supply, in either single or dual case. (Dual case has a twin data cable and a power supply capable of driving two disc drives) allows easy expansion to a dual drive unit, at a later date. Prices stated in the pricing boxes below are for single drives in standard single cases. Single drives in a dual case cost an extra £5. (At Watford we anticipate your needs of tomorrow, not just today!)

When using a BBC Micro, most people find themselves short of desk space. The Watford's BBC Micro plinths form an ideal way of recovering some of this precious space) your BBC, Disc Drive and Monitor can all occupy the same vertical footprint and still be comfortably situated. With the Watford Double plinth, your Disc Drive is mounted vertically at one side, leaving a very valuable area directly in front of you for such useful items as spare discs, pen, paper, reference manuals, etc. Follow the trend with Watford plinth. (Turn to the 6th page of our advert for the Plinths). P.S. All our 5 1/4" Disc Drives with PSU are compatible with the Compact Micro. All you require is the special Compact Disc Drive Cables designed by us.

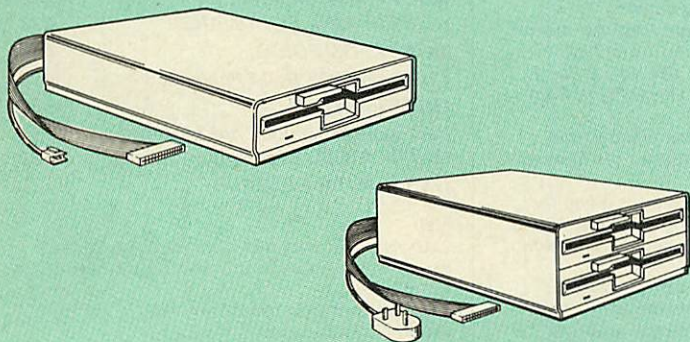

Capacity	Drives without P.S.U.		Drives with P.S.U.	
	Single	Twin	Single	Twin
200K (360K)	CLS 200 £89		CS 200 £98	
400K (720K)	CLS400S £89	CLD 400 £168	CS 400S £99	CD400 £188
800K (1.44M)		CLD 800S £169		CD 800S £188
● TWIN Disc Drive Case, complete with Power Supply & Cables £43 Securicor carriage on Disc Drives £5 to £6				

Prefix C = Cased Drive
L = Less PSU
S = Single
D = Double

Suffix S = 40-80 Switchable

e.g. CLS400S = Cased Disc Drive, Less power supply unit, single 5 1/4" 400K, (720K in double density); Double sided; 40/80 track switchable.

Cable to connect 5 1/4" Disc Drives to BBC Compact
Single £9 Twin £12
Special Cable to connect both 3 1/2" and 5 1/4" Disc
Drives
simultaneously to the BBC Compact £13

3M – DISKETTES

3M – SCOTCH Diskettes with Lifetime warranty from Watford Electronics your 3M Appointed Distributor.

● 10 × 5 1/4" S/S D/D 40 Track Diskettes	£8.25
● 10 × 5 1/4" D/S D/D 40 Track Diskettes	£10.20
● 10 × 5 1/4" S/S D/D 80 Track Diskettes	£12.75
● 10 × 5 1/4" D/S D/D 80 Track Diskettes	£13
● 10 × 5 1/4" 1.6M D/S D/D High Density Discs for IBM XT and AT	£28
● 10 × 3 1/2" S/S D/D 40/80 track Discs	£13.50
● 10 × 3 1/2" D/S D/D 40/80 track Discs	£19

TOP QUALITY 3 1/2" & 5 1/4" DISKETTES

To complement the range of quality discs and disc drives that WE already sell, WE are now supplying some special offer packs of 10 high quality discs. Each Disc has a reinforced hub ring and carries a lifetime guarantee. These are supplied complete with selfstick labels and packaged in an attractive plastic library disc box to protect them from damage. We strongly recommend these Discs.

DON'T SETTLE FOR LESS, BUY THE BEST

● 10 × M3 3 1/2" D/S D/D 80 Track Discs	£18
● 10 × M4 5 1/4" S/S D/D 40 Track Discs	£6.50
● 10 × M5 5 1/4" D/S D/D 40 Track Discs	£8
● 10 × M7 5 1/4" D/S D/D 80 Track Discs	£9
● 3" Double Sided Discs	£3 each

Special BULK OFFER on 5 1/4" DISCS

(Supplied packed in Anti-Static Lockable Storage Units)
(Lifetime warranty on Discs)

BULK PACK DISCS in lots of 100

Type	S-S 40T	D-S 40T	D-S 80T
● Without Sleeves	£35	£39	£45
● With Sleeves	£38	£42	£48

ACORN WINCHESTER DRIVES


FILESTORE E01	£825
FILESTORE E20	£705
Acorn 30MB Unit incl. Level III Software	£1520

WATFORD's WINCHESTER DRIVES

● 10 Megabyte Unit with ADFS	£399
● 30 Megabyte Unit with ADFS	£449
● 40 Megabyte Unit with ADFS	£749

CDP800S

CDPM800S



Twin 800K Double sided 40-80 track switchable disc drives mounted in an attractively finished Beige colour plinth for the BBC Micro. Supplied complete with integral power supply, cables and Utilities disc. The switches are mounted on the front panel for ease of use.

CDP 800S for BBC Micro £192
CDPM 800S for Master £196

(Securicor Carr. £7)

(The above drive units are 2 Megabytes unformatted)


ACORN'S Twin 800K Disc Drives

Specially mounted side by side in a Master Plinth. Supplied complete with Cables. Plugs directly to the Master Computer.

RRP £350

Our Price: Only £182
(carr £7)

Continued →

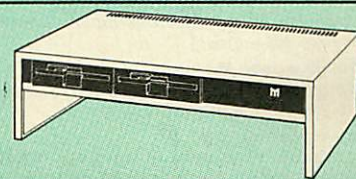



QUEST MOUSE

The ultimate in Mouse technology, the Watford Electronics Quest Mouse must be the most powerful Mouse package yet produced for the BBC Micro. Featuring state of the art 32K ROM software the Quest Mouse package is filled with features essential to the budding artist. The Quest Mouse is a high precision, low profile and large footprint mouse. It has three large comfortable buttons and is smooth and easy to use on most work surfaces. The Quest Mouse is FULLY HARDWARE COMPATIBLE with the AMX MOUSE so that it will work with any of the AMX range of software.

The two parts of the Quest package are available separately so that existing Mouse owners can upgrade to the Watford's sophisticated Quest Paint software or replace their existing worn out mice for a minimum cost.

QUEST PAINT

The Quest Mouse software is supplied on a PALPROM unit to allow the sophisticated 32K program to be used from a single ROM socket. It is compatible with the BBC B, BBC B Plus and BBC Master Series machines.

The software is used to draw high resolution Mode 1 pictures in full colour. All menu selection and control of the drawing process is performed with the mouse so that you will hardly ever touch the keyboard.

SOFTWARE FEATURES

The software is far too powerful for us to describe it fully in such a small space. Below is a list of the various features. Please write to us for a fully descriptive leaflet.

Disk interface not required. Utilities disk has facility to create and print big screens. Colours applied can be solid, either pattern of user defined pattern. Drawing can use brush or airbrush. Brush shapes can be defined and stored. Airbrush sprays colour/pattern randomly with four jet sizes and even or center spread. Colour cycles. Colour protection to stop particular colours from being overwritten by selected drawing actions. All standard drawing facilities like: rubber, straight pencil lines, triangles, circles, ellipses, rectangles, parallelograms, polygons, etc are provided. All shapes can be solid or just a boundary line. Once a shape has been set up it can be repeated anywhere on the screen. Global colour replace in a rectangle. Powerful fill facility for areas and vertical/horizontal lines. Full cut and paste of rectangular areas with rotation and size with screens from Watford Beeb Video digitiser. Load and Save screens with colour pallet information, save brush and pattern definitions etc.

Take The Guesswork Out of Selecting a Mouse Package

With reviews like this how can you go wrong.

Popular Computing Weekly, 9-11 June '87

"What you actually get for your money is a well built, three button mouse (far superior to the AMX mouse)."

"Overall the combination of a quality mouse and decent art package gives Watford Electronics a real chance of supplanting AMX as mouse supremos."

Micro User June '87

"Quest Mouse and Quest Paint can hold their heads high in the market..."

A&B Computing June '87

"... Watford Electronics, a company famed for excellent hardware add ons and versatile software packages. Called Quest mouse, "this is a very special mouse driven drawing package..."

"... you will have one of the most comfortable and professionally built mice I have used in a long time. The buttons are responsive, the mouse movement is smooth and without directional bias - a pleasure to use."

"What we have here is probably the best art package there is for the BBC Micro..."

"Quest Paint is a major leap forward in BBC programming..."

"Quest Paint is an original piece of programming, it is friendly and well endowed with many useful facilities. I would comfortably say it is easier to draw good pictures with Quest Paint than it is with more expensive 'Professional' art packages for the Atari ST and the Commodore Amiga. A recommended buy if you are looking for the best in BBC micro based art packages".

Acorn User, September '87

"The mouse (Quest) performs well in the face of competition from AMX, Wigmore and the rest..."

"... this package represents excellent value for money. If you are interested in art then this program is for you to buy".

"Given time, I can see no reason why Quest Paint shouldn't take on the title of the definitive art package available for the BBC Micro to date".

"All in all, Quest Paint is a very professional package. It contains virtually every feature the budding artist could require".

"What makes Quest Paint so versatile is the addition of a sub-menu which allows you extensive control over each function".

"Until recently, Superart from AMS had been judged as the definitive mode 1 graphics package for the BBC micro. But now it has a serious rival in the form of Quest Paint, from Watford".

"As a measure of what is contained within Quest Paint, I would say it had all the features of Superart plus..."

"In most art packages, provision is given for drawing triangles and rectangles. Quest Mouse goes 14 better, allowing any regular polygon of up to 16 sides".

"One facility, not found on any other Art package to my knowledge, is the ability to access a digitiser from within the program". The reviewer concludes by saying, "The result is an extremely comprehensive and professional art package".

John Kilby, Head of Computer Science, Bishop Wulstan High School, Rugby, writes:

"Quest has been an excellent piece of equipment. The problem that seems to occur everyday is that at lunchtime the pupils rush to the computer room to make sure that they are first in the queue for the 'Quest' mouse".

Lt. Cln. C.G. Holton, G2 HQ 1 (BR) Corps, BFPO 39, writes:

"As ever your service is superb and the Quest Mouse proves every bit as good as the adverts claim".

Beeblet User Group, New Zealand Oct '87:

"One of its nicer features is that the top menu is done in Mode 0, the drawing itself is in Mode 1. Thus on screen together are two different Modes. A neat way around an old problem".

"PAN is used when a larger than one screen size image is required. The mind boggles at an A3 size drawing".

"I like it partly because of the mouse itself which is smooth and easy to handle but mainly I suppose because of the features I longed for and previously never got. Its easy to use with almost everything at your fingertips from the mouse. The software is simple where needed and complex where complexity is required".

ConQuest

Watford's Quest package is an extremely powerful and flexible drawing package, with very wide and unusual features. However, since its launch various suggestions for even more advanced & powerful facilities were received from the Quest users. ConQuest allows you these more advanced facilities, like, distortion of a cutout to any shape and a full font designer. If you also have a GXR ROM in your machine or you are using a BBC Master then ConQuest will take advantage of this to give ellipses at any angle, sectors and arcs, etc. Quest combined with ConQuest and Acornsoft GXR ROM make up THE MOST POWERFUL drawing packages available for the BBC range. Quest Paint is able to take advantage of almost any additions to your machine, such as Shadow or Sideways RAM. ConQuest takes this principal even further, by utilising the otherwise normally incompatible Sideways RAM facility by holding pictures in them.

Some of the features are:

- Pick filenames off the screen for loading and saving.
- Rotate a cutout to any angle and Distort it to any four sided shape.
- Has Built in Font editor.
- Default brushes and patterns on startup.
- 16 x 16 font available on start up.
- Ability to reset patterns, fonts and brushes to default at any time.
- ROM based enhanced Epson and compatible printer dump.
- ROM based enhanced extended picture routine.
- Ability to create and abort extended pictures.
- Improved disk access speed for extended pictures.
- User definable sideways RAM driver for incompatible sideways RAM systems.
- Ellipses at any angle on Master 128 (or B with GXR ROM).

QUEST MOUSE & QUEST PAINT	£59
QUEST MOUSE, QUEST PAINT, AMX	
PAGEMAKER & PAGEFONT	£85
QUEST MOUSE ONLY	£29
QUEST PAINT SOFTWARE	£32
QUEST FONT DISC	£12
ConQuest 32K ROM Package	£29
QUEST MAT	£3
Part-exchange your old Mouse for a New QUEST MOUSE for only	£23
GXR ROM for BBC Micro	£22

N.B.

1. Quest Paint supplied complete with Software in a 32K ROM, Comprehensive User Guide and a Utility Disc.
2. Quest Font Disc has 22 text FONTS for use within Quest Mouse.

MARK II LIGHT PEN

Our Mark II Light Pen is the very latest in light pen technology. It is totally insensitive to local lighting conditions and works with many different monitors. The pen only responds to the High Frequency light produced by your monitor/TV. An LED indicates when valid video data is being produced. A conveniently located switch is also fitted.

Price Only £21

(Price includes FREE software Disc and Operating Manual)


RB2 Marconi Tracker Ball

RB2 (AMX/Quest compatible)	£59
RB2 including Quest Paint	£85

FLEET STREET EDITOR

Software pack for BBC Micro	£31
Software pack for the Master	£39
Software Pack for Compact	£40
Admin Xtra Disc Utility	£13
Walt Disney Disc Utility	£13
Fonts N Graphics Disc Utility	£13

DIAGNOSTICS DISC



The BBC Micro is a very complex machine and thus diagnosing a fault can be very difficult. At Watford Electronics, we realise how difficult it can be when faced with a problem, finding yourself a long way from your nearest dealer, or even just uncertain about your Beeb's health, but not wanting to waste time and money taking it to be looked at.


The solution to these problems is here now, in the form of the Watford's Diagnostics Disc. This excellent utility is specially designed to test out the following areas of your Beeb:

RAMs, ROMs, ULAs, Sound, Keyboard, Disc, RS423, ADC, User Port, Printer Port, Cassette, Joysticks, Speech, Disc Drives, 6502 and Z80 2nd Processors.

This utility is an invaluable aid for all those who take the reliability of their system seriously. A comprehensive manual provides full operating details and a list of possible causes and remedies for any faults that you may find along the way. The package also enables a permanent equipment and service record to be maintained.

Only £20.00

THE NEW Mk III AMX MOUSE



ONLY: £59 Inc. Super Art package
(carr £1.50)

(Please specify for BBC, Master or Compact)

FREE our popular Colour Art software pack worth £15 with every AMX Mouse package purchased from us.

AMX MAT	£3
AMX MOUSE ONLY	£29
AMX DESK Package	£19
AMX UTILITY Package	£11
AMX SUPERART Package	£39
AMX STOP PRESS – A Desktop publishing software. Works with Keyboard, Joystick or a mouse	£32

We are giving away absolutely FREE, our PAGE-FONT disc with every purchase of STOP PRESS from us.

PAGE-FONTS – Over 20 Fonts for use with AMX Pagemaker **£9.50**

AMX DESIGN (ROM)	£59
AMX 3D ZICON Disc	£19
AMX Database Disc	£19
AMX XAM Educational	£15
AMX EXTRA EXTRA	£19
AMX MAX A gem of desktop (ROM)	£15

TED

THE ULTIMATE TELETEXT SYSTEM

TED is one of a new generation of powerful 32K ROMs for the BBC B, B+ and Master computers and is compatible with disc, tape and network systems. It is in everyday use in schools, colleges and universities. Programmers, Prestel I.P.'s, Micronetters and exhibitors have also found it indispensable.

TED includes the most comprehensive teletext (Mode 7) screen editor ever written for the BBC micro, combining flexibility with ease of use. Its sophisticated facilities include line, column and block copying within AND between frames; text, in a variety of styles and sizes, entered directly from the keyboard; graphics and line drawing modes; search and replace; margins; printer dump routines and a library of in-built icons and typefaces. TED will edit ANY mode 7 screen and can even convert high-res graphics screens to mode 7! Included within the ROM is a fully Epson compatible mode 7 graphics dump routine giving a grey scale printout of exactly what appears on the screen.

Using *SHOW* (a versatile carousel), collections of mode 7 screens may be 'routed' or displayed sequentially, making it ideal for creating and running 'Viewdata' information systems. Over 1200 frames may be stored on a twin 80 track drive. A unique feature of TED is *SCROLL*, which lets you create pages of up to 600 lines which may be viewed 'Wordwise style', automatically or manually. SHOWs and SCROLLs may be freely mixed and even used from within a BASIC program.

The package comprises a 32K ROM, a 117 page manual, a function-key strip and a demonstration disc containing examples of real-time animation and a sample 55-frame database. A stand-alone machine code routine is provided allowing SHOWs and SCROLLs to be displayed on machines not fitted with TED.

Price: £35

ROM-SPELL




Probably the most advanced and fastest spelling checker available for the BBC Micro. Compatible with View, Wordwise and Wordwise Plus ROMSPELL is simple to use with easy editing of incorrect words. Full facilities for editing the user dictionary to allow customisation to your personal needs. Dictionary includes over 30,000 words and is supplied with a Comprehensive manual.

NOT compatible with 1770 DFS.
(Please state 40 or 80 track disc)

Price still only: £25

ROM MANAGER

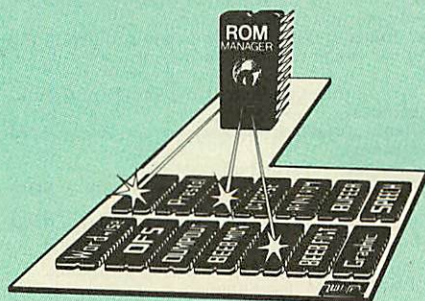


Take control of your Sideways ROMs with ROM Manager. This powerful utility ROM gives you power over your sideways ROMs. Disable whole ROMs, send commands directly to named ROMs and many other powerful facilities.

"Provides comprehensive management of all your installed ROMs". (BEEBUG November '84.)

ONLY £20


PLINTHS FOR BBC MICRO, MASTER & PRINTERS

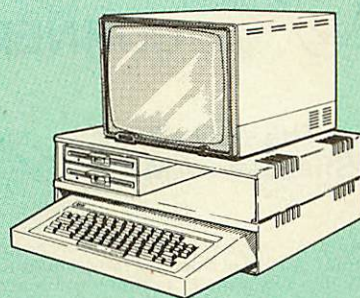

Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and paper separately.

SINGLE BBC PLINTH	£11 (carr. £1.50)
DOUBLE BBC PLINTH	£19 (carr. £3.00)
PRINTER PLINTH	£10 (carr. £1.50)
SINGLE MASTER PLINTH	£14 (carr. £1.50)
DOUBLE MASTER PLINTH	£24 (carr. £3.00)

COPY HOLDERS

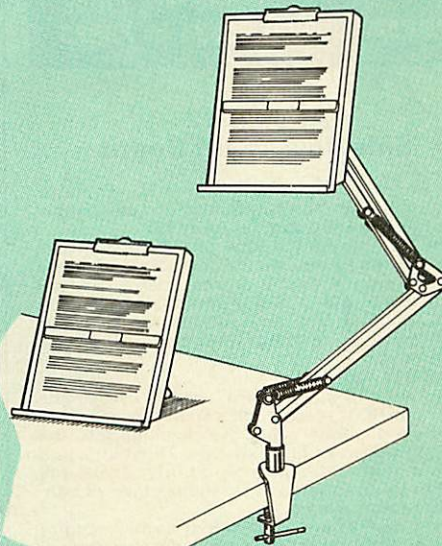

How often have you been about to type hand written notes into your computer when you find that there's nowhere to rest the paper or that your notes are resting at the wrong angle to read the type? Whether the notes be your latest program or the draft of a new trilogy, the new Manuscript Holders from Watford are superb for holding your paper at the ideal height and angle to allow you read and type in ease and comfort.

Available in 2 versions, desk resting and shelf clamping versions, these two units hold your paper firmly by means of a plastic retaining ruler and a clip grip. Both units are full A4 size.

Amazing value at only
Desk Top £10 (carr. £2)

Angle poise £14 (carr. £3)

Continued



ARIES CORNER

The Aries B-32 Shadow RAM Card

Like the BBC B+, the B32 provides 20k of shadow screen RAM and 12k of sideways RAM. Unlike the B+, the B32 has simple software commands which allow the user to reconfigure the RAM as 16k of shadow RAM and 16k of sideways RAM, or all 32k as sideways RAM.

With the B32, the programmer gets up to 28k of RAM available for Basic, Logo, Comal, Forth, Lisp and BCPL programs in any screen mode. The business user gets extra memory for View, ViewSheet, Wordwise Plus, Interword and many other applications. For advanced applications, the scientific user gets access to a massive 47k of data storage using the Acorn approved *FX call.

Sideways RAM enables you to load sideways ROM images from disc, allowing you to have a large library of sideways ROMs (subject to the copyright holder's permission) stored on disc. The B32's sideways RAM can also be used to extend any operating system buffer (such as the printer buffer) or to load tape programs into a disc system.

The B32 simply plugs into the 6502 processor socket on your BBC micro – no flying leads to connect and no soldering. Provision of the on-board ROM socket means that the Aries-B32 control ROM does not use up one of your existing ROM sockets.

Price: **£80** (carr. £2)



CREDIT CARD 24 HOUR
Ansaphone Hot Lines
(0923) 50234 or 33383

Aries B-12 Sideways ROM Board

This board is extremely well made, simple to install, reliable when fully loaded and compatible with the Aries-B20 and the Aries-B32.

The B12 provides a total of twelve sideways ROM sockets (the four in the original machine are replaced by the twelve on the board), all fully accessible by the MOS sideways ROM system. In addition, there are two sockets for sideways RAM, giving up to 16k of RAM using 6264 static RAM chips.

The B12 system consists of two parts: a large detachable "mother board" which carries the extension ROM sockets and a small "base board" on a short ribbon cable, which plugs into the existing sideways ROM sockets. This two-board design eliminates the reliability problems previously associated with some other ribbon-cable based systems.

If you do not have a B32 or B20, a small adaptor module (the Aries-B12C) is available at a nominal cost.

Price: Aries B-12 **£40**
Aries B-12C **£5**


ARIES B-488 IEEE-488 INTERFACE UNIT

The Aries-B488 is an interface unit to enable the BBC micro to control and monitor IEEE-488 bus systems. The IEEE-488 bus (also known as the 'GPIB' or 'HP-IB') is the standard method of interconnecting programmable laboratory instruments and control equipment. Using the B488, up to 15 devices may be connected in a single high-speed data network.

£238 (Carr £3)

**All prices in this advert are
exclusive of VAT.**

SIDEWAYS ZIF SOCKET

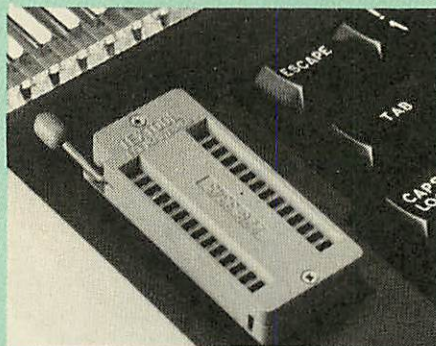

Allows you to change your ROMs quickly and efficiently, without opening the lid. The ZERO INSERTION FORCE (ZIF) socket is located into the ROM Cartridge's position.

- Very simple to install. NO SOLDERING required. The ZIF (Zero Insertion Force) eliminates the possibility of damage to your ROM pins when inserting & extracting.

- The low profile of the socket allows unrestricted access to the Keyboard.

- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.

- This versatile hardware solves the problem of running out of socket space. Simply lift the ROM from the ZIF & insert a different one (No pulling or pushing of Cartridges. It is a must for all professionals and Hobbyists alike.)

- BBC, B+ and Master compatible.

ONLY £15 (carr £2)

Low Profile CARTRIDGE SYSTEM

Complete System consists of: Low profile ROM Cartridge, Socket housing, Cable assembly, 5 labels and a library storage rack for the BBC B.

● Complete System	£11
● Spare Cartridges	£2.50
● Spare Rack	£1.50

16K Sideways RAM Modules

Complete with such features as read and write protection, these new modules from Watford Electronics are ideal for the hobbyist, software developer and ROM collector. Key points to note about this new addition to the Watford range of products are:


- Write protection (useful in a variety of circumstances).
- Read protection (allows recovery from ROM crashes).
- Compact construction.
- May be fitted in systems even with a ROM board.
- Multiple units may be fitted, even with a ROM board.
- No overheating or overloading problems.
- Free utilities disc supplied.
- Can be used as a 16K PRINTER BUFFER.
- Ideal for professional software development.
- Supplied with utilities software disc.

Only: £24 (carr £2)

Optional extras

READ and WRITE protect Switches **£2** each
Battery for Battery Backup **£3**

SOLDERLESS SIDEWAYS ROM SOCKET BOARD

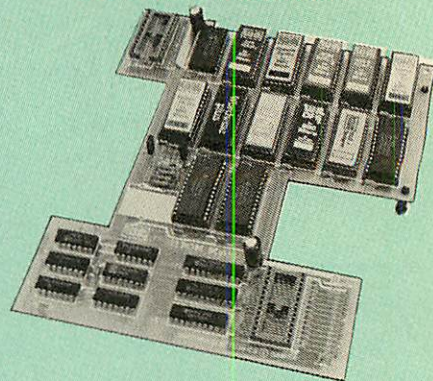

In the May 1986 Micro User's independent review, the writer concludes, "The board has been well laid out. Its position is much better than others – not over the HOT RAM chips and further away from the disc controller area". "I give the solderless ROM board the thumbs up and wish it success".

This brand new board from Watford Electronics is designed specifically for those wishing to add a ROM board to their own BBC without the need to perform any soldering.

This new board expands the total possible number of ROMs in a BBC from 4 to 16.

Unlike our competitors inferior boards, the ONLY upgrade required for fitting battery backup to the Watford Solderless ROM board (all Watford ROM boards, actually) is the fitting of the battery itself. (No other expensive components are required.)


- The key features of this new, no fuss, easy to install quality product from BBC leaders Watford Electronics are as follows:
- Increase your BBCs capacity for ROMs from 4 to 16.
- No soldering required.
- Very low power consumption.
- Minimal space required.
- Compatible with Torch, DDFS, RAM Card, 2nd Processor, etc.
- Socket 14 takes two 6264 RAM chips.
- Read protect to make RAM "Vanish" allows recovery from ROM crashes.
- Battery backup option for RAM chips.
- Supplied ready to fit with comprehensive instructions.

Price: Only £32
Battery backup fitted £36
(carriage £2)

- Sideways RAM Utilities Disc for Solderless ROM Board. Includes the options to load and save ROM Images and the facility to use Sideways RAM as Printer Buffer.

Only: £8


USER PORT SPLITTER UNIT

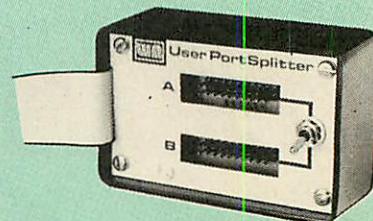

Gone are the days when you had to plug and unplug devices from the User Port. This extremely useful little device allows two units to be connected to the User Port simultaneously, and select between them simply by toggling a switch. This device is particularly useful for those people using Quest Mouse and the Watford Video Digitiser or any similar combination.

Excellent Value at £21

ROM/RAM CARD

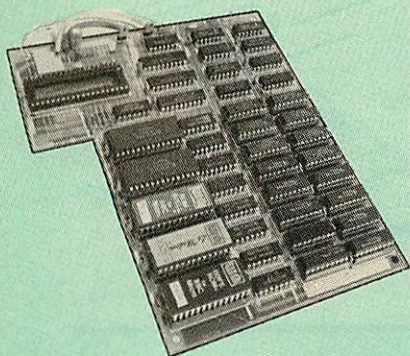

Watford Electronics announced the first ever commercial ROM board for the BBC micro, the Watford Electronics 13 ROM Socket Board 3 years ago. Following the success of this board, we have designed what probably represents the ultimate in expansion boards, the new Watford Electronics ROM/RAM board. This highly versatile and sophisticated board represents the latest in "2nd generation" sideways ROM technology for the BBC micro, designed to satisfy the serious BBC user.

- NO SOLDERING required to fit the board.
- NO overheating problems.
- No User Port corruption (avoids problems with the mouse, modems, Eprom Programmers, etc.)
- Fully buffered for peace of mind.
- Firm mounting in BBC micro.
- Compatible with all BBC micros (not BBC+ or Master).
- Total number of ROMs increased from 4 to 8.
- Up to 8 banks of sideways RAM (dynamic).
- Option for 16k of Battery backed CMOS RAM (CMOS RAM needs one ROM socket).
- Software Write protect for ALL RAM.
- Read protect for CMOS RAM (ALLEVIATES crashes during ROM development).
- Separate RAM write register (&FF30 to &FF3F).
- Automatic write to currently selected RAM socket for convenience.
- Accepts any ROM.
- FREE utilities disc packed with software.
- Compatible with our DDFS board, 32k RAM Card, Delta Card, sideways ZIF, etc.
- Large printer buffer.
- UNIQUE Fully implemented RAM FILING SYSTEM (similar to the popular Watford DFS).
- ROM to RAM load and save facilities.

The SFS (Silicon Filing System) can utilise up to the full 128k of RAM (with the SFS in any paged RAM) as a SILICON DISC. This behaves as a disc drive, with all the normal Watford DFS features (including OSWORD &7F for ROM-SPILL, etc.) to provide an environment that looks like a disc but loads and saves MUCH faster.

The ROM-RAM Board plugs into the 6502 CPU socket. This leaves free all the existing ROM sockets, which can still be used normally.

Any ROM that can be plugged into the BBC micro's own ROM sockets may be used in the ROM-RAM Board.

The ROM-RAM Board is supplied with all ordered options fitted as standard. Upgrade kits (with full instructions) are available for all of the options, for later.

Please write in for further details.

INTRODUCTORY PRICES:

- ROM/RAM card with 32k dynamic RAM£39
- ROM/RAM card with 64k dynamic RAM£52
- ROM/RAM card with a massive 128k dynamic RAM£80

(carriage on ROM-RAM Card £3)

OPTIONAL EXTRAS:

- 16k plug-in Static RAM kit.....£6
- 16k Dynamic RAM for Upgrade.....£7.50
- Battery backup.....£3
- Read and Write protect switches.....£2 each
- Complete ROM-RAM board
- All options installed£89

P.S.

Is your existing ROM Board overflowing with ROMs? Do you need more Sideways RAM? Is your Board unreliable? Then upgrade to Watford ROM/RAM Board and pay £10 less

Le Modem



The MODEM from Watford


At last a professional MODEM for the BBC Micro. Unlike other 'Modem packages' this is a complete package there are no extra software costs to get 'up and running'. Of course Le MODEM is multi-standard, i.e. 300/300, 1200/75 & 75/1200 UK and BELL (USA) are all supported.

The features that make Le MODEM such good value are:

- A complete communications terminal that transforms your BBC Micro into a very powerful World-wide data transfer system.
- Auto Dials, Auto answers, and is completely controlled by your micro. There are no external controls!
- Allows you to access PRESTEL, B.T. GOLD, THE SOURCE, MICROLINK, MICRONET, MICROWEB, THE TIMES NETWORK, MICRO LIVE (BBC TV database), CITY BB and more.
- Designed to be SIMPLE but SOPHISTICATED. To LOGON to a data base all you have to know is its TELEPHONE NUMBER, Le MODEM does the rest.
- Supplied with a comprehensive telecomms package in a 16K sideways ROM which includes a FULL PRESTEL terminal allowing TELE-SOFTWARE to be downloaded.
- A comprehensive 80 column terminal. This includes XMODEM error checked transfer protocol, to allow error free data transfer anywhere in the world!
- FULLY controlled by simple **COMMANDS allowing you to control it from your own BASIC programs. To get you started we supply a FREE disc of bundled software!
- Connects to the 1MHz bus. A *AUDIO ON-OFF command allows you to actually hear the telephone line through your BBC micro loudspeaker.
- Completely self contained with internal mains power supply. (Even a free mains plug is fitted!) A *TEST facility gives ON SCREEN indication that Le MODEM is working correctly.
- Packaged in such a way that you need nothing else except a BBC Micro to communicate with computers all over the world.
- FREE Registration to MicroLink.

SPECIAL OFFER

Price: **£94**
(carr £3)



(Price includes, Le Modem, Software ROM, Cables & Comprehensive Manual)
(Write in for further details)

Minerva Systems Software

System Delta with Card Index	£55
System Programmers Ref. Guide	£19
System Gamma	£43
System Gamma Prog. Ref. Guide	£19
System Mailshot	£17
System Reporter	£17
System Inter/View Link	£17
System Sales Ledger	£39
System Purchase Ledger	£39
System Nominal Ledger	£48
System Stock Management	£39
Order Processing/Invoicing	£39

APOLLO



The NEW Modem from Watford

Following numerous requests from you, our discerning customers for an APPROVED, Low Cost & High Performance modem with Auto Dial & Auto Answer facilities as standard we bring you the versatile APOLLO Modem. Just compare the features and look at the price (which incidentally includes the cost of the Software, manual and BBC connecting cable). We are sure you will agree that Watford Electronics in their traditional way are giving you a super 'value for money' deal.

Just look at these features:

- V21 for Bulletin boards, Microlink, Telecom Gold, etc.
- V23 for Prestel, Home Banking, and other Viewdata services.
- Reverse V23 allows User run Viewdata service.
- 1200-1200 half duplex for communications.
- XMODEM, HEX and ASCII file transmission.
- Auto Dial of given 'phone number.
- Auto Answer for User's Bulletin Board.
- 80 column terminal with split screen facility.
- Prestel text screen dump.
- Fully BABT approved.
- FREE Registration to MicroLink.
- £6.50 off annual Membership to Micronet, Prestel and Telecom Gold.

The Apollo is attractively finished in matt black. It opens the doors to world communication to both, the Hobbyist and the Professionals alike. With baud rates varying from 300/300 Originate and Answer, 1200/75 and 75/1200 full duplex and 1200/1200 half duplex, virtually all the popular tele-services can be accessed. A comprehensive Comms ROM oversees the use of the APOLLO, providing simple commands for all the software controlled facilities. APOLLO is an ideal modem for both the first time buyer and the seasoned user. Join the Telecommunications Revolution – Buy a Watford APOLLO!


Only: **£94** (Carr £3)

Price includes, the Modem, Comm Software Cables & Operating Manual).
(Write in for full specification)

Nightingale Modem

SPECIAL PRICE to our Customers

£82



(Price includes: Nightingale Modem, Commstar ROM pack & Comprehensive manual)

Nightingale Modem without software Only **£75**
COMMSTAR ROM package only **£29**
(P&P on modem £3.00)

Versatile BEEB SPEECH SYNTHESISER Unit



The Watford Speech Synthesiser is a very flexible speech synthesis unit based upon the powerful phonemes system. This system stores the building blocks of speech (called phonemes) and allows you to combine them quickly and easily to form virtually any word imaginable.

Supplied with an advanced ROM, you are provided with a 500 word dictionary to get you started. These can easily be added to by following the notes given in the comprehensive manual.

SPECIAL PRICE **£32** (carr £2)

Continued

COMPUTER CONCEPT'S ROMS

ACCELERATOR	£48
CARETAKER Basic Utility	£25
DISC DOCTOR	£28
Graphics ROM	£23
TERMI	£25
COMMUNICATOR	£49
SPEECH ROM	£24
Printmaster	£24

Wordwise

£24

Wordwise plus

£40

We are giving away absolutely **FREE**, the superb Word-Aid ROM worth £24, with every WORDWISE PLUS package bought from us.

Word-Aid

The most comprehensive utilities ROM for Wordwise-Plus

Extend the power of your Wordwise Plus word processor with this most advanced ROM from Watford. By utilising the powerful Wordwise Plus programming language, WordAid provides a whole host of extra features, all accessed via a special new menu option. This ROM has been personally approved by Mr Charles Moir, the author of WORDWISE PLUS.

- Alphabetical sorting of names and addresses.
- Text transfer options.
- Chapter marker.
- Epson printer codes function key option.
- Search and display in preview mode.
- Embedded command removal.
- Print Multiple copies of a document.
- Multiple file options for print and preview.
- Address finder.
- Label printer.
- Mail-merger.
- Number/delete/renumber.
- Clear text-segment area.
- BBC B, B+ and Master compatible.

Only £24

(N.B. Word Aid requires a Disc Interface in your Micro)

HI-WORDWISE-PLUS DISC: £5

SPELL MASTER £45

Inter SHEET ONLY £37

INTER-CHART

ONLY: £26

Inter-WORD

£39

MEGA-3 ROM

Interword, Intersheet & Interchart – 3 in one ROM

£85

INTERBASE £55

All Prices Exclusive of VAT

VIEW

VIEW WORDPROCESSOR 2.1 £35

VIEW 3.0 ROM £48

VIEW PROFESSIONAL £79

HI-VIEW £36
(for use with 6502 2nd Processor)

VIEW Printer Driver Generator £9
(Please specify Disc or Cassette)

VIEWSHEET (Acornsoft) £37

VIEWSTORE £37

VIEWSPELL with 80 track disc £29

VIEWPLOT Disc £22
(Please specify for Master 128 or Compact)

VIEW-INDEX £12

OVERVIEW Packs 1 & 2 for the Master £75

Watford's own Sophisticated VIEW PRINTER DRIVERS

Epson FX80 & Kaga KP (Disc) £8
Juki & Brother HR15 (Disc) £8
Silver Reed Printers (Disc) £8

Micros in Business (Disc)
An introduction to Business software for the BBC Micro from Acorn £43

ADVANCE COMPUTER PRODUCTS' ROMS

Adv. Disc Toolkit £29
Adv 1770 DFS for Mast/Compact £29
Adv 1770 DFS for BBC/BBC+ £29
Adv Disc Investigator £24
Adv. Control Panel £29

MINI OFFICE II

Disc Version £14.50
ROM Version £47.00


REPLICA 3

This new improved REPLICA 3 from Clares is a very powerful disc based TAPE to DISC Utility. It now transfers even more programs than ever before. Replica 3 will not work with all programs but then neither will anything else. 30,000 Replicas have been sold to date. It has to be good.

£13 (40 or 80 track)

Acorn's Speech Synthesiser package, complete
Special Offer £18

VIEW PRINTER DRIVER ROM

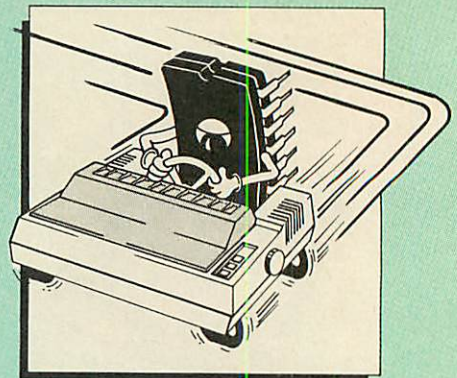

View is a powerful word processor, but until now has seriously lacked in terms of printer support. With the launch of our Printer Driver ROM, which includes an extremely powerful and easy to use Printer Driver Generator, View users can find themselves in the realms of advanced word processing only at a small outlay.


The VPD extends View's printer command with a series of mnemonic commands. All standard highlight sequences are also supported. A large range of printers are supported by drivers contained within the ROM (the drivers can be downloaded and customised). Printers supported include: Epson's MX, RX, FX, LX, JX80 range, HI80, KP810/910, PW1080, JP101, HR15, M1009, GLP, Panasonic KX-P1081/2, JUKI 6100, etc.

Other printers are readily supported by defining a Printer Driver using the built in Printer Driver Generator. The features mentioned below are available to both the built in Printer Drivers and user defined drivers (assuming the printer supports the features).

NLQ control, Underline, Bold, Proportional Spacing, Microspacing, Italic, Superscript, Subscript, Condensed, Enlarged, Double Strike, Set lines per inch numerically (e.g. LPI 6), Set characters per inch numerically (e.g. CPI 5), Select printer font, Select printer ribbon colour, Translation sequences, Emulation of BBC Character Set, Simple numeric expressions for certain operations, Full printer setup, Send control codes, Print prompt on screen, Redefinable Pad character, Pause for key press, Prompt to change daisywheel, and Execute * command when printing.

Other features include a very powerful on screen preview, with bold, italic, underline, super/subscript, enlarged highlights, and a special printer driver to allow memory based text to be previewed by View 1.4. Of course, View 1.4, 2.1 and 3.0 are all supported, as is Shadow RAM and 6502 Second Processors. The BBC B series and Master series of micros are supported. A comprehensive manual is supplied. All in all, a very professional product for the discerning user who wants power at their finger tips. (Write in for a detailed leaflet).

Price: Only £33

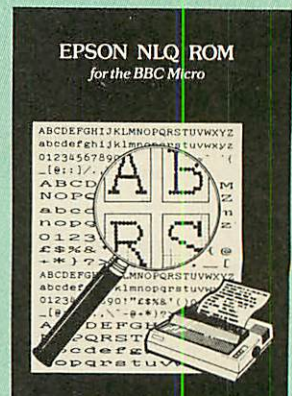

Harness the full potential of your Epson RX or FX printer. The NLQ ROM makes Epson printers produce Near Letter Quality output with optional proportional spacing, enlarged and underlined. Accessed by simple * commands from Basic, Wordwise and View (with driver) or almost any other language.


(Send an SAE for sample printout)

Only: £25

VIEW PRINTER DRIVER for NLQ ROM

£7

DUMPOUT 3

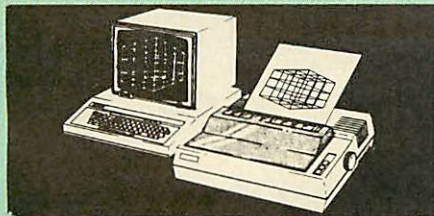

A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including full Mode 7 graphics. Also provided are window setting utilities and OSWORD calls to plot and read Mode 7 graphics pixels.

Facilities:

- Vertical and horizontal scaling in all graphics modes and mode 7
- Rotation of image by 90, 180 or 270 degrees
- Left hand margin setting
- Screen dump window setting
- Colours appear as grey scale
- Two tone fast dump
- Colour mask
- Mode 7 contrast expansion
- Mode 7 contiguous dump
- Key triggered and User Port triggered dumps

The Micro User Feb. 1985.

'Without reservation I wholeheartedly recommend the Dump Out 3 ROM as the ultimate screen dump facility for the BBC Micro ... it must represent excellent value for money and surely cannot be beaten'.

For use with the following printers:

GLP, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, M1009, NEC PC8023, DMP100/200/400, Panasonic KX1081/82, Mannesman Tally and compatibles.

Only: £25

BBC SOFTWARE'S Popular Educational Software

- Maths with a Story 1 (Cassette). 4 primary level maths programs **£9.95**
- Maths with a Story 2 (Cassette) 4 further maths programs **£9.95**
- Picture Craft (Disc) 6 - 14 age group. Pack consists of flexible geometrical design & colouring programs **£17**
- WAVES: Science Topics (Disc) CSC O Level Physics program. **£14.95**
- RELATIONSHIP: Science (Disc) O Level Biology program. **£14.95**
- BONDING: Science (Disc) O Level Chemistry program. **£14.95**
- ELECTROMAGNETIC SPECTRUM (8 Discs) O Level program. **£14.95**
- ELECTRONICS IN ACTION (Disc) O Level program **£14.95**
- NEWTON & THE SPACE SHUTTLE (Disc) O Level program. **£20**
- ECOLOGY (Disc) O Level program. **£20**
- POLYMERS (Disc) O Level program. **£20**
- Classification & Periodic Table O Level. The suite is supplied with its own database of chemical elements which can be classified according to your own rule. **£20**
- FOOD & POPULATION (Disc) O Level program. **£20**
- MICROTECHNOLOGY (Cassette) O Level program. **£6.95**
- A VOUS LA FRANCE (2 Cassettes) A French language home study aid. **£17**
- DEUTSCH DIREKT! (Disc & Audio Cassette) **£20**
- Modem Master (Disc) **£11.25**
- ADVANCED TELETEXT SYSTEM **£9**
- PERIOD TABLE SOFTWARE **£20**
- USING YOUR COMPUTER (Cassette) 8-12 age **£24**
- Astronomy - Primary Disc **£11**
- Computers at Work - Primary **£16**
- Introducing Geography - Primary **£16**
- Electric Fields 6-14 years **£10.50**
- Statistics A level **£23**

THE NLQ DESIGNER


(The First & still the Best)
Supplied with over 25 Different fonts

A massively useful utility for users of the Taxan/Kaga KP810/910 or the Canon PW1080. This program allows you to define NLQ character sets to download into the printer's memory. Full on screen editing of the font. Requires 6264 RAM chip to be fitted in the printer.

Supplied with disc containing over 25 example fonts. (Please specify 40 or 80 track when ordering.) Fonts are: Italic, Courier, Courier Italic, Script, Copper Plate, Shadow, Bold, Double Print and Gothic etc. (P.S. This ROM is not suitable for Epson printers.)

- NLQ Designer ROM, FONT Disc and Manual **£25**
- (Write in for further details on all above ROMS)

ADDER

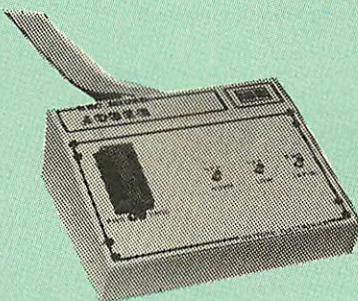

The only low cost EPROM Programmer for the BBC Micro that will program both the standard 21V and the new 12V5, 27128 EPROMS. Adder is the ultimate EPROM programmer for the BBC Micro. It will program many different EPROMs up to the very latest 27256 32K devices.

The Adder unit connects to the User Port and draws its power from there too. The EPROM is mounted in a top quality ZIF socket. There are no switches or controls as Adder is entirely software controlled.

The Adder software provides sophisticated facilities for programming EPROMs from a RAM image produced by loading disc files. The software is menu driven and designed for ease of use.

Features:

- Two ultra fast programming algorithms or standard slow algorithm.
- Supports standard 21V programming and newer 12.5 volt EPROMs. (Software switched).
- The RAM image to be programmed can be built up in many ways. Sections of image can be loaded separately. Part programming. Read EPROM. Edit data in memory.
- Automatic processing to handle a list of files to program into the EPROM.
- Automatic disc buffering to allow programming of 32K 27256 devices from a 32K file without extra effort.
- Verification gives detailed error list and checksums are maintained. There is also a blank check facility.
- Works with all standard filing systems. Generates header code for RFS ROMs to allow Basic programs etc. to be stored in EPROM. More than one file per ROM permitted.
- Programs the following EPROMs: From 2K to 32K: 2516, 2716, 2532, 2732, 2764, 2764A, 27128, 27128A, 27256 (Both 12.5V and 21V).

£75 (£3 Carr)


TEX EPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

- ERASER EB - Standard version erases up to 16 chips. **£28 (carr £2)**
- ERASER GT - Deluxe version erases up to 18 chips. Has automatic safety cut-off to switch off the UV lamp when opened. **£30 (carr £2)**
- Spare UV tubes. **£9**

32K

SHADOW RAM- Printer Buffer Expansion Board

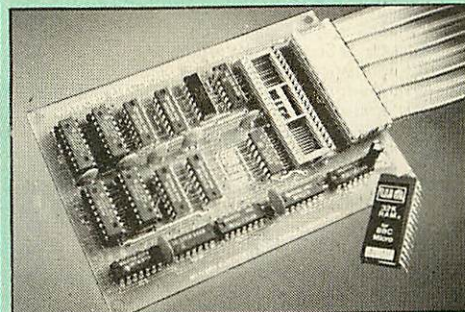

A MUST FOR WORD PROCESSING

Watford Electronics now brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. Don't throw away your BBC B for a BBC B Plus or BBC Master. Just plug the ribbon cable into the 6502 processor socket, and fit the compact board inside the computer. Immediately you will gain not 16K or even 20K, but a massive 32K of extra RAM!!!

- IMPROVE your WORD PROCESSING system, whether disc or cassette based. Don't wait for a slow printer - type in text while printing. TWO JOBS DONE SIMULTANEOUSLY and £100+ saved on a printer buffer.

- "VIEW" Wordprocessor users can now type in letters in 80 columns and have up to 28,000 bytes free - 5 times as much as normal.

- In WORDWISE (or WORDWISE-PLUS), preview in 80 columns with the full 24K of text in memory. This product is recommended as an ideal complement by Computer Concepts.

- Combine GOOD GRAPHICS and LONG PROGRAMS. Use the top 20K of the expansion RAM as the screen display memory, leaving all the standard BBC RAM free for programs. Benefit from MODE 0/1/2 graphics and 28K of program space.

- Use the FULL 32K or the bottom 12K of the expansion RAM as a PRINTER buffer for PARALLEL or SERIAL printers, sound channels, RS423 etc. Print large text files while running long graphics programs, and have all your buffer options available as well (*FX15,21,138,145,ADVAL etc). Please note only a 12K printer buffer can be used with Wordwise or Wordwise-Plus, due to the way they are written.

- Unique facility to turn ROMs off and on again. Unlike all other ROM managers, this feature does not use 'unofficial' memory. Two bytes of normally user-inaccessible memory on the RAM card are used to ensure ROMs are disabled WHERE OTHER ROMS FAIL.

Only £59 (carr £2)

(Price includes a comprehensive manual and the ROM)

INCREDIBLE WORDPROCESSING DEAL

Watford's 32K SHADOW RAM CARD and Computer Concept's INTERWORD Wordprocessor package.

at Only **£89** (carr £2)

Continued

BOOKS (No VAT on Books)

15 Hr Wordprocessing BBC/View	£4.95
15 Hr Wordprocessing BBC/WW & WW+	£4.95
30 Hour BASIC (BBC Micro)	£9.95
40 Best machine Code Routines	£7.95
50 Programs in BBC BASIC	£6.95
6502 Assembly Language Program	£19.95
6502 Application	£11.95
6502 Assembly Lang. Subroutines	£19.95
6502 Development Package	£7.50
6502 Reference Guide	£10.95
68000 Assembly Language Prog.	£19.95
68000 Machine Code Programming	£13.00
68000 Microprocessor Handbook	£14.95
68000 Programming the	£22.95
68000 User Guide	£8.95
6809, Programming the	£16.95
6809 Machine Code Programming	£7.95
8086/8088 Assembly Language Prog.	£11.95
8086/8088 Programming the	£16.95
Advanced Disc User Guide	£16.95
Advanced Prog. Guide to BBC	£9.95
Adv. Sideways RAM User Guide	£10.95
Advanced User Guide for BBC	£10.95
Advanced Graphics with BBC	£10.95
Assembly Language Programming on BBC Micro	£11.50
Adventure into BBC BASIC	£6.95
Amiga Hardware Ref Manual	£23.70
Applied Assembly Lang. for BBC	£9.95
ARM Assem. Lang. Programming	£12.95
Art of Microcomputer Graphics	£15.95
Assembly Language Programming FOR the BBC Micro	£9.50
Assembly Lang. with in BBC	£11.95
Basic ROM User Guide	£11.95
BBC B Compendium	£5.95
BBC BASIC for Beginners	£7.95
BBC Forth	£7.50
BBC Hardware Projects	£8.95
BBC Micro & Small Business	£5.75
BBC Micro & the small Business	£5.75
BBC Micro Advance Programming	£8.95
BBC Micro Basic Sound & Graphics	£7.95
BBC Micro Programming Tips	£8.95
BBC Micro ROM Book	£10.95
BBC Master 128 for High Flyer	£10.95
BBC Micro Disc Companion	£8.95
BBC Software Projects	£6.95
BCPL User Guide	£14
BCPL The Language & its Compiler	£7.95
C Big Red Book of	£7.50
C for Beginners	£10.95
C for Programmers	£9.95
C Programming Lang.	£23.95
Complete FORTH	£6.95
Computer Graphics & CAD fundamentals	£9.95
CP-M-86 User's Guide	£19.95
CP-M Bible	£16.50
CP-M Handbook with MPM	£9.95
CP-M Plus Handbook	£13.95
CP-M Soul of	£16.50
CP-M The software BUS	£8.95
Disc Drive Projects for Micros	£5.45
DISC FILING SYSTEM (DFS)	
Operating Manual for BBC	£6.95
DBASE Programming Language	£14.95
dBase III Plus	£12.95
dBASE III Plus, Quick Ref. Guide	£4.95
dBase III Tips & Tricks	£14.25
Disc Programming Techniques	£9.95
Exploring FORTH	£6.95
File Handling on BBC Micro	£7.50
FORTH - Acorn	£7.50
FORTH - Advanced	£9.95
FORTH - A Text Reference	£19.10
FORTH on the BBC Micro	£9.95
FORTH - Starting	£19.10
Functional Forth for the BBC Micro	£5.95
Guide to BBC ROMs	£9.95
Graphics for Children	£6.95
Hackers Handbook - New	£6.95
Inside Information (Computers, Interfacing & Control) to BBC Micro	£9.95
Interfacing & Robotics on BBC	£15.95
Introduction to COMAL	£9.50
Introduction to LOGO	£6.95
Introducing 'C'	£9.95
Introducing LOGO	£5.95
Introduction to FORTH	£8.95
Introduction to PASCAL	£17.95
ISO - PASCAL Reference Manual	£9.95
LISP 2nd Edition	£15.95
LISP, A Beginners Guide to	£10.95
LISP on the BBC Micro	£7.95
LISP the Language of Artificial Intelligence	£9.95
Logo on the BBC Micro	£7.50
Logo Programming	£10.95
Mysteries of DISC DRIVES and DFS REVEALED	£5.95
Mastering Assembly Code	£8.95
Mastering CP-M	£17.95

Mastering Interpreters & Compilers	£14.95
Mastering Music	£6.95
Mastering the Disc Drive	£7.95
Mastering Operating System	£12.95
Master Reference Manual Part 1	£14.00
Master Reference Manual Part 2	£14.00
Master, Advance Reference Manual	£19
Mathematical Prog. in BBC Basic	£7.95
Micro Prolog	£10.00
Microtext for the BBC	£10.00
MS DOS Quick Reference Guide	£3.95
Practical Disc File Techniques	£5.95
Programming the 6502	£16.95
Programming the Z80	£19.95
Software Business	£5.50
Structured Basic	£7.95
The Epson FX-KAGA PRINTER Commands REVEALED	£5.95
The Software Business	£5.50
Toolbox 2	£10.95
Towers Int. Transistors Selectors	£12.95
Turtle Graphics on BBC Micro	£7.50
Understanding Interword - A Beginners Guide	£6.50
Using DOS + Amstrad PC	£9.95
View 3.0 User Guide	£10
View Guide	£4.50
Mastering View, Viewsheets & Viewstore	£12.95
VIEW Dabhand Guide	£12.95
VIEW incl. ViewSpell & ViewIndex	£12.95
Viewsheets User Guide	£10
Viewstore User Guide	£10
Within the BBC Micro	£13.95
Writing Interactive Interpreters & Compilers	£8.45
Wordprocessing BBC Beginners Guide	£7.95
Wordstar & CP/M made easy	£9.95
Wordwise + A User Guide	£9.95
Z80 Applications	£15.95
Z80 Assembly Language Prog.	£19.95
Z80 Reference Guide	£9.95

NEW

THE COMPLETE BBC COMPUTER USER HANDBOOK

"Why has no-one written a book like this before? It's long overdue!"

If you own a BBC-B, BBC B+, Electron, Master 128, Master Compact or Archimedes then this book is for you. It shows you how to get the most from your computer, and how to make the computer work for you. Although some sections are machine specific, most of the information, programs, hints and good solid experience are for the whole range of BBC machines. The general style and level means that both beginner and expert will feel satisfied with the quality and quantity of the material.

GENERAL - Uses and abuses of computers.

HARDWARE - How to design your own work station. Hardware additions (disc drives, ROMs, printers, 2nd processors, etc). DIY alterations.

HARDWARE RUNNING BBC-BASIC - All BBC machines are described with their differences. Compatibility between the various BBC machines. Networks. The Archimedes and its advantages.

GETTING ORGANISED - so that you keep track of your programs and control of your software. Setting up for easier programming sessions.

NEAT PROGRAMMING - Good style. Writing structured programs. Getting the best from BBC-BASIC, Graphics and screen displays. Speeding up programs. Saving space.

GENERAL PROGRAMMING TIPS AND HINTS - with a multitude of examples (eg input vetting, dealing with dates, blanking out function key messages, error trapping, disabling ESCAPE and BREAK, use of EOR with colour, etc).

DEBUGGING - Specific errors and how to handle them. How to test programs fully.

STANDARD PROGRAMS - Assessing word-processors, spread-sheets, databases, graphics packages, communications etc. How to customise them to your own requirements.

COMPUTERS AT HOME AND IN THE OFFICE - Introducing the computer to the office. Program protection. Computers and the law. Communications. Selling your own programs. 28 FULL CHAPTERS, elegantly written and extensively indexed. To dip into, consult, or read from cover to cover, again... and again... and again...

Only: **£14.95**

BEEB VIDEO DIGITISER



Using any source of composite video (colour or monochrome) and the Watford Beeb Video Digitiser, you can convert an image from your camera into a graphics screen on the BBC Micro.

This uses the full graphics capacity of the BBC micro in modes 0, 1 or 2. The video source may be a camera, video recorder or television, and is connected via the video output socket.

Images produced can be compressed, stored to disc, printed on an Epson compatible printer, directly used to generate graphics, analysed for scientific and educational use or converted to other formats e.g. Slow Scan TV or receiving a picture from a remote camera using a modem.

The output from the digitiser exactly matches the graphics capability in each mode, with up to 8 levels of grey in mode 2. The unit connects into the User Port and automatically scans a complete picture in 1.6 seconds.

Both the black and white levels can be adjusted manually for the optimum picture, or switched to automatic for unattended use. The image produced can be reversed if necessary.

Full controlling software is supplied on a normal sideways ROM and this is easily accessed via additional * commands. The package is designed to allow easy input of complex screens and give full access of the data to the user. Once on the screen, the image can be used as a normal graphics screen, allowing any of the usual graphics commands in BASIC or other ROM's to work on it.

A special print dump routine is included with the driver programs. This is specially designed to produce a fast, correctly proportioned picture, with reduced "contouring", resulting in an accurate reproduction of the original image.

Detailed examples of driving this unit from BASIC or other languages are all provided in the extensive manual supplied.

£109 (Carr. £3)

(Price includes) Digitiser Unit, Software in ROM & a Comprehensive Manual)
(BBC B+ and Master compatible, except Master with Econet)

Magazine Maker

(As seen on TV)

A combination of the Pagemaker and Watford's Beeb Video Digitiser.

Using any video that provides a composite signal and the digitiser, images from a camera or TV can be converted into a graphics screen on the BBC Micro.

They can then be used within Pagemaker to illustrate magazines or newsletters - in fact anything that needs to be created on A4 size paper.

With Pagemaker's many features, a variety of pictures can be composed - the only limit being the imagination.

Pictures can be doctored using Pagemaker's graphics option to produce any number of effects.

Text can be formatted around the digitised photo on screen using the facilities available, which include 16 typefaces, character and pattern definer, text formatting and the ability to load in wordwise and viewfiles plus much more.

Once created the picture can be printed out. The Magazine Maker is suitable for any use that requires illustrated documents.


Complete Package **£135.00 (carr. £3)**

SURGE PROTECTOR Plug

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources which put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. A must for every computer user.

Protection for only **£7.50**

4 WAY MAINS DISTRIBUTION SOCKET

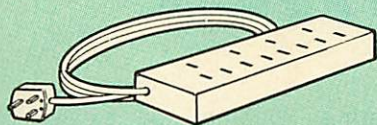

4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals.

£7.95 (carr £1.50)

SPIKES CLEANER UNIT

A 4 way mains distribution unit as above with a built-in Surge Arrester, providing protection for your complete computer system

£13.50 (carr. £1.50)

SPARES for BBC Micro

Keyboard	£43	Keystrip	£2
UHF Modulator	£4	Case	£20
Speaker Grill	£1	Speaker	£2
Power Supply	£52	Keyswitch	£1.50

Replacement FLEXIBLE 17 way Keyboard Connector £3

8 WAY DIP SWITCH

Increase the speed of your Disc Drives by soldering this switch to your BBC B or B+ Keyboard.

Only **£1.00**

28 pin ZIF SOCKET (Textool) £6.95

Watford DATA DUCK

Convert two single Disc Drives into one Dual Drive with this simple external unit (suitable for disc drives with PSU).

£14

Watford POWER DUCK £8

CONNECTING LEADS

(All ready made and tested)

CASSETTE LEADS 7 pin DIN Plug	
to 5 pin DIN Plug + 1 Jack Plug	£2.00
to 3 pin DIN Plug + 1 Jack Plug	£2.00
to 7 pin DIN Plug	£2.50
to 3 Jack Plugs	£2.00
6 pin DIN to 6 pin DIN Plug (RGB)	£2.50

DISC DRIVE POWER LEADS

Supply from BBC power supply to standard Disc Drive connector.

Single **£3.00** Dual **£3.75**

DISC DRIVE INTERFACE LEADS

BBC to Disc Drives Ribbon Cable

Single **£4** Twin **£6**

Miscellaneous Connectors

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	80p	200p
BBC Power Plug 6 way	80p	-
Disc Drive Plug 4 way	75p	-
6 way Power Connector	-	95p

VOLTMACE JOYSTICKS

Delta 3B Single Joystick	£12
Delta 3B Twin Joysticks	£17
Delta 3C Joystick for Compact	£10
Delta 14B Single Joystick	£12
Delta 14B/1 Adaptor Module	£12
Transfer Software Disc-Tape	£7

ROM EXTRACTION TOOL

This extremely useful tool allows you trouble free chip insertion and removal from your computer by distributing the removal force over the whole body of any 24 or 28 pin chip.

£2

ATTACHE CARRYING CASE

For the BBC Micro. Attractively finished in antique brown leatherette. Lockable.

Only **£10** (£2 carr.)

Antistatic Aerosol Spray

Ideal for cleaning and preventing static build-up on TV/Monitor Screens.

£2.50

28pin DIL HEADER PLUG

SOLDER type	£1.50
IDC CRIMP type	£1.95

CHIP SHOP

		ASSORTED ROMS	
8271	£36.00	ACORN ADFS	£25
DS3691	£3.50	ACORN BASIC 2	£19
DS88LS120	£5.25	Acorn BCPL	£42
LM324	£0.45	Acorn COMAL	£38
SN76489	£5.50	ACORN DNFS	£17
SAA5050	£8.75	Acorn FORTH	£32
UPD7002	£4.40	Acorn Graphics	£25
2764-250nS	£3.00	Acornsoft C	£74
27128-250nS (12V5)	£3.25	Acorn LISP	£19
27128-250nS (21V)	£4.25	Acorn LOGO	£49
27256	£4.20	Acorn OS B+	£25
27512	£9.50	Acorn OS 1.2	£14
27C101G (1 Meg)	£20.00	Basic Editor	£24
4013	60p	Beebfont	£25
4020	£0.90	Beebmon	£22
4464-12	£4.45	BROM Plus	£32
4464-15	£3.75	Buffer & Backup	£20
4816 RAM	£1.75	Communicator	£49
41256	£2.45	Graphics Extension Rom	£21
6264LP-8K	£2.50	GXR-B	£22
6502A CPU	£4.75	GXR-B+	£27
65C02 3M	£9.75	Help II	£51
65C12	£9.00	ISO Pascal	£30
6512A	£10.00	ISO-Pascal Stand	£28
6522	£3.40	Alone Generator	£45
6522A	£5.00	ICON Master	£34
65256ALS-15	£8.00	Logotron LOGO	£62
6845SP	£6.00	Master Termulator	£48
68B50	£2.95	Micro Prolog	£199
68B54	£7.50	Microtext Disc	£47
7438	40p	Mini Office ROM	£21
74LS00	25p	MUROM	£29
74LS04	25p	ROMAS	£29
74LS10	25p	ROMIT	£13
74LS123	80p	Serial ULA	£28
74LS163	70p	TERMULATOR	£31
74LS244	80p	Toolkit Plus	£14
74LS245	£1.00	Video ULA	£26
74LS373	£2.75	ULTRACALC	
74LS393	£1.00		
75453	70p		

Watford Dealers' List

UNITED KINGDOM

Alpha Microtec Ltd, 321 Stratford Road, Shirley, Solihull, West Midlands. Tel: 021-745 8998.

Badger Micros (Devon), Badger's Hill, Southerton, Ottery-St. Mary, Devon EX11 1SE. Tel: 0395 68516.

Beebug Retail, Dolphin Place, Holywell Hill, St. Albans.

Cambridge Computer Store, 4 Emmanuel St., Cambridge CB1 1NE. Tel: 0223 358264.

Cirkit Distribution Ltd, Park Lane, Broxbourne, Herts.

C.J.E. Micros, 78 Brighton Road, Worthing, West Sussex. Tel: 0903 213361.

HCCS, 575-583 Durham Road, Low Fell, Gateshead, Nr. Newcastle Upon Tyne. Tel: 091 4870760.

Mancomp Ltd, Printworks Lane, Levenshulme, Manchester. Tel: 061-224 1888-9888.

Microman Computers, Pasture Lane Farm, Pasture Lane, Rainford, St. Helens, Merseyside WA11 8PU. Tel: 074488 3667.

The Computer Depot, 205 Buchanan Street, Glasgow G1 2JZ. Tel: 041-332 3944.

Verospeed Ltd, Boyatt Wood, Eastleigh, Hants.

OVERSEAS DEALERS

*Absolute Electronics, Rewal House, 208-210 La Trobe Street, Melbourne, 3000, Victoria, Australia. Tel: (03) 663 2411.

Alpha Computer Co, Shop 314 Chi Fu Commercial Centre, Chi Fu Fa Yuen, Hong Kong. Tel: 5-506592.

Computer Distribution Company, Parklaan, 47, 8-9300 Aalst, Belgium.

E.B.N., Elisenstrasse 13, 1000 Berlin 41. Tel: (030) 7952057

Lendac Data Systems, Unit 31, IDA Enterprise Centre, Pearce Street, Dublin 12. Tel: 710796.

Scientex P.V.B.A., Zilvermidstraat 2, B-2000 Antwerpen, Belgium. Tel: 03 233 59 06

Techno-matic Data, Holbergsgade 19, 1057 København K, Denmark

*Velobyte, Scheaedyksadyk 5a-6a, 3011 EB Rotterdam, Holland. Tel: (010) 413 8197/414 5171.

Viking Tecno, Vestergade 12.1, 9620 Aalestrup, Denmark. Tel: 08 642522

*Acorn/Watford Referral Centres.

Viglen Console Unit

Enhance the appearance and convenience of your BBC Micro & Master with the Viglen console unit.

BBC **£45**; Master **£55** (carr. £4)

Prices subject to change without notice and available on request. ALL OFFERS subject to availability.

Mail Order and RETAIL SHOP. Trade and Export inquiries welcome.

Government and Educational Establishments' OFFICIAL ORDERS Accepted.

Shop Hours: 9.00am to 6.00pm. Monday to Saturday. Thursdays 9am to 8pm. (Free Customer's Car Park)

VAT: UK customers please add 15% VAT to cost incl. Carriage.

CARRIAGE: Unless stated otherwise, minimum £1 on all orders. £2 on Larger items.

On bulkier items, £7 Securicor charge applies (UK mainland only). Overseas orders, carriage is charged at cost.

Specifications of all products are given in good faith but is subject to change without notice. Some items vary in their availability. Please ring for latest delivery situation.

Watford Electronics

JESSA HOUSE, 250, Lower High Street, WATFORD, ENGLAND
Telephone: (0923) 37774; Telex: 8956095; FAX: 01 950 8989

ORDER VIA
microlink
72-MAG030

Turbocharge your screen

displays with Chris

Nixon's compiler for

graphic-based commands

A COMPILED program runs much faster than an interpreted one but, because they are exceedingly difficult to write, Basic compilers are few and far between, and usually pretty expensive – Basic just wasn't designed to be compiled.

If this casts you into a gloom of despair, never fear – here is a program called MiniCom, which will give you a taste of what it is like to compile a Basic program.

Before continuing, I must make clear that MiniCom is not a full compiler: That would have to be in machine code and probably fill the pages of this magazine. You can still do quite a lot with it though, and it does produce 100 per cent pure machine code – not the pseudo-compiled intermediate code of some other programs.

I have subtitled it a Graphics Compiler as it provides no variables, loops, jumps or branches of any kind. Instead it allows 16 commands normally associated with producing graphics, letting you create your title screens in machine code for extra speed, compactness and versatility.

A graphic layout thus created may be called from Basic or machine code very quickly, and takes up much less room than any equivalent Basic program.

And there is more scope for producing quick designs than it may at first seem, as I have added a few extra commands to those normally available from Basic. Table I shows a full list of MiniCom key-

High-octane graphics

words complete with their syntax.

MiniCom is written in Basic and all program lines must be entered from its Command Mode, which resembles Basic's front-end.

The compiler uses the same line input as Basic, allowing full cursor editing.

Listing, loading and saving your MiniCom source files are also identical in operation to Basic, and the MiniCom commands even use identical syntax – apart from PRINT, TAB, SQUARE and FILL, which I will cover shortly.

There is no renumber command, but if

COMMAND	PURPOSE	PARAMETERS
CLG	Clear graphics window	None
CLS	Clear text window	None
CSR	Turn cursor on or off	1 or 0
COLOUR	Set text colour	Colour
DRAW	Join two graphic points	x,y
GCOL	Set graphic colour	Graphic mode, colour
GWIND	Set graphic window	x1,y1,x2,y2
MODE	Set screen mode	Mode number
MOVE	Move graphics cursor	x,y
PLOT	General purpose graphics	x,y
PRINT	Print text	String of text
SQUARE	Draw filled 4 sided shape	x1,y1,x2,y2,x3,y3,x4,y4
TAB	Move text cursor	x,y
TWIND	Set text window	x1,y1,x2,y2
VDU	General purpose output	String of VDU codes
FILL	Semi-fill area of screen	x,y

Table I: List of MiniCom keywords and their syntax

What is a compiler?

THE Basic programming language has come under a lot of flak in recent years from those who believe either it is too slow, or that it acts as an encouragement for unstructured programming.

The latter viewpoint is patently foolish – especially where BBC Basic is concerned. Its legendary speed and use of structure – partly borrowed from Pascal – is unrivalled in both the small and large computer markets.

There is some merit to the first point, however. Although it's probably the fastest version of Basic available on any home micro, BBC Basic – like any interpreted language – cannot match the speed of a compiled language such as C, Pascal and so on.

The reason for this is inherent in the meaning of the terms *interpreted* and *compiled*. An interpreted lan-

guage is designed so you can enter instructions in a form closely resembling plain English.

Each program line is broken down as soon as it is entered, and stored as a sequence of single-byte *tokens*, which represent the keywords – such as PRINT – you originally typed in full. Any parameters or text associated with a particular keyword are stored in their original form after the relevant token.

When run, the interpreter – itself a complex machine code program – begins scanning through the tokens and their parameters, translating them and carrying them out. Once a particular instruction has been executed, the interpreter passes to the next one.

Furthermore, each instruction must be re-interpreted each time the program flow loops back to it.

Interpreters are used because execution can be stopped at any stage, with the original program still

in memory, facilitating instant editing. Compilers, however, offer no such facility.

Using a compiler is a much more powerful method of programming. Like Basic, commands are entered in a form which is very close to plain English. The real difference is only apparent when it is time to run the program.

The compiler starts scanning through the text as before. But instead of being executed, a machine code translation is generated and stored as part of a growing heap of compiled code.

When compilation is finished, the resultant stack of code is a fully independent machine code program in its own right – and can be stored on disc for future use and run independently of the compiler.

As you can see, because the output of a compiler is pure machine code, it is many times faster than an equivalent interpreted program.

you find one necessary, simply save your program and load it again. This will renumber it from line 10 in steps of 10.

Type in Program I — the full listing of MiniCom. Save it as anything you like — but don't try and use it before you have saved it.

All MiniCom commands must be on separate lines, but you can forget unnecessary spaces just as in BBC Basic. To compile your finished masterpiece simply type COMPILE.

You will be asked for the address you would like the code to be assembled from — this may be anywhere in the program area ram, as MiniCom assembles using Basic 2's offset option. If you are unsure, type &1900 — the safest value to choose.

MiniCom will then begin compiling, and will show you when each of the two assembly passes BBC Basic makes is taking place. If MiniCom finds an incorrect number of parameters after any keyword, compilation will be aborted and you will be informed of the offending line's number.

When compilation is complete, MiniCom shows you the total number of bytes used. This may be more than you expect — especially if your program was a short one — because a short subroutine is always tacked on to the end of the compiled code to allow it to run independently.

If the command FILL is used, a further subroutine which does the filling will also be tacked to the end of the code. However, this is only done once. These extra subroutines are similar in function to the Basic rom, which executes all Basic commands, as it would be unfair to expect MiniCom to produce 100 per cent independent machine code without having its own mini-rom attached to the code.

But as long as your program is of a reasonable length — more than 20 lines — the space used will still be insignificant compared to that used by an equivalent Basic program.

To save your compiled code, type:

```
CSAVE'filename
```

In all loading and saving, Minicom allows you to forget the last quote if you wish. Your program may now be *RUN as a full machine code program.

All operating system star commands are allowed from MiniCom's command mode, and this makes for a little bit of fun.

An interesting experiment that I have tried is to *SPOOL an existing Basic program which already conforms to the structure required by MiniCom — no multi-statement lines and MiniCom specific commands only — and *EXEC it after entering MiniCom.

After compilation it is great fun to watch what was a true Basic program transformed into pure machine code!

COMMAND	PURPOSE	PARAMETERS
LOAD	Load MiniCom program	"filename("")
SAVE	Save MiniCom program	"filename("")
CSAVE	Save compiled machine code	"filename("")
LIST	List all or part of program	((1st),(2nd))
COMPILE	Compile program	None
HELP	List all keywords	None
NEW	Clear program from memory	None

Table II: List of MiniCom direct commands

MiniCom's special commands

MiniCom allows all text strings to be entered into PRINT commands without quotes. Indeed, if quotes are used they will appear on screen when the finished program is *RUN.

TAB must be used by itself and on a separate line from any PRINT statement. This should make sense to machine code programmers, as TAB simply places the text cursor at the position specified by the next two parameters.

The SQUARE command draws a filled four-sided polygon, taking four parameters which must be in the form: Top left, top right, bottom left and bottom right — or strange graphical effects may occur.

The CSR command allows you to turn the text cursor on or off using a parameter 1 or 0.

Finally there's FILL, which is not a true fill for the same reasons that MiniCom is not a full compiler — namely space. It will fill all regular

shapes, and even irregular ones can be catered for if used at several points in the shape.

Type in the demo — Program II — from within MiniCom, compile it and *RUN the result. You may like to try and write a Basic program which is as fast and compact.

Although the program is fully error trapped, disc users may occasionally receive the message "Can't extend" when trying to save. Simply save your program to another disc, delete the old file, compact the disc, then copy the file back on to it.

Minicom will work with any BBC Micro, cassette or disc based, with Basic 2 or later. This includes the B+, Master 128 and Master Compact. Type *BASIC followed by REPORT to ascertain which Basic you have.

Users of the standard BBC Micro will lose the use of function keys and user-defined characters while in MiniCom, but these will be unaffected by the actual *RUNning of compiled code.

```

10 REM MiniCom
20 REM Graphics Compiler
30 REM By Chris Nixon
40 REM (c) The Micro User
50 REM
60 ONERROR GOTO1200
70 MODE7:PROCSETUP
80 PROCINPUT:GOTO800
90 DEFPROCSETUP:FOR Y%=0 TO 1:PRINT TAB(3
,Y%)CHR$141CHR$129CHR$157CHR$131"MiniCom
Graphics Compiler "CHR$156:NEXT
100 PRINTTAB(12,2)CHR$133"By Chris Nix
on"TAB(8,3)"(c) The Micro User 1987"
110 PRINTTAB(0,4)STRING$(40,"");
120 VDU28,0,24,39,5:MAXCOM%=16:col=877
130 !&C00=&B00:&C02=78:&C03=32
140 ?&C04=127:MAX%=0:MAXLIN%=1000
150 DIM LS(1000),KS(MAXCOM%),parms%(20
),L%(MAXCOM%):FOR L%=1 TO MAXCOM%:READKS(L
%):NEXT:FOR L%=1 TO MAXCOM%:READL%(L%):NEX
T:base%=&6000:PROCNEW:ENDPROC
160 DEFPROCINPUT:VDUASC"J"
170 AX=0:X%=0:Y%=8C:CALL&FFF1
180 PROCINTERPRET:ENDPROC
190 DEFPROCINTERPRET
200 LS=$&B00:V%=VAL(LS):IF V%=0 PROCDI
RECT:ENDPROC
210 IF V%>MAXLIN% PRINT"Line number to
o big.":ENDPROC
220 IF LS=STR$V% LS(V%)="":ENDPROC
230 BASE%=LENSTR$V%+1
240 F%=0:FOR L%=1 TO MAXCOM%
250 PT%=INSTR(LS,KS(L%),BASE%)
260 IF PT%>0 F%=L%:T%=PT%
270 NEXT:IF F%=0 PRINT"Unknown keyword
.":ENDPROC
280 L%=T%+LEN$(F%)-1:REPEAT:L%=L%+1:U
NTIL MIDS(LS,L%,1)<>" "
290 TS=CHR$(F%+64)+" "+RIGHT$(LS,LENLS
-L%+1)
300 LS(V%)=TS:IF MAX%<V% MAX%=V%
310 ENDPROC

```

Turn to Page 117 ►

Program I

DRAM
ELECTRONICS LTD.

OFFICIAL ACORN SPARES DISTRIBUTOR

ATPL Sidewise board £35.63 + VAT
Citizen 120D Printer £165.00 + VAT
(carriage free)

Please phone for prices
Dealer Enquiries Welcome

DRAM ELECTRONICS LTD.

Unit 12, Kingston Mill, Chestergate,
Stockport SK3 0AL.

Tel: 061-429 0626. Tlx: 312242

STACK COMPUTER PRODUCTS

**LIGHTPEN
+ DRAW SOFTWARE
+ 10 GAMES**



**SPECIAL
OFFER PRICE**

£18

- VERY ACCURATE
- TAPE & DISK
- B, B+, 128 MASTER
- ALL MODES

- EAST TO USE
- SPECIAL TOUCH SWITCH
- FULL YEARS WARRANTY (SPECIFY 40/80T DISK)

**DIGIMOUSE & GRAFIK
B, B+, MASTER etc.**



£34.95

- 100% AMX COMPATIBLE
- LINEAR LOCK FEATURE
- FREE SOFTWARE (40T DISK)
- BRITISH QUALITY PRODUCT
- COMPACT VERSION AVAILABLE

**ANAMOUSE & MOUSEPAINT
BBCB, ELECTRON +1.**



£29

- ANALOGUE MECHANISM
- COLOUR SOFTWARE (TAPE)
- PRINTER DUMP
- THUMBWHEEL
- FULL YEAR WARRANTY

FREE 40 PAGE CATALOGUE
ON REQUEST PRICES
INCLUDE VAT P & P £1.90
(FREE OVER £20)

MEEDMORE LIMITED
28 Farriers Way, Netherton
Merseyside L30 4XL
Tel: 051-521 2202



DATATHORN
SYSTEMS
Ltd

George House,
50 Spring Grove,
Loughton,
Essex IG10 4QD

Tel: 01-508 4904

EPSON LASER SPECIALISTS

We offer the following outstanding value Epson GQ-3500 Laser printer package with a full technical help and programming back-up service:

- *EPSON GQ-3500 LASER PAGE PRINTER
- *LASERJET+ EMULATION CARD
- *PARALLEL CABLE
- *FORMS1 - forms design software
- *COMMAND SUMMARY SHEET
- *DOWNLOAD 12 cpi FONT (to help FX users!)
- *DELIVERY TO YOUR DOOR£1498.80
- (package value£1953.00)

Send sae (26p stamp) for our FREE FACT PACK!


EXTRAS:

- * 24hr Maintenance Service£ 95.00
- * Special discounts on Acorn Archimedes with GQ-3500
- * Discounts for customers on accessories, software and consumables
- * Download fonts (BBC/PC) - send SAE for catalogue [Please add VAT to prices. This advertisement is printed in one of our download fonts and copied direct]

COMPUTER REPAIRS (UK)

2 Austins Place, Hemel Hempstead,
Herts. HP2 5HN Tel: (0442) 217624

Too many function strips, wondering where to put them?
Then maybe you will be interested in our purpose built function strip holder.

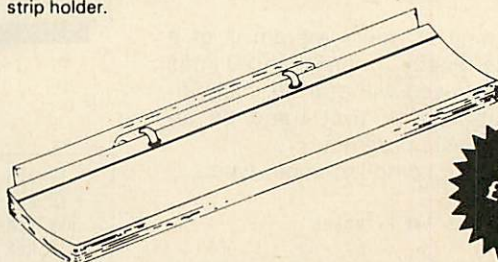

**only
£5.50**

Each holder comes with 10 clear plastic sleeves. Easily fitted to the BBC or BBC - Master series.

To compliment this little add-on, we have commissioned a function strip design programme, compatible with Epson dot matrix printers (works in condensed mode), and can also supply blank function strip cards.

- Flip over function strip holder £5.50
- Extra sleeves for above £0.40
- Blank function strip cards £0.25

10 for £1.25

- Function strip design software £4.50

Please add 15% VAT to all prices

14 day money back guarantee if not satisfied

Available only from Computer Repairs (UK) Please make cheques or postal orders payable to: -Computer Repairs (UK), to the above address.

*State whether disc or cassette

Please allow 28 days for delivery.

P.S. We repair all makes of Micro, got something faulty, why not give us a ring.

Trade enquiries welcome

◀ From Page 115

```

320 DEFPROC DIRECT
330 PT%=INSTR(L$, "LIST"): IF PT%>0 PROC
LIST:ENDPROC
340 IF INSTR(L$, "NEW")>0 PROCNEW:ENDPR
OC
350 IF INSTR(L$, "COMPILE")>0 PROCCOMPI
LE:ENDPROC
360 IF INSTR(L$, "HELP")>0 PRINT:FORL%=
170 MAXCOM%:PRINTTAB(6);KS(L%):NEXT:ENDP
ROC

```



10 = 00	530 = 830B 3	1050 = 2FFA 9
20 = 00	540 = A7EC C	1060 = 6929 9
30 = 00	550 = 3E04 B	1070 = 9F59 8
40 = 00	560 = DF09 B	1080 = B094 4
50 = 00	570 = E531 A	1090 = E929 5
60 = F14A A	580 = FD0D E	1100 = 6173 9
70 = 725F 9	590 = AC66 4	1110 = D1FC E
80 = 2B06 F	600 = 2BC 3	1120 = BF5C 5
90 = 8B93 2	610 = EEE9 C	1130 = A01F E
100 = 2D03 3	620 = D014 9	1140 = E2FA 9
110 = 9506 F	630 = BE17 0	1150 = EFDD E
120 = 78F4 D	640 = 9E30 F	1160 = C53A 6
130 = EEFA 3	650 = D987 6	1170 = A2A1 0
140 = 34D9 B	660 = 51FE 8	1180 = E8C2 9
150 = A32A 3	670 = 1099 6	1190 = 79E7 D
160 = BF57 7	680 = D373 B	1200 = CA78 1
170 = BC9 F	690 = BFC8 E	1210 = DCC5 5
180 = 8F76 8	700 = 21CC F	1220 = 9AF2 4
190 = 5D15 5	710 = 3CC2 F	1230 = D044 B
200 = 7FB7 8	720 = FF1D D	1240 = 5FC0 4
210 = 1B9C A	730 = 7C6D 5	1250 = 26B5 4
220 = DC42 3	740 = A124 E	1260 = 7FB2 6
230 = F6B 7	750 = 6343 9	1270 = 3311 4
240 = 692F 5	760 = 3DA0 B	1280 = DA33 B
250 = 1BDA A	770 = 9F7C B	1290 = AD89 9
260 = FCC1 8	780 = E18F 6	1300 = 3F11 3
270 = AE46 4	790 = 3B7C 1	1310 = 49D0 7
280 = B509 0	800 = 1660 B	1320 = FFC3 6
290 = 7C06 8	810 = 9218 7	1330 = 346A 3
300 = 5751 C	820 = 852 7	1340 = 372 3
310 = ED0F 3	830 = 636C 5	1350 = 4A61 B
320 = D6BF 0	840 = 81E9 C	1360 = CDC7 2
330 = A1D1 5	850 = 587E 3	1370 = 4379 0
340 = F5B1 0	860 = 3617 D	1380 = 79B3 E
350 = 706B C	870 = C79D 9	1390 = DC83 A
360 = 3AE9 1	880 = 8B58 4	1400 = F146 D
370 = 165B 4	890 = 80DF 2	1410 = C79D E
380 = 9E67 2	900 = 90CE 2	1420 = 55AF 6
390 = A0EE A	910 = 869B 9	1430 = 7C7F 7
400 = 4D86 8	920 = 7BB6 2	1440 = 9CEA 5
410 = 68DF C	930 = E21D 1	1450 = 4C86 E
420 = 722D 5	940 = 9990 1	1460 = 23DE 1
430 = 1537 C	950 = 108D 7	1470 = 36DD D
440 = 686F C	960 = 647E D	1480 = 66EF 9
450 = DF19 9	970 = 1F34 3	1490 = 92D5 9
460 = 26C 5	980 = D201 6	1500 = C020 E
470 = 2B0A 1	990 = CDFB 5	1510 = DB2C B
480 = C3DB 7	1000 = ED0F D	1520 = 693D 3
490 = 59F1 1	1010 = D6C3 A	1530 = F15B E
500 = ED0F C	1020 = 4D71 8	1540 = 5FA9 E
510 = 10EC B	1030 = 7E7E 0	1550 = 8A45 0
520 = BC0A 9	1040 = 7841 D	1560 = 1BCE 6

```

370 IF INSTR(L$, "LOAD")>0 PROCLOAD:END
PROC
380 IF LEFTS(L$, 4) = "SAVE" PROCSAVE:END
PROC
390 IF INSTR(L$, "CSAVE")>0 PROCCSAVE:E
NDPROC
400 IF LEFTS(L$, 1) = "*" L$:ENDPROC
410 IFL$="" ENDPROC ELSE PRINT"Unknown
command.":ENDPROC
420 DEFPROCLIST
430 IF RIGHTS(L$, 4) = "LIST" PROCLIST1(0
, MAX%):ENDPROC
440 BASE% = PT% + 4: PT% = INSTR(L$, ", ", BASE%
)
450 IF PT% = 0 PROCLIST1(VALRIGHTS(L$, LE
NLS-BASE%+1), VALRIGHTS(L$, LENLS-BASE%+1
):ENDPROC
460 S% = VAL(RIGHTS(L$, LENLS-BASE%+1))
470 BASE% = PT% + 1
480 E% = VAL(RIGHTS(L$, LENLS-BASE%+1))
490 IF E% = 0 PROCLIST1(S%, MAX%):ENDPROC
ELSE PROCLIST1(S%, E%)
500 ENDPROC
510 DEFPROCLIST1(S%, E%)
520 IF MAX% = 0 ENDPROC
530 IF S% > MAX% OR S% < 0 OR E% < S% OR E% >
MAX% PRINT"Can't LIST that.":ENDPROC
540 PRINT:FORL% = S% TO E%
550 L$ = L$(L%): IF L$ = "" THEN 570
560 PRINTTAB(5-LENSTR$L%);STR$L%"; ";K
$(ASC(LEFTS(L$, 1))-64);RIGHTS(L$, LENLS-1
)
570 NEXT:ENDPROC
580 DEFPROCNEW:MAX% = 0:0% = base%:FORL% = 0
TOMAXLIN%:L$(L%) = "":NEXT:ENDPROC
590 DATA CLG,CLS,CSR,COLOUR,DRAW,GCOL,
GWIND,MODE,MOVE,PLOT,PRINT,SQUARE,TAB,TW
IND,VDU,FILL
600 DATA 0,0,0,0,1,1,3,0,1,2,0,7,1,3,0
,1
610 DEFPROCLOAD:PROCFL: IF PT% = 0 ENDPRO
C
620 PROCNEW:CH% = (FS%): IF CH% = 0 PRINT"No
such file.":ENDPROC
630 L% = 10: REPEAT: INPUT#CH%, L$(L%): L% = L
% + 10
640 UNTIL EOF#CH%: CLOSE#CH%
650 MAX% = L%:ENDPROC
660 DEFPROCFL: PT% = INSTR(L$, "*****"): IF PT
% = 0 PRINT"Missing *****":ENDPROC ELSEFS=R
IGHTS(L$, LENLS-PT%): IF RIGHTS(FS%, 1) = "*****
FS% = LEFTS(FS%, LENFS-1):ENDPROC ELSE ENDP
ROC
670 DEFPROCSAVE:PROCFL: IF PT% = 0 ENDPRO
C
680 CH% = OPENOUT(FS%): FORL% = 0 TO MAX%
690 IF L$(L%) <> "" PRINT#CH%, L$(L%)
700 NEXT: CLOSE#CH%:ENDPROC
710 DEFPROCCSAVE:PROCFL: IF PT% = 0 ENDP
ROC
720 IF 0% = base% PRINT"No compiled code
.":ENDPROC
730 FS% = RIGHTS(L$, LENLS-PT%): IF RIGHTS(
FS%, 1) = "***** FS% = LEFTS(FS%, LENFS-1)
740 "SAVE "+FS%+" "+STR$ "base%+" "+STR$
"0%+" "+STR$ "EX%+" "+STR$ "EX%":ENDPROC
750 DEFPROCCOMPILE: IF MAX% = 0 PRINT"No
program.":ENDPROC
760 REPEAT:PRINT"Execution address?"CH
RS131"8":X% = 0:Y% = 8C:A% = 0:CALL&FFF1:EXS=
"8"&$B00:UNTILEVAL EXS>0:EX% = EVALEX$
770 PRINT"Compiling...":fill% = 0:FORP
ASS=4T06STEP2:P% = EX%:0% = base%: IF PASS=4
PRINTTAB(5)CHR$134"1st pass": ELSE PRINT
TAB(5)CHR$134"2nd pass";

```

```

780 FOR LIN% = 0 TO MAX%:PROCcompile
790 NEXT:COPT PASS:RTS
800 .vdu
810 PLA:STA &70:PLA:STA &71
820 LDY #1:LDA (&70),Y:TAX
830 .vduloop
840 INY:LDA (&70),Y:JSR &FFEE
850 DEX:BPL vduLoop:INY:TYA:CLC
860 ADC &70:STA &70
870 LDA &71:ADC #0:STA &71:JMP (&70)
880 ]
890 IF fill% = 1 PROCFILL
900 NEXT:L% = 0-base%:PRINT"Code is "
;L%"; (&";L%";) bytes long":ENDPROC
910 DEFPROCGETPARAMS:c% = 0
920 BASE% = 2:ptr% = 0:REPEAT
930 TS = RIGHTS(L$, LENLS-BASE%):V% = VALTS
940 parms%(ptr%) = V% MOD 256:parms%(ptr
%+1) = V% DIV 256:ptr% = ptr% + 2
950 BASE% = BASE% + LENSTR$V%
960 PT% = INSTR(L$, ", ", BASE%)
970 IF PT% > 0 BASE% = PT%: c% = c% + 1
980 UNTIL BASE% > LENLS OR PT% = 0
990 IF K% <> 11 AND K% <> 15 AND c% <> L%(K%
) PRINT"Bad parameters in line ";LIN%:
GOTO80
1000 ENDPROC
1010 [OPT PASS:LDA #16:JSR &FFEE:]:ENDP
ROC
1020 [OPT PASS:LDA #12:JSR &FFEE:]:ENDP
ROC
1030 [OPT PASS:JSR vdu:EQUB10:EQUB23:EQU
UB1:EQUBparms%(0):EQUB0:EQUB0:]:ENDPROC
1040 [OPT PASS:JSR vdu:EQUB1:EQUB17:EQU
Bparms%(0):]:ENDPROC
1050 [OPT PASS:JSR vdu:EQUB5:EQUB25:EQU
B5:]:FORL% = 0T03:[OPT PASS:EQUBparms%(L%
):]:NEXT:ENDPROC
1060 [OPT PASS:JSR vdu:EQUB2:EQUB18:EQU
Bparms%(0):EQUBparms%(2):]:ENDPROC
1070 [OPT PASS:JSR vdu:EQUB8:EQUB24:]:F
ORL% = 0T07:[OPT PASS:EQUBparms%(L%):]:NEX
T:ENDPROC
1080 [OPT PASS:JSR vdu:EQUB1:EQUB22:EQU
Bparms%(0):]:ENDPROC
1090 [OPT PASS:JSR vdu:EQUB5:EQUB25:EQU
B4:]:FORL% = 0T03:[OPT PASS:EQUBparms%(L%
):]:NEXT:ENDPROC
1100 [OPT PASS:JSR vdu:EQUB5:EQUB25:]:F
ORL% = 0T04:[OPT PASS:EQUBparms%(L%):]:NEX
T:ENDPROC
1110 B% = LENLS-1:[OPT PASS:JSR vdu:EQU
B%:]:FORL% = 3 TO LENLS:B% = MIDS(L$, L%, 1):[
OPT PASS:EQU B%:]:NEXT:[OPT PASS:EQUB13
:EQUB10:]:ENDPROC
1120 [OPT PASS:JSR vdu:EQUB23:]:FORX% = 0
T012 STEP4:[OPT PASS:EQUB25:]:IF X% = 0 [O
PT PASS:EQUB4:] ELSEIF X% = 4 [OPT PASS:EQU
UB5:] ELSE [OPT PASS:EQUB85:]:
1130 FORL% = 0T03:[OPT PASS:EQUBparms%(X%
+L%):]:NEXT:NEXT:ENDPROC
1140 [OPT PASS:JSR vdu:EQUB2:EQUB31:EQU
Bparms%(0):EQUBparms%(2):]:ENDPROC
1150 [OPT PASS:JSR vdu:EQUB4:EQUB28:]:F
ORL% = 0T06 STEP2:[OPT PASS:EQUBparms%(L%
):]:NEXT:ENDPROC
1160 [OPT PASS:JSR vdu:EQUBc%:]:FORL% = 0
T0c%*2 STEP2:[OPT PASS:EQUBparms%(L%):]:
NEXT:ENDPROC
1170 [OPT PASS:JSR fill%:]:FORL% = 0T03:[O
PT PASS:EQUBparms%(L%):]:NEXT:fill% = 1:EN
DPROC
1180 DEFPROCcompile: IF L$(LIN%) = "" ENDP

```

Turn to Page 118 ▶

UTILITY

◀ From Page 117

```

ROC
1190 LS=LS(LIN%):K%=ASC(LEFT$(LS,1))-64
:PROCGETPARAMS:ON K% GOTO1010,1020,1030,
1040,1050,1060,1070,1080,1090,1100,1110,
1120,1140,1150,1160,1170
1200 CLOSE#0:IF ERR=17 PRINT"Break":GO
T080
1210 REPORT:PRINT:GOTO80
1220 DEFPROC FILL
1230 OPT PASS
1240 .fill
1250 PLA:STA &70:PLA:STA &71:JSR copy
1260 JSR point:STA col:JSR line
1270 .loop1
1280 CLC:LDA &74:ADC #4:STA &74
1290 LDA &75:ADC #0:STA &75:JSR point
1300 CMP col:BNE down:JSR line
1310 JMP loop1
1320 .down
1330 JSR copy
1340 .loop2
1350 SEC:LDA &74:SBC #4:STA &74
1360 LDA &75:SBC #0:STA &75:JSR point
1370 CMP col:BNE exit:JSR line
1380 JMP loop2
1390 .exit
1400 CLC:LDA &70:ADC #5:STA &70
1410 LDA &71:ADC #0:STA &71:JMP (&70)
1420 .copy

```

```

1430 LDX #3:LDY #4
1440 .copyloop
1450 LDA (&70),Y:STA &72,X:DEY:DEX
1460 BPL copyloop:RTS
1470 .point
1480 LDA #9:LDX #&72:LDY #0:JSR &FFF1
1490 LDA &76:RTS

```

```

1500 .line
1510 LDA #25:JSR &FFEE:LDA #77
1520 JSR &FFEE:LDX #0:LDY #3
1530 .lineLoop
1540 LDA &72,X:JSR &FFEE:INX:DEY
1550 BPL lineLoop:RTS
1560 J:ENDPROC

```

```

10 MODE 2
20 GCOL 0,6
30 SQUARE 370,920,930,920,370,330,930
,330
40 GCOL 0,0
50 SQUARE 400,900,900,900,400,350,900
,350
60 GCOL 0,2
70 MOVE 490,600
80 DRAW 790,600
90 DRAW 770,730
100 DRAW 720,810
110 DRAW 640,850
120 DRAW 560,810
130 DRAW 510,730
140 DRAW 490,600
150 MOVE 490,580
160 DRAW 790,580
170 DRAW 770,530

```


```

180 DRAW 710,480
190 DRAW 640,470
200 DRAW 570,480
210 DRAW 510,530
220 DRAW 490,580
230 MOVE 640,470
240 DRAW 655,440
250 MOVE 490,475
260 DRAW 800,405
270 FILL 640,500
280 FILL 640,700
290 COLOUR 129
300 COLOUR 3
310 TAB 6,25
320 PRINT Mini-Com
330 COLOUR 128
340 COLOUR 5
350 TAB 2,28
360 PRINT Graphics Compiler

```

Program II

IMAGE PROCESSING



For IBM PC & BBC Micro

IMAGE III - FRAME STORE

- * Real time picture capture from camera or video tape recorder.
- * Max resolution 512 x 512 x 64 Grey levels.
- * 3 Resolution options.
- * Storage of multiple pictures.
- * Economical price £1495.00 + VAT

RAMASES IMAGE PROCESSING SOFTWARE

- * Menu Driven.
- * Contrast Stretching * Picture Subtraction.
- * Linear and area measurement.
- * Image enhancement * Edge detection.
- * Image storage and retrieval from disk.
- * BBC Software
- * Economical price £250.00 + VAT
- * IBM PC Software
- * Economical price £590.00 + VAT

For full specification consult the
IMAGE PROCESSING SPECIALIST

ELTIME VISION SYSTEMS

10/14 Hall Road, Heybridge, Maldon, Essex CM9 7LA
Telephone: 0621-59500. Telex: 995548

INTERFACING ?

We have Interfaces available ex-stock for many purposes including Stepper Motors, Lamps, Relays and small DC motors. From the User Port, you can control two stepper motors and a relay, or up to 9 relays can be added to control mains devices. Full user information included with each.

VERSION 1. Powered from BBC auxiliary power supply, £ 23.00 inc. P & P.
VERSION 2. With mains Power supply (optically isolated) £ 49.00 inc. P & P.
VERSION 3. High output for stepper motors or other, £ 42.50 inc. P & P.

Up to 3 Amps per line. Needs a separate power supply which we can supply (See below).
POWER SUPPLIES available for many voltages and currents. Write or 'phone for quote.

STEPPER MOTOR CONTROLLER

Our S.M.C. is now widely used for DIY plotters, turtles and computer control (CNC) of small machine tools. It allows you to control two stepper motors and a relay direct from BASIC by adding 20 easy-to-use 'star' commands. Save the machine code writing time for your project.

ROM with easy fitting instructions £ 14.95 incl. P & P.

SCRAPBOOK

A free-format storage & retrieval system for all types of information including colour and graphics. Incorporates screen designers and facilities to search, sort, browse, print, extract etc. Forget fields, records etc. Store information as you want to read it - on the screen. Store up to 320 Teletext screens on a disc. Do automatic 'slide show' type presentations.

Disc. (40 or 80 Track) and manual £ 12.95 incl. P & P.

Instant On-Screen Help

All BBC models can have On-Screen help with our range of ROMs and Discs. Why thumb the handbook when you can have the important details on screen even when wordprocessing.

WORDWISE COMPANION

For Computer Concepts Wordwise and Wordwise Plus wordprocessors.

BASIC COMPANION

Instant help for getting to grips with BASIC programming.

PROGRAMMERS COMPANION

Colours, Graphics, Sounds, VDU codes, ASCII codes, *FX commands etc.

MACHINE CODE COMPANION

Assembly language help. OS routines, 6502 Instructions, Addressing Modes, Vectors etc.

All the above ROMs come with easy to follow fitting instructions £ 19.95 incl. P & P.

All of the above ROMs are also available as ROM IMAGES on disc for loading into sideways RAM. Any of the above ROMs £ 8.95 All FOUR Companions £ 19.95 incl. P & P.

Disc Versions

Disc versions of Basic, Programmers and Machine code Companions. £ 9.95 incl. P & P.
All three Disc Companions on one disc. 40 or 80 Track £ 19.95 incl. P & P.

Demonstration Disc

With interactive demonstration and samples from all four Companions. £ 1.25 inc. P & P.



Telephone (0492) 76925 For Details.

MICRO HELP



Hafod-y-Mor, Hill Terrace, LLANDUDNO, LL30 2LS.

Mike Cook presents

a hi-tech version of

a traditional toy

SERIES

B

B+

M

central

A

Etch-a-sketch comes up to date

ONE skill that is thrust upon you as a parent is that of emergency repair man. When bright eyes hand you a tangled mess of plastic and a voice says, "Daddy mend" you just have to try somehow.

However, when the much-loved Etch-a-sketch went the way of all toys there was not a lot I could do – the insides are coated with a fine metallic powder that definitely would not go well with the decor. So I rashly promised to make another, but this time on the BBC Micro.

Whether it was the simplicity of the project or the constant mithering I don't know, but it was completed in record time. I thought it might make an interesting project for those of you who are beginners at computer interfacing.

The toy has two controls: One that draws horizontally and the other vertically. A potentiometer, or pot for short, provides the two electrical controls we need and to read them we simply connect them up to the analogue input port.

A pot is a potential divider – a resistive element with a tap point in the middle – and as we turn the knob we can move the tap point (or wiper) from one end to the other. If we have a fixed voltage across the pot, the voltage (or potential) at the wiper can be varied from nothing to full.

Now, the analogue to digital converter

THE BEEB BODY BUILDING COURSE

accepts a voltage between zero and a reference one. Fortunately we can get access to this reference through the 15-way D-type connector.

Therefore if we want to control the readings from the converter over the full range we need to connect the fixed ends of the pot to zero volts (or earth) and the V ref output. Then we need to connect the wiper to the voltage input: This is shown in Figure I.

Connections to the 15-way connector are quite easy as the numbers are marked on the back of the plug – you

can see them with the help of any domestic electron microscope! However, in order to help you, the circuit is shown in Figure II as a practical diagram.

The values of the pots are not critical and anything between 5K and 1M could be used. Make sure, however, that they are linear and not log. If you use the latter you will find all the control is at one end of the travel. Note that this is the same principle used for analogue joysticks.

If you haven't got the parts in your junk box they can be obtained as Body Build pack No. 47, using the order form accompanying this article.

Well, that's the construction of the hardware over in double quick time, so now we have to look at what is needed for the software. This turns out to be equally simple as you can see if you look at Program I.

In fact it could have been even simpler without the subtle improvements such as line 40, which ensures that only two analogue input channels are working to speed up the response of the circuit and

Turn to Page 121 ►

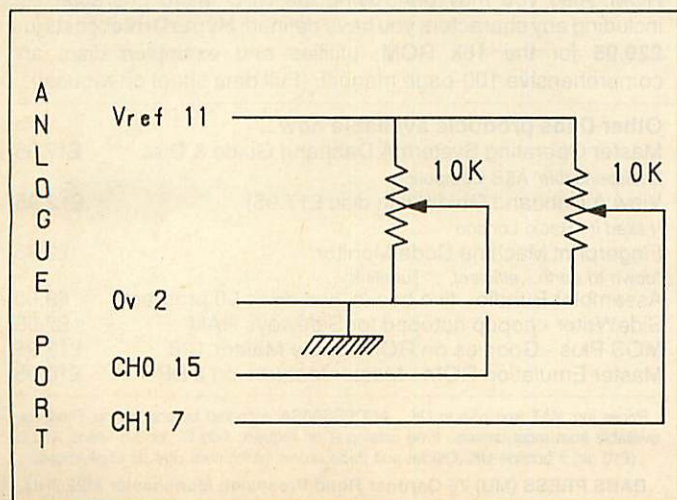


Figure I: The connections for the pot

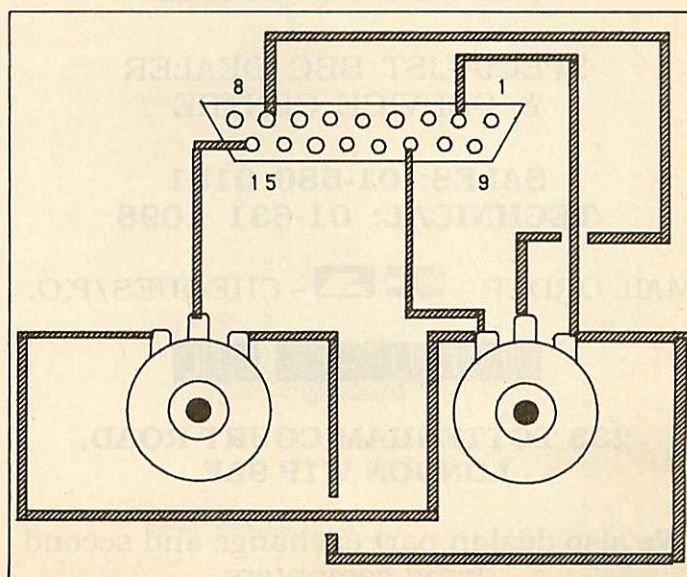


Figure II: Practical diagram of the circuit



Snapper King Harold retires

Harold has had enough! He can't get past 3500 at Snapper and the strain is telling. You wouldn't know from the photo that he's only 32 would you? If you call to look at our full range of BBC software and hardware, disc drives, monitors, printers, cables etc. Harold will shuffle about doing his best to help. Just don't ask for a demonstration of Snapper!

Number One in Bromley

Data Store

6 Chatterton Road, Bromley, Kent O1 460 8991

WITH
PAYROLL

A LOW COST DISC BASED PROFESSIONAL ACCOUNTING PROGRAM

For the BBC Computer

"Micro-Trader"

INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. "Micro-Trader" offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of up to 1,000 accounts and 5,000 transactions per month.

Nominal Ledger features quick and easy entry of everyday transactions. Up to 6 Bank Accounts, full V.A.T. facilities, Journal Posting, Full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

"MICRO-STOCK"

Stock Control program, fully integrated with "Micro-Trader". 4,000 Stock Items with user defined Codes. Invoice and Credit Notes and Cash Sales routine. Full Stock Held Reports.

£75.00 + V.A.T.

"EXTENDED PAYROLL"
Micro-Aid Full Feature Extended Payroll. For use stand alone or integrated with "Micro-Trader".

£49.95 + V.A.T.

Compact
BRITISH BROADCASTING CORPORATION
MASTER SERIES MICROCOMPUTER

ONLY
£200
+ V.A.T.

"MICRO-MAILER"

A Mailmerge program, fully integrated with "Micro-Trader". With a user Database.

£30.00 + V.A.T.

Archimedes

PHONE TODAY FOR A FREE FACT SHEET

MEADOW COMPUTERS

11, LONDON STREET, WHITCHURCH, HAMPSHIRE, RG28 7LH

Telephone: Whitchurch (0256) 892008

It is not what we tell you before - it is what we do for you later that counts

LARGEST SELECTION OF BBC MODEL BD, COMPACT, MASTER, ELECTRON HARDWARE AND SOFTWARE

SPECIALIST BBC DEALER
& SERVICE CENTRE

SALES: 01-580 0181
TECHNICAL: 01-631 1098

MAIL ORDER -   - CHEQUES/P.O.

COMPUFACE LTD

at Video City

233 TOTTENHAM COURT ROAD,
LONDON W1P 9AE

We also deal in part exchange and second hand computers

DABS PRESS HYPERDRIVER: Printer Power

HyperDriver is an amazing new companion ROM for all Epson-compatible printers, unleashing all their capability, without resort to complex programming and arcane lists of numbers. Over eighty (yes 80!) star commands provide all printer functions. As well as all the standard FX80 commands, your own macros may be built. For example, one customer uses these for colour codes on his Integrexprinter. For VIEW, a special printer driver is provided in the ROM, which provides a unique and invaluable on-screen preview facility, which is available from BASIC as well, and yes, microspacing is at last supported! If you haven't got an NLQ font, don't worry, a beautiful proportional NLQ typeface is built into the ROM. Also you may print using the BBC Micro character set, including any characters you have defined. **HyperDriver** costs just £29.95 for the 16k ROM, utilities and examples disc, and comprehensive 100-page manual. (Full data sheet on request).

Other Dabs products available now...

Master Operating System: A Dabhand Guide & Disc	£17.95
"indispensable" A&B Computing	
View: A Dabhand Guide (with disc £17.95)	£12.95
"I liked it" Radio London	
Fingerprint Machine Code Monitor	£9.95
"down-to-earth... efficient..." Tubelink	
Assembler Bundle - two books, two discs 90 programs	£9.95
SideWriter - popup notepad for Sideways RAM	£7.95
MOS Plus - Goodies on ROM for the Master 128	£12.95
Master Emulation ROM - Master features on a BBC	£19.95


Prices inc. VAT and p&p in UK. ACCESS/VISA accepted by post/phone. Products available from most dealers. Free catalogue on request. Add £2 for 3.5" discs. Add £2 (£10 air) if outside UK. Official and trade orders welcomed. See us at all shows.

DABS PRESS (MU) 76 Gardner Road Prestwich Manchester M25 7HU
Tel: 061-773 2413 • Prestel 942876210 • Microlink 72:MAG11596

◀ From Page 119

line 50 that turns the cursor off.

The program will work in any mode, but mode 0 gives the best resolution. The main loop simply reads the two input channels and scales them to get rid of

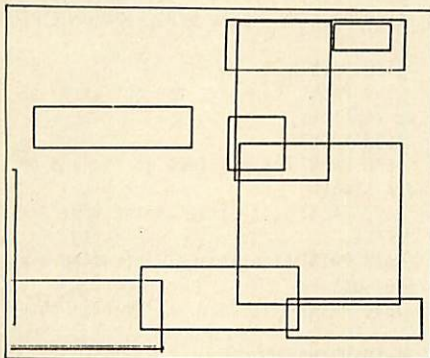

the meaningless bits on the end of the conversion figure. Then the values read are used to draw a line from the previous point.

Line 100 is a simple delay and ensures that next time round the loop both input channels will have completed a conversion.

Finally, line 110 looks to see if the spacebar is being pressed: If it is, the screen is wiped clean. Couldn't be simpler could it? If the line drawn is jagged you probably have a dirty pot so simply squirt the track with some switch cleaner.

But with more software we could do

even more. Program II shows a draughting package based on the same hardware. This allows you to draw diagonal lines, triangles, rectangles and even circles using the controls. Lines are rubber banded so they may be positioned anywhere on screen, the colour can be changed, and your creations may even be saved on disc.

When typing it in, line 80 should be omitted until you have entered the complete program correctly as this restricts the text display to a single line at the top of the screen – any error message will scroll off before you can read it.

The program is quite simple to operate: Select a mode such as line and you will see a dot you can move with the controls. When it is in the correct position hit a key and that will fix one end.

Now you can rubber-band it until it is in the correct position and you then have a choice: Pressing the spacebar will fix the line and allow you to move and draw another, or pressing Return will draw the line and allow you to enter another shape mode. Finally, pressing J will join the end of that line to another.

Note that when you select a polygon you are asked for the number of sides and if you choose a large number (like 20) the result will be almost as good as a circle.

And there you have it – a neat micro-based Etch-a-sketch. It's quite surprising what you can do with a simple piece of hardware, isn't it?

BEEB BODY BUILDING PACK ORDER FORM

Body Build Packs

■ 57 Two high quality 10K pots, a 15-way D-Type plug and cover, a plastic box, two knobs and a length of 4 core cable **£9.99**

Name:

Address:

Post code:

All prices include VAT and P&P.

Educational establishment orders accepted.

**Make cheques payable to
Musbury Consultants and send to:
8 Fairhill, Helmshore,
Rossendale, Lancs.
BB4 4JX**

Foreign orders add £3.00 if airmail delivery is required.

Program I

```
10 REM Sketch
20 REM By Mike Cook
30 MODE 0
40 *FX16,2
50 VDU 23;8202;0;0;0;0:
60 REPEAT
70 X%=ADVAL(1) DIV 64
80 Y%=ADVAL(2) DIV 64
90 DRAW X%,Y%
100 *FX19
110 IF INKEY(-99) THEN CLS
120 UNTIL FALSE
```

Program II

```
10 REM DRAUGHTSMAN - Mike Cook
20 DIM CLI% 27
30 MX=1:C%=3:MODE MX
40 *FX16,2
50 TRIANGLE=FALSE:CLS
60 BLUE_IN_THE_FACE=FALSE
70 PROC_INSTRUCTIONS
80 VDU 28,0,0,39,0
90 VDU 19,2,2,0,0,0
100 GCOL 3,C%:X%=-1:Y%=-1
110 REPEAT
120 AS=GET$
130 IF AS="W" THEN CLG
140 IF AS="S" THEN PROC_FILE
150 IF AS="G" THEN PROC_GET
160 IF AS="P" THEN PROC_POLY
170 IF AS="R" THEN PROC_REC
180 IF AS="C" THEN PROC_COLCHANGE
190 IF AS="L" THEN PRINT"LINE";:PROC_L
INE
200 IF AS="T" THEN PROC_TRIANGLE
210 IF AS"<>" THEN PRINT
220 UNTIL BLUE_IN_THE_FACE
230 DEF PROC_FILE
240 PRINT
250 INPUT"FILE NAME FOR SAVED SCREEN",
FS
```

```
260 IF LEN(FS) < 1 THEN ENDPROC
270 $CLI%="SAVE P."+FS+" 3000 8000"
280 X%=CLI% MOD 256:Y%=CLI% DIV 256
290 CALL &FFF7
300 X%=-1:Y%=-1
310 ENDPROC
320 DEF PROC_GET
330 PRINT
340 INPUT"FILE NAME OF SCREEN",FS
350 IF LEN(FS) < 1 THEN ENDPROC
360 $CLI%="LOAD P."+FS
370 X%= CLI% MOD 256:Y%=CLI% DIV 256
380 CALL &FFF7
390 X%=-1:Y%=-1
400 ENDPROC
410 DEF PROC_COLCHANGE
420 C%=(C%+1) AND 3
430 IF C%=0 THEN C%=C%+1
440 COLOUR C%:GCOL 3,C%
450 PRINT"NEW COLOUR ";
460 ENDPROC
470 DEF PROC_BAND1
480 REPEAT
490 PROC_FOLLOW:AS=INKEY$(0)
500 UNTIL AS"<>"
510 OX%=X%:OY%=Y%:XT%=X%:YT%=Y%
520 ENDPROC
530 DEF PROC_BAND2
```



10 = 00	50 = FF7A D	90 = 51DC 1
20 = 00	60 = BFBA 4	100 = 61AE D
30 = 6075 5	70 = 4406 A	110 = 69B 0
40 = 1594 3	80 = 9FF1 F	120 = 226C 1

Turn to Page 122 ▶

◀ From Page 121

```

540 REPEAT
550 PROC_FOLLOW
560 MOVE OX%,OY%:PLOT 13,XT%,YT%
570 MOVE OX%,OY%:PLOT 13,X%,Y%
580 XT%=X%:YT%=Y%:AS=INKEYS(0)
590 UNTIL AS<>"
600 MOVE OX%,OY%:PLOT 13,X%,Y%
610 ENDPROC
620 DEF PROC_LINE
630 REPEAT
640 IF AS<>"J" THEN PROC_BAND1
650 PROC_BAND2
660 GCOL 0,C%:MOVE OX%,OY%:DRAW X%,Y%
670 GCOL 3,C%
680 T1X%=OX%:T1Y%=OY%:OX%=X%:OY%=Y%
690 UNTIL AS=CHR$(13) OR TRIANGLE=TRUE
700 ENDPROC
710 DEF PROC_TRIANGLE
720 PRINT"TRIANGLE";
730 REPEAT
740 TRIANGLE=TRUE:PROC_LINE
750 TRIANGLE=FALSE
760 REPEAT
770 T2X%=X%:T2Y%=Y%
780 PROC_TRIBAND(X%,Y%)
790 REPEAT
800 PROC_FOLLOW:PROC_TRIBAND(OX%,OY%)
810 OX%=X%:OY%=Y%
820 PROC_TRIBAND(X%,Y%):AS=INKEYS(0)
830 UNTIL AS<>"
840 PROC_TRIBAND(X%,Y%):GCOL 0,C%
850 PROC_TRIBAND(X%,Y%):GCOL 3,C%
860 IF AS<>CHR$(13) THEN PLOT 69,X%,Y%
870 T1X%=T2X%:T1Y%=T2Y%
880 UNTIL AS<>"J"

```

```

1170 PLOT 13,OX%,YT%:PLOT 13,XT%,YT%
1180 ENDPROC
1190 DEF PROC_POLY
1200 INPUT"POLYGON NUMBER OF SIDES",N%
1210 PRINT N%:" SIDED POLYGON";
1220 REPEAT
1230 PROC_BAND1
1240 REPEAT
1250 PROC_BAND2
1260 PROC_DPOLY(X%,Y%,OX%,OY%,N%)
1270 IF AS="J" THEN MOVE OX%,OY%:PLOT 1
3,X%,Y%
1280 UNTIL AS<>"J"
1290 UNTIL AS=CHR$(13)
1300 ENDPROC
1310 DEF PROC_DPOLY(X,Y,XT%,YT%,N%)
1320 LOCAL C1,S1,P,R,A%,X1,Y1
1330 GCOL 0,C%:P=2*PI/N%
1340 N%=N%+1:C1=COS(P)
1350 S1=SIN(P):MOVE X,Y
1360 FOR A%=1 TO N%-1
1370 X1=XT%+(X-XT%)*C1-(Y-YT%)*S1
1380 Y1=YT%+(X-XT%)*S1+(Y-YT%)*C1
1390 X=X1:Y=Y1:DRAW X,Y
1400 NEXT
1410 GCOL 3,C%:PLOT 69,X%,Y%
1420 ENDPROC
1430 DEF PROC_FOLLOW
1440 XT=ADVAL(1)/51
1450 YT=ADVAL(2)/64
1460 PLOT 69,X%,Y%:X%=XT:Y%=YT
1470 PLOT 69,X%,Y%
1480 ENDPROC
1490 DEF PROC_INSTRUCTIONS
1500 PRINT

```

```

1510 PRINT SPC(9);"Etch a Sketch Draugh
tsman"
1520 PRINT SPC(13);"By Mike Cook":PRINT
1530 PRINT"First select a mode by typin
g a letter:-"
1540 PRINT:PRINT"L - Draw a LINE"
1550 PRINT"T - Draw a TRIANGLE"
1560 PRINT"R - Draw a RECTANGLE"
1570 PRINT"P - Draw a POLYGON or CIRCLE
"
1580 PRINT
1590 PRINT"Then move the dot with the t
wo controls."
1600 PRINT
1610 PRINT"Press RETURN at the end of e
ach stage"
1620 PRINT"or to stay in the mode press
SPACE."
1630 PRINT"Alternatively pressing J as
the last key";
1640 PRINT"will Join up the next shape.
"
1650 PRINT:PRINT
1660 PRINT"Other commands are:":"PRINT
1670 PRINT"C - To change the COLOUR"
1680 PRINT"W - To Wipe the screen clean
"
1690 PRINT"S - To SAVE the screen as a
file"
1700 PRINT"G - To GET a screen previous
ly saved"
1710 PRINT:PRINT"Press any key to begin
."
1720 AS=GETS:CLS
1730 ENDPROC

```

This is one of hundreds of programs available FREE for downloading on

MicroLink

In addition to these many BBC Micro programs in the MicroLink library will also run on the Electron.



This listing is included in this month's tape & disc offer. See order form on Page 151.

```

890 UNTIL AS=CHR$(13)
900 ENDPROC
910 DEF PROC_TRIBAND(X%,Y%)
920 MOVE T1X%,T1Y%:PLOT 13,X%,Y%
930 PLOT 13,X%,Y%
940 MOVE T2X%,T2Y%:PLOT 13,X%,Y%
950 ENDPROC
960 DEF PROC_REC
970 PRINT"RECTANGLE";
980 REPEAT
990 PROC_BAND1
1000 REPEAT
1010 PROC_REC_BAND
1020 REPEAT
1030 PROC_FOLLOW:PROC_REC_BAND
1040 OX%=X%:OY%=Y%
1050 PROC_REC_BAND:AS=INKEYS(0)
1060 UNTIL AS<>"
1070 PROC_REC_BAND:GCOL 0,C%
1080 PROC_REC_BAND:GCOL 3,C%
1090 IF AS<>CHR$(13) THEN PLOT 69,X%,Y%
1100 XT%=X%:YT%=Y%
1110 UNTIL AS<>"J"
1120 UNTIL AS=CHR$(13)
1130 ENDPROC
1140 DEF PROC_REC_BAND
1150 MOVE XT%,YT%
1160 PLOT 13,XT%,OY%:PLOT 13,OX%,OY%

```

10 = 0 0	300 = 603D A	590 = 2C6 D	880 = 60E1 8	1170 = 9F11 F	1460 = FFF 9
20 = 4E8D D	310 = ED0F 9	600 = FCCB A	890 = C15F F	1180 = ED0F 7	1470 = B9A7 0
30 = 339F 8	320 = 3419 1	610 = ED0F 3	900 = ED0F A	1190 = A39A 0	1480 = ED0F 5
40 = 1594 7	330 = FF3E 0	620 = F070 6	910 = D916 D	1200 = C542 7	1490 = 4D94 2
50 = 2B3F E	340 = EB27 5	630 = BFBA 4	920 = F2AA 2	1210 = 1B66 4	1500 = FF3E 6
60 = 5008 C	350 = 9032 5	640 = F5E1 7	930 = 8DF1 8	1220 = BFBA 7	1510 = AE7B B
70 = 4EA0 3	360 = 998F 0	650 = 669A 3	940 = D09 5	1230 = 56F9 7	1520 = C8BB 8
80 = 88A9 4	370 = 9DE8 2	660 = A4C 6	950 = ED0F 9	1240 = BFBA F	1530 = 9E74 1
90 = CDAD 2	380 = 17A4 5	670 = 66A7 9	960 = FE5C 3	1250 = 669A F	1540 = DF83 3
100 = 963C 9	390 = 603D 6	680 = 2A4A 0	970 = 87ED C	1260 = 9E09 A	1550 = F632 8
110 = BFBA 6	400 = ED0F A	690 = 36ED 5	980 = BFBA C	1270 = D0C9 8	1560 = 5489 C
120 = 77F2 D	410 = 945 9	700 = ED0F 4	990 = 56F9 7	1280 = 60E1 9	1570 = 4D3 9
130 = 62D7 A	420 = F041 7	710 = 5D03 6	1000 = BFBA F	1290 = C15F 0	1580 = FF3E D
140 = 274E B	430 = 3DEE 1	720 = C040 6	1010 = 139D 7	1300 = ED0F 2	1590 = 99B5 F
150 = 1B11 2	440 = 5C6E 9	730 = BFBA E	1020 = BFBA B	1310 = 4842 8	1600 = FF3E F
160 = 297 6	450 = D67B E	740 = 2995 E	1030 = F477 E	1320 = 3A 3	1610 = 6890 C
170 = 87B2 D	460 = ED0F 0	750 = F611 3	1040 = E61 F	1330 = 6B3D 5	1620 = 2117 8
180 = 7BB1 7	470 = C037 0	760 = BFBA 7	1050 = 95DF F	1340 = 5A0B B	1630 = 24B6 E
190 = 5A6B C	480 = BFBA 3	770 = FA48 C	1060 = 2C6 9	1350 = 7DDE 7	1640 = C41C 1
200 = 1822 D	490 = D2B4 A	780 = FA92 9	1070 = 38A6 A	1360 = C856 9	1650 = C102 A
210 = 91B4 2	500 = 2C6 4	790 = BFBA 6	1080 = A37A A	1370 = 3490 E	1660 = 2CB1 9
220 = 15FE A	510 = E6F8 D	800 = F55 9	1090 = 6F1 C	1380 = B183 C	1670 = 6672 D
230 = FEB9 1	520 = ED0F 3	810 = E61 3	1100 = 72BE 2	1390 = 3C41 1	1680 = DBC9 7
240 = FF3E 4	530 = F054 5	820 = 3606 5	1110 = 60E1 B	1400 = 2C83 9	1690 = 8D67 4
250 = DF 1	540 = BFBA D	830 = 2C6 0	1120 = C15F 1	1410 = 9A45 3	1700 = 381D F
260 = 9032 6	550 = 4FB7 0	840 = CE8A 9	1130 = ED0F A	1420 = ED0F 7	1710 = 198 A
270 = 1927 2	560 = 732E 8	850 = 5556 3	1140 = 9952 0	1430 = 62C8 6	1720 = CEDB D
280 = 5DFE F	570 = FCCB 6	860 = AED7 6	1150 = A39C C	1440 = 3D39 5	1730 = ED0F 0
290 = 17A4 D	580 = E9C0 9	870 = 95CA 4	1160 = F783 0	1450 = FC2A 9	

IF you've just learned to program and don't know what to do next, keep reading. This is the first of a series of articles in which we challenge you to exercise your new-found skill in Basic programming.

It starts on this page with The Challenge itself. You can take up the challenge at various different levels of skill, depending how good you are.

We present you with a problem to solve using your BBC Micro. It contains all the information you need to write the program, and if you are a reasonably competent programmer you'll need no further help.

However, if you are just beginning you might not be able to sort all of it out. But just thinking about the problem and trying out a few ideas will help you develop your programming skills.

What you're going to need follows next month: Hints.

In this I'll set out an algorithm you can use to code the problem. This is simply the method you are going to use to implement the solution. It should be relatively straightforward to convert it into a Basic program providing you are familiar with the language.

Then, in the May issue, we'll present The Solution. I will give you a simple no-frills program that will do the job, along with suggestions for further improvement. You can check this against your own answer and perhaps sort out any points you had difficulty with.

Remember, as far as a program is concerned, there are as many right answers as there are wrong ones, but the solutions I favour are simple and readable.

I will avoid, as much as possible, using fancy tricks or so-called clever programming techniques, as most of the time they are not necessary.

So on to Challenge I which is set in a casino...



It's a challenge!

YOU are down on your luck, standing looking at the roulette wheel, when a shady character tugs at your sleeve. After exchanging a few pleasantries he persuades you to slip outside where he will tell you something to your advantage.

So after cashing your remaining chips you follow him out to the alley behind the casino. He whispers in your ear: "For just a pony, Guv, I can tell you my foolproof plan to win".

Maybe it's the drink that softens your heart, or maybe it's the six-inch stiletto knife you feel poking through his coat into yours, but you decide to give him his money and listen to his advice.

"It's all very simple", he says, pushing the money into his overcoat pocket without even bothering to count it. "Just bet on the red".

Feeling cheated, you ask what happens if you lose. "Even simpler", he replies, "bet on the red again, but this time double your stake. If you lose again, double again, eventually you will win because red is an even money chance".

He continues: "When you count your

Mike Cook throws down

the gauntlet to all our

programming readers

winnings you will find that you are up by your original stake. Drop your bet down again and do it all over again. You can't lose".

With that he slips into the night and you wander home to think about what he has said. Any bet on the red, or the black for that matter, pays even money — what you bet plus your stake back.

So if you bet a pound and lose, then bet two pounds and win, you get four pounds but have only paid out three — one for the first bet and two for the second. As the roulette wheel comprises black and red numbers in equal amounts, a red is bound to come up sooner or later. It's true, you can't lose!

However, you then remember the green — number zero. It's only one place on the wheel, but when that comes up

the house wins all bets. That nudges the odds of the red coming up slightly away from even, but that is only one chance in 37.

Yes, it sounds like a really good scheme, so you go to bed dreaming of what you will spend your money on.

In the morning, once your head has cleared, you begin to think and wonder why, if it is that easy, had that man not done it and made himself a fortune?

Glancing over to your trusty BBC Micro you decide to try it out first with pretend money by writing a program to simulate a roulette wheel and test this strategy.

You want to try this not once but many times to ensure it is no fluke. You need to know how many bets it will take to recover your initial outlay of £25 to the man.

What is the best size of bet? The larger the bet the faster you will make money but, also, the more money you will need when doubling. How much stake money will you have to have in reserve? Is it practical?

● So it's over to you. Can you write the necessary program? If you have problems, next month's hints will help.

TECHNOMATIC

BBC COMPUTERS & ECONET CENTRE

17 Burnley Road, London NW10 1ED Tel: 01-208 1177
305 Edgware Road, London W2 Tel: 01-723 0233

ARCHIMEDES

300 & 400 SERIES

Archimedes 305 Basic	£699(a)
Archimedes 310 Basic	£775(a)
Archimedes 310M Basic	£835(a)
Archimedes 410 Basic	£1,399(a)
Archimedes 440 Basic	£2,299(a)
Monochrome Monitor*	£50(a)
Colour Monitor*	£195(a)

*Monitor prices applicable only when purchased with the micro.

ADD-ONS

0.5Mb Ram upgrade kit (for 305)	£79(c)
2nd Floppy drive (for 305, 310 & 410)	£125(b)
Econet Module (with stn set disc)	£43(c)
Backplane for 2 podules	£39(b)
I/O Podule	£79(b)
20Mb Hard Disc + Podule	£499(a)
CC Rom Podule	£49(d)

(7 skts for ROMs (16K/128K) or RAMS (8K/128K)
Battery backup optional.

More podules are expected in the coming weeks please
telephone for latest updates

IEEE Interface Podule £283(b)

Full implementation of IEEE std 488 1978 & supp. IEEE std 488A 1980. Full specification on request.

SERIAL LINKS

Arc. to BBC Serial Link (Software for both Arc & BBC)	£25(c)
Arc. to PC/XT (Software for both Arc & PC)	£29(c)
Arc External Drive Adaptor	£25(d)

BOOKS: (no VAT)

Arc. Ref Manual	£29.95(b)
ARM Assy Lang Prog	£12.95(d)

SOFTWARE:

PC Emulator	£99(d)
-------------	--------

LANGUAGES:

ANSIC	£95(c)	ISO PASCAL	£95(c)
Prolog X	£199(b)	FORTAN 77	£95(c)
LISP	£199(b)	COMAL	POA

PROGRAMMERS TOOLS:

TWIN Editor	£29(d)
Arc. Toolkit Module	£33(d)
Software Dev T/Box	POA
Software Dev Debug T/box	POA

PRODUCTIVITY TOOLS:

Logistix (incl Spreadsheet, timesheet, d/base & Graphics)	£99(c)
--------------------------------------------------------------	--------

WORDPROCESSORS

View SKM31 (c)	£49(d)
InterWord (e)	£39(d)

DATABASES

Deltabase	£26(d)
Systems DeltaPlus	£60(d)
Alphabase	£41(d)
Viewstore SKM27 (c)	£52(d)

SPREADSHEET

Viewsheets SKM07 (c)	£52(d)
Intersheet (e)	£39(d)

GRAPHICS & ART

Gammaplot	£30(d)
System Gammaplus	£60(c)
Artisan	£32(d)
Interchart (e)	£25(d)

Special Offer

FREE £115 inc vat VOUCHER

with every Archimedes model 310, 410 and 440 purchased from us.

This voucher can be redeemed against any future purchase made from us.

Additionally we will offer discounts upto 10% on Archimedes software and upto 5% on Archimedes hardware stocked by us to all purchasers of Archimedes computers.

This is a limited period offer so do not miss your opportunity for a bargain not to be repeated.

ACCOUNTING SOFTWARE

Minerva's suite 5 Modules (ea) £54(d)

Order Processing, SalesLedger, StockManager, Purchase Ledger & Nominal Ledger

GAMES:

ZARCH	£17(d)
Minotaur	£11(d)

Software packages marked with (e) run under 6502 emulated mode.

Please check on availability of some of the above packages

FILE STORE

Acorn's new file server system

Filestore E01 £825(a)

Filestore E02 £699(a)

Full details on request

ECONET ACCESSORIES

Econet Starter Kit	£85(b)	Econet Bridge	£174(b)
Econet Socket Set	£29(c)	Printer Server Rom	£41(d)
File Server Level II	£75(b)	10 Station Lead Set	£26(d)
Master FS Utility Disc	£17.25(d)		

ECOLINK

Ecolink allows you to connect a PC/XT or AT to an econet network. Supplied complete with comprehensive manual, software and cable.

Full spec on request £299(b)

UPGRADE KITS

1.20S ROM	£15(d)	ADFS ROM	£26(d)
DNFS ROM	£19(d)	1770 DFS Kit	£43.50(d)
BASIC II ROM	£22.50(d)	Econet Kit	£55(d)

EPROMS/RAMS

2764-25	£2.80(d)
27128-25 (12.5V Vpp)	£3.40(d)
27128-25 (21.0V Vpp)	£4.80(d)
6264LP-15	£2.40(d)
27256	£5.00(d)
27512	£9.90(d)

MASTER SERIES

AMB15 Master 128K £346(a)

Incl free educational/fun software pack made up from BBC Publications' range (normal RRP £40)

AMC06 Turbo 65C102 Module £95(b)

ADC08 512 processor £185(b)

ADF10 Econet Module £40(c) Acorn Rom Cartridge £13(d)

ADJ22 Ref Manual I £14(c) ADJ23 Ref Manual II £14(c)

View User Guide £8.50(d) V/sheet User Guide £8.50(d)

TRC2 2ROM TRC4 4ROM Cartridge £11(d)

Cartridge £7.50(d) Master Dust Cover £4.75(d)

TRC32 32K RAM Cart. £29(d)

Acorn 32016 Co Processor £949(a)

Acorn X25 Gateway £2175(a)

Acorn IEEE Interface £265(b)

Universal CoProc Adaptor £69(b)

65C102 2nd Proc for Model B £160(b)

512 Co Proc for Model B £249(b)

(incl DOS+ & GEM suite)

MASTER COMPACT

All Master Compact computers come complete with 128K RAM and an integral 640K 3.5" drive with educational software. We also include our own free bundled educational/fun pack made up from BBC Publications' range with each Compact.

SYSTEM 1 Entry system £310(a)

SYSTEM 2 with 12" Hi Res Mono

Monitor £365 (2xa)

SYSTEM 3 with 14" Med Res Col Monitor

£475 (2xa)

Compact 2nd Drive Kit £95(c)

Serial Kit £25(d)

TV Modulator £26(c)

Mertec Adaptor £35(c)

(upgrades Compact to almost Master level)

External Drive adapter Cable £9(d)

SPECIAL OFFERS

Acorn 32016 Co Processor £899(a)

10MHz upgrade for 32016 £175(a)

(incl free fitting)

Multiform Z80 2nd Processor £179(b)

(incl. MS DOS R/W utility)

AcornSoft C £52(d)

View Professional Master Ver £69(c)

ISO PASCAL Master, B&B+ £46(b)

TRC32 32K RAM Cartridge incl RAM £21(d)

Master Operating System book £6.95(d)

Seikosha GP700 Colour Printer £120(a)

Plotmate A4 Plotter £195(a)

Plotmate A4S Plotter £250(a)

The products listed above are brand new but carry no warranty

RAM/ROM EXPANSION

ATPL Board for Model B. Simple

to instal, no soldering. Allows

expansion to 15 Roms + 2*8K RAMS £37(c)

ATPL Battery backup kit £18(d)

ATPL Board for BBC+ £31(c)

TECHNOMATIC DISC DRIVES

A range of high quality high performance drives to meet the needs of all BBC Micro Users.

All drives fitted with high quality, slim line Mitsubishi drive mechanism and necessary cables.

*All drives are fitted with high quality slim line ultra low power mechanisms capable of single and double density operation and offering fast track access and head setting times. Our confidence in their quality enables us to offer a **two year parts and labour warranty** on these mechanisms without any extra charge.

*5.25" floppy drives are fitted with 40/80 track switches as standard at no extra cost. The switches are located in the front and clearly marked to indicate the status at a glance.

*The mechanisms are set inside attractively styled, sturdy metal casings painted in BBC beige colour.

*All drives fitted with all necessary leads and are ready for operation on unpacking. The drives with the mains power supply are supplied with a mains lead fitted with a suitably fused 13A moulded plug.

*TECHNOMATIC drives stand out from other drives because of the high quality of construction and use of reliable switchmode power supply units on dual drives.



TS 400

5.25" Single Drives 40/80 switchable:

TS400 400K/640K **£90(b)**

PS400 400K/640K with integral mains power supply **£104(b)**

5.25" Dual Drives 40/80 switchable:
TD800 800K/1280K **£170(a)**

PD800 800K/1280K with integral mains power supply **£190(a)**

PD800P 800K/1280K with integral mainspower supply and monitor stand **£209(a)**

3.5" 80T DS Drives:
TS351 single 400K/640K **£67(b)**

PS351 single 400K/640K with integral mains power supply **£85(b)**

TD352 Dual 800K/1280K **£126(b)**

PD352 Dual 800K/1280K with integral mains power supply **£149(b)**

Combo Drives (5.25" & 3.5" drives)
PD853 with integral psu **£165(a)**
PD853P with integral psu **£179(a)**


DISC DRIVE MULTIPLEXER

see page 5 of this ad for details

For Master, B, B+ and any DFS/ADFS

TDM2 Two computers/one drive unit **£65(b)**

TDM4 Four computers/one drive unit **£115(b)**

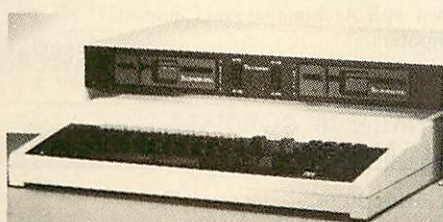

PD 800P

TECHNOMATIC WINCHESTERS

Technomatic offer the most popular range of Winchester drives for BBC micro systems at competitive prices. The drives are fully compatible with Acorn ADFS system. Fan cooled switch mode power supply ensure efficient and reliable operation. Combination of floppy and winchester drives in our elegant plinth housing provides an ideal solution for need to have large storage and ease of transferring data to floppies.

Technomatic front end utility for the Master supplied with the winchesters at no extra cost provides an easy and efficient file management system. The entire contents of the drive are displayed on the screen on boot up, each file or directory appearing as an icon. The icon type indicates whether directory or file and type of data if latter.

Larger capacity drives available on request.

P20HD TECHNOMATIC 20 Mbyte Winchester Drive **£429(a)**

P30HD 30Mb Winchester Drive **£449(a)**

P40HD TECHNOMATIC 40 Mbyte Winchester Drive with Acorn ADFS ROM **£749(a)**

P204HP TECHNOMATIC 20 Mbyte Winchester and a 80T DS floppy Drive built in a monitor stand. **£609(a)**
Includes ADFS Rom.

P2041HT As P204HP but also with a 10 Mbyte tape streamer backup unit and backup utilities. **£1179(a)**
Includes ADFS Rom.

TS10 10 Mbyte Tape Streamer Backup unit with utilities. **£599(a)**

TFC10 10 Mbyte Pre-formatted Cartridge for use with P2041HT and TS10. **£19(d)**

Technomatic Winchesters can be adapted to operate with the SJ Research FileServer by internal modification. However this must be specified at the time of ordering otherwise the drive has to be returned to us for modification.

Adaptor for SJ FileServer **£28**

WINCHESTER Drive Multiplexer

These units let you share a Winchester drive between a number of computers. Full details on request.

TWM2 for two computers. **£99 (b)**

TWM4 for four Computers. **£149 (b)**

NEW

Following the great success enjoyed by our P20HD unit, we are pleased to announce the launch of P30HD – a 30Mbyte hard drive. This drive is also supplied with the free front end utility for the Master. **£449(a)**

BULK DISCS

50 5.25" 40 T single sided discs with sleeves in lockable box. **£25(b)**

50 5.25" 80 T double sided discs with sleeves in lockable box. **£32(b)**

50 3.5" 80T double sided discs with sleeves in lockable box. **£60(b)**

FLOPPICLENE DRIVE HEAD CLEANING KIT

5.25" Kit with 20 disposable discs **£12.50(d)**

3.5" Kit with 20 disposable discs **£14.00(d)**

DISC STORAGE BOXES

DB340 Lockable 40 × 3.5" **£8.50(c)**

DB550 Lockable 50 × 5.25" **£6.50(c)**

DB570 Lockable 70 × 5.25" **£8.50(c)**

DB5100 Lockable 100 × 5.25" **£10.50(c)**

3M FLOPPY DISCS

5.25" Discs in packs of 10

744 40T SS DD **£8.20(d)**

745 40T DS DD **£10(d)**

746 80T SS DD **£12.25(d)**

747 80T DS DD **£13.00(d)**

3.5" Discs in packs of 10

80T SS DD **£15(d)**

80T DS DD **£19.50(d)**

(Add £1 for library case packing)



TECHNOMATIC


305 Edgware Road, London W2 Tel: 01-723 0233

PRINTERS

EPSON LX800	£189(a)
EPSON FX800	£295(a)
EPSON FX1000	£405(a)
EPSON EX800	£395(a)
EPSON EX1000	£539(a)
Colour option for EX800/EX1000	£59(b)
EPSON LQ850	£439(a)
EPSON LQ1050	£529(a)
TAXAN KP815	£269(a)
TAXAN KP915	£369(a)
NATIONAL PANASONIC KXP1081	£149(a)
STAR NL10 (Parallel Interface)	£179(a)
STAR NL10 (Serial Interface)	£219(a)
INTEGREX Multicolour Inkjet printer	£549(a)
BROTHER HR20	£349(a)
NAT PANASONIC KX P3131 includes massive buffer of 38K	£249(a)
JUKI 6100 Daisy wheel printer	£295(a)
BBC/Master Parallel Printer Lead (1.2m)	£5(d)
BBC/Master Parallel Printer Lead (2m)	£7(d)
Compact Parallel Printer Lead (1.2m)	£9(d)
Archimedes Parallel Printer Lead (2m)	£9(d)

PRINTER STAND

A new style printer stand with easy paper feed and paper separation, provides complete access to paper. Can be used with both top and bottom paper feed. Very space efficient. **£26 (b)**

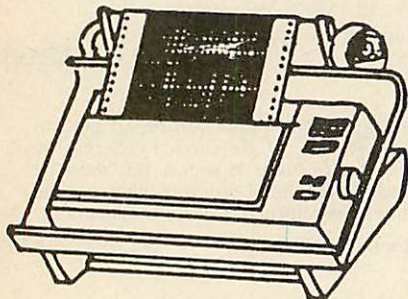

MODEMS

All modems listed below will be supplied with a BBC data lead.

MIRACLE WS4000 V21/23	£135(b)
MIRACLE WS3000 V21/23	£244(b)
MIRACLE WS3000 V22	£409(b)
MIRACLE WS3000 V22 bis	£537(b)
(All modems are BBT approved)	
BBC Data Cable for WS3000/4000	£7(d)
MIRACLE WS2000V21/23 & BELL stds	£92(c)
WS2000 Auto Dial Card	£27(d)
WS2000 Auto Answer Card	£27(d)
S2000 SKI Kit	£5(d)
WS2000 User Port Lead	£5(d)

TIME WARP

Real Time Clock, Plugs into the user port, battery back up as standard, includes manual, demo software including a diary/planner application program **£29(d)**

PLOTTERS

Hitachi 672XD A3 4 Colour HPGL (variety of pens available)	£465(a)
Plotmate A4S	£282(a)
Plotmate A3M	£431(a)

Large Plotters available. Please enquire.

PRINTER SHARERS & BUFFERS

TSB256 Printer Sharer Buffer

Provides a massive buffer size of 256K and connects three computers to one printer. Autoswitching between computers. Facility to print copies. **£189(b)**

BUFFALO PB Buffer

Parallel buffer for internal fitting to most Epson printers. Simple to instal. **£89(c)**

PB128 (128K)

PERIPHERAL & COMPUTER SHARERS

High quality switches to allow the user to switch between computers, printers, modems etc. Fully shielded metal cases, all lines fully switched.

	Parallel	Serial
2 Computers to 1 Printer 36v36-2	£25(c)	25v25-2 £25(c)
3 Computers to 1 Printer 36v36-3	£39(c)	25v25-3 £39(c)
4 Computers to 1 Printer 36v36-4	£45(c)	25v25-4 £45(c)
2 Computers 2 Printers		25v25-x £49(c)
X-over 36v37-x	£49(c)	
BBC Cable Set 3 to 1 (1m ea)	£24(c)	
BBC Cable Set 4 to 1 (1m ea)	£30(c)	

BBC Computer Sharer: TCS26

1 computer to 2 printers fitted with BBC cable **£21(c)**

Paper & Labels

Plain fanfold paper with microperforation:	
2000 sheets 9½ × 11"	£12 (£3.50)
2000 sheets 14½ × 11"	£18.50 (£4.50)
1500 sheets A4 90gsm	£18.00 (£4.00)

Labels/1000

Single Row 3½ × 17/16	£5(d)
Triple Row 27/16 × 17/16	£5(d)

PROGRAMMING ACCESSORIES/SOFTWARE

Compatible with B, B+ and Master EpromRyter (Epromer II)	
EpromRyter is compatible with BBC Master only. See page 7.	£89(b)
Upgrade of Epromer II to Eprom Ryter (Please return your Epromer II)	£49(b)
EPROMER II	£89(b)
MPROMER	£49(c)
META ASSEMBLER	£145(b)
PORTAL EPROM	
EMULATOR 512K	£245(b)
TEAM Disassembler	£145(b)
EPROM ERASERS	
UV1B 6 eproms, safety cutout	£47(b)
UV1T 6 eproms, timer, safety cutout	£59(b)

MONITORS

14" MONITORS

Microvitec 1431 Std Res	£179(a)
Microvitec 1431AP Std Res + PAL/Aud	£199(a)
Microvitec 1451 Med Res	£225(a)
Microvitec 1451AP Med Res + PAL/Aud	£255(a)
Microvitec 1441 Hi Res	£359(a)

Philips 14" RGB

Med Res, high contrast screen, TTL/Linear Input, Mono/Colour Switch Sound Input. Separate controls for brilliance and contrast. This is the monitor used by Acorn with Archimedes and Compact Computers. **£195(a)**

Microvitec 20" RGB/PAL/ Audio Monitors

Microvitec 2030CS Standard Resolution RGB/Comp Video	£380(a)
------------------------------------------------------	---------

Microvitec 2040CS High Resolution RGB/Comp Video	£675(a)
--------------------------------------------------	---------

TAXAN SUPER VISION 620 12" Hi Res/Hi Contrast Option to switch to green/amber BBC/IBM Compatible	£269(a)
--------------------------------------------------------------------------------------------------	---------

TAXAN SUPER VISION 625 12" Super Hi Res and contrast RGB Monitor with option to switch to mono BBC/IBM compatible.	£319(a)
--------------------------------------------------------------------------------------------------------------------	---------

12" MONOCHROME MONITORS

PHILIPS BM 7502 Hi Res green screen	£69(a)
PHILIPS BM7522 Hi Res amber screen	£75(a)
PHILIPS BM 7542 Hi Res Paper White screen	£79(a)

SPECIAL for this month

Swivel Stand for Philips Mono monitors **£6(c)**

(if purchased with monitor)

MONITOR ACCESSORIES

Microvitec Swivel Base (14" plastic monitors)	£17(c)
Monitor Stand Models B & B+	£10(c)
Monitor Stand Master	£13(c)
Double Tier Stand Models B, B+ or Master	£24(b)
Taxan RGB Lead	£5(d)
Microvitec Lead	£3.50(d)
Monochrome BNC/Phono Lead	£3.50(d)

TECHNOMATIC

17 Burnley Road, London NW10 1ED Tel: 01-208 1177

CAD/DRAWING PACKAGES

NOVACAD Cad Package for B, B+ & MASTER. (See page 5 for specification)	
Tracker Ball/Mouse Version (TM)	£49 (d)
TM Version plus Tracker Ball	£94 (d)
TM Version plus Mouse	£79 (d)
Plotter Driver Generator	£15 (d)
MOUSE	
AMX MOUSE with SUPER ART (pse specify B, B+ or Master)	£59 (d)
STOP PRESS (Pagemaker)	£32 (d)
EXTRA/EXTRA (utility for the Pagemaker)	£19 (d)
MAX	£17 (d)
STAND ALONE MOUSE (includes horizontal scroll lock)	£34 (c)
RB2 TRACKER BALL RB2 Tracker Ball with Icon Master (for B, B+ & Master)	£59 (c)
RB2 Tracker Ball with Cursor Control Rom (for Master only)	£59 (c)
RB2 Tracker Ball 'Stand Alone' for use with NOVACAD & other software)	£47 (c)
Cursor Control Rom for Master	£12.50 (d)
MIRRORSOFT FLEET STREET EDITOR	£35 (d)

CP/M SOFTWARE

Please send for details on our range of CP/M software for Acorn/Torch Z80 2nd Processors

BBC SOFT/FIRMWARE

DATABASE MANAGEMENT SYSTEMS

VIEWSTORE	£37 (d)
STARdataBASE	£39 (d)
MASTERFILE II	£17 (d)
ACORN OVERVIEW PACKAGE Special Offer (RRP £86)	£69 (b)

WORD PROCESSORS

ACORN VIEW PROFESSIONAL (BBC)	£75 (c)
VIEW 2.1	£35 (d)
VIEW 3.0	£48 (c)
VIEW INDEX	£12 (d)
VIEW PRINTER DRIVER GENERATOR	£7 (d)
VIEWSPELL	£29 (d)
DOT PRINT PLUS	£28 (d)
WORDWISE	£24 (d)
WORDWISE PLUS	£38 (d)
WYSIWYG PLUS	£21 (d)
SPELLMASTER	£47 (d)
INTERWORD	£39 (d)
WORDEASE	£24 (d)
SPELLCHECK III	£31 (d)
EDWORD II	£43 (c)

SPREADSHEETS

VIEWSHEET	£37 (d)
WINDOWMATIC	£15 (d)
VIEWPLOT	£22 (d)
INTERSHEET	£37 (d)
INTERCHART	£26 (d)
ULTRACALC	£26 (d)
MINI OFFICE II DISC Version For B & B+ 40T or 80T	£14.75 (d)
For Master 80T	£17.30 (d)
For Compact	£19 (d)
MINI OFFICE II ROM Version For Master, Compact, B+ & B	£48 (c)
MEGA 3Rom	£82(b)
CC's integrated package offering Interword, Intersheet & Interchart on one 128K ROM. For Master, Compact, B+ & B	

LANGUAGES

META ASSEMBLER	£145 (b)
TEAM DISASSEMBLER	£145 (b)
MACROM	£33 (d)
ACORN MICRO PROLOG	£62 (d)
ISO-PASCAL	£51 (c)
ISO-PASCAL STAND ALONE GENERATOR	£30 (d)
OXFORD PASCAL (40 or 80T) Specify B or B+	£36 (d)
OXFORD PASCAL for Master	£52 (d)
ACORN LOGO	£46 (c)
LOGOTRON LOGO	£55 (c)
BBC PUBLICATIONS OPEN LOGO	£59 (c)
ACORN LISP ROM	£39 (d)
ACORN FORTH ROM	£39 (d)
ACORN COMAL ROM	£39 (d)
MICROTEXT	£52 (c)
MICROTEXT PLUS	£229 (b)

COMMUNICATIONS

TERMULATOR	£25 (d)
COMMSTAR II	£28 (d)
MAYA Comms Package See next page for details	£49
MODEM MASTER	£11 (d)
COMMAND	£34 (d)
MASTER TERMULATOR	£34.75 (d)

UTILITIES

ACORN BASIC EDITOR	£24 (d)
MONITOR (BBC Pub)	£19 (d)
SLEUTH	£23 (d)
TOOLKIT PLUS	£31 (d)
TOOLBOX 2 (BBC Pub) Manual Cassette	£9.50 (d) £9 (d)
ACORN GXR GRAPHICS ROM specify B or B+	£24(d)
PRINTMASTER	£24 (d)
PRINTWISE	£24 (d)
DUMPMASER	£26 (d)
FONTWISE PLUS	£17 (d)
ADV TELETXT UTILITIES ROM	£7.95 (d)

COMPACT (all on 3 1/2" disc)

ARTROOM	£27 (d)
FONTWISE +	£22 (d)
FONT EDITOR	£22 (d)
BETABASE	£27 (d)

WHITE KNIGHT MKII	£16 (d)
BBC PUBLICATIONS BUNDLED SOFTWARE	£18.50 (d)

BBC PUBLICATIONS EDUCATIONAL SOFTWARE

A series of programs developed in many cases alongside Radio & TV programmes by BBC's Education Department which supplement the classroom studies by moving and colourful displays helping in clear understanding of a variety of subjects. Some packages also include audio cassettes.

PRIMARY EDUCATION

ASTRONOMY	£11 (d)
COMPUTERS AT WORK Aud/EC/disc	£16 (c)
PICTURE CRAFT	Disc£17 (d)
INTRODUCING GEOGRAPHY	Disc£16 (d)
MATHS WITH A STORY 1	Cass£8 (d)
MATHS WITH A STORY 2	Cass£8 (d)
NUMBER GAMES	Cass/EC£7.50 (d)
USING YOUR COMPUTER	Cass£24 (c)

SECONDARY LEARNING

TECHNOLOGY & DESIGN Pt1	£21.50 (c)
ELECTRIC FIELDS	£10.50 (d)
ADVANCED LEVEL	
STUDIES: STATISTICS	Disc£23 (d)
ADVANCED STUDIES: GEOGRAPHY	Cass£10 (d)
INSIDE INFORMATION	Prog Cass£10 (d)
	Book£8 (d) Audio Cass£5 (d)
SCIENCE TOPICS (ST)	
S.T.:WAVES	Disc£14 (d)
S.T.:RELATIONSHIPS	Disc£14 (d)
S.T.:BONDING	Disc£14 (d)
S.T.:ELECTROMAGNETIC SPECTRUM	(d)
S.T.:ELECTRONICS IN ACTION	Disc£14 (d)
S.T.:NEWTON & THE SHUTTLE	Disc£19 (d)
S.T.:ECOLOGY	Disc/EC£19 (d)
S.T.:POLYMERS	Disc/EC£19 (d)
S.T.:CLASSIFICATION & PERIODIC TABLE	Disc£20 (d)
S.T.:FOOD & POPULATION	Disc£20 (d)
SEC.SCIENCE	
MICROTECHNOLOGY	Cass£7 (d)
SEC.SCIENCE:THE MOLE CONCEPT	Disc/Aud/EC£16 (c)

GENERAL

VU-TYPE PROFESSIONAL	Disc£19 (d)
WHITE KNIGHT MK II (for 1770 DFS)	Disc£16 (d)
BATTLEFIELDS	Cass£8.50 (d)
A VOUS LA FRANCE	Cass/EC£17 (d)
	Book£5.25 (d)
	Audio Cassettes
	(2) £7.50 (a)
Additional charges for discs	
	£9.00 (d)
DEUTSCH DIREKT	Disc/aud/EC£16 (c)
	Book£5.95 (d)

BLACK QUEEN A long awaited bridge game. (1770DFS)	£13(d)
BISMARCK History of the famous battleship. (1770DFS)	£13(d)

Cassette based programs listed above can be supplied on disc at an extra charge of £1.50 per disc and please specify the format required 40 or 80T.

TECHNOMATIC

305 Edgware Road, London W2 Tel: 01-723 0233

BOOKS

No VAT Carriage Code (c)

LANGUAGES

6502 Assy Lang Prog.....	£19.95
6502 Programming.....	£13.95
8086 Book.....	£23.95
Acorn BCPI User Guide.....	£15.00
Acorn FORTH.....	£7.50
Acorn LISP.....	£7.50
Acorn ISO Pascal Ref Manual.....	£10.00
Intro to COMAL.....	£10.00
Intro to LOGO.....	£7.50
Micro Prolog Ref Manual.....	£10.00
Introduction to Turbo Pascal.....	£14.95
Prog the Micro with Pascal.....	£8.50
The Supervisor's BBC Micro.....	£10.95

BBC MICRO GUIDE BOOKS

Inside Information.....	£8.95
Maths Prog in BBC Basic.....	£7.95
The Friendly Computer Book.....	£4.50
Toolbox 2.....	£10.95

ARCHIMEDES

Archimedes Reference Manual.....	£29.95(b)
ARM Assembly Language Prog.....	£12.95(b)

PROGRAMMING/UTILITY

Advanced Sideways Ram User Guide.....	£9.95
Advanced User Guide (BBC).....	£15.95
Applied Assembly Language on the BBC.....	£9.95
BBC Micro Advance Programming.....	£9.95
BBC Micro Ref Guide (B Smith).....	£10.95
BBC Micro Sideways ROM's RAM's.....	£9.95
Guide to the BBC Rom.....	£9.95
Beginners Guide to W.P.....	£7.95
Mastering Assembly Code.....	£8.95
Mastering Interpreters & Compilers.....	£14.95
Master Operating System.....	£12.95
Mastering View, Viewsheets & Viewstore.....	£12.95
View by B. Smith.....	£12.95
View 3.0 User Guide.....	£9.00
Viewstore User Guide.....	£9.00
Viewsheets User Guide.....	£9.00
Wordwise Plus.....	£9.95

SOUND & GRAPHICS

Computer Graphics & CAD Fundamentals.....	£9.95
Mastering Music.....	£6.95

DISC DRIVE SYSTEMS

Advanced Disc User Guide.....	£16.95
Disc Book.....	£3.50
Disc Programming Techniques.....	£7.95
Disc Systems.....	£6.95
File Handling on the BBC.....	£6.95
Discovering Disc Drives.....	£POA
Practical Disc File Techniques.....	£5.95
Mastering the Disc Drive.....	£12.95
Mastering DOS plus.....	£12.95

APPLICATIONS

Interfacing Proj for BBC.....	£6.95
BBC and Small Business.....	£5.75
The Software Business.....	£5.50

Mastering Operating System

(David Atherton) £6.95

WYSIWYG PLUS

WYSIWYG PLUS is a printer and screen utility for Wordwise Plus, View, Interword, and Basic users, supplied on a 16K Eprom. To obtain a particular printer effect, such as enlarged text, it used to be necessary to discover the appropriate 'printer control code' from your manual and incorporate it into your text. Secondly, you had to print several trial copies in order to position the effect correctly in relation to the rest of your text.

WYSIWYG PLUS simplifies this trial and error approach using easily remembered *commands. For example, *ENLARGED not only selects enlarged text on your printer, but uniquely shows you double width characters on your screen, even from within Wordwise Plus!

WYSIWYG PLUS incorporates a logo editor. Just draw your design on screen using the arrow keys, and save the results. Use the *GRAPHICS command to incorporate your design anywhere in your text; position and see your design in your text before faithfully reproducing a hard copy.

There is also special help for daisy wheel users. The *WHEEL command will prompt you to change daisy wheels whenever a change in type style is about to occur.

WYSIWYG PLUS is designed to work with the following systems:

BBC Model B	6502 Second Processor,	BBC Master 128	All printers (Except lasers)
BBC Model B+	Turbo coprocessor	BBC Compact	

WYSIWYG PLUS workspace is relocatable.

MAYA TERMINAL EMULATOR

A comms package for the professional user. **MAYA** emulates DEC VT52, VT100 and Tandberg TDV2215. Special BBC VDU mode allows full access to the BBC VDU driver.

Menu driven software allows the setting up of parameters and function key definitions which can be saved to disc for future use.

Flexible command parser provides a uniform user interface and allows full access to * commands and HELP facilities.

Xmodem and Kermit file transfer protocols are included as standard. Unique feature of **MAYA** is that Kermit can also be used in 'remote mode', which allows file transfers to be initiated by other computers connected to the BBC. File transfers can also be done with a 'dumb' ASCII protocol. Open architecture allows for expansion and addition of new features. Options currently under development are graphics drivers for Tektronix 4010/4014 emulation, TDGR driver for TDV2215 and a Viewdata patch (provisional version included in the current issue). Registered users will be provided with regular updates and customisation service will also be available to those interested.

The package comprises of a rom, utils disc and a comprehensive manual. It is compatible with Master, Models B & B+. It supports DFS, ADFS, NFS and ANFS filing systems.

BLACK QUEEN

A contract bridge program from BBC Publications both for beginners and for club players. Features include rebid and/or reply of any deal just played. Deals can be saved to a disc. Unique feature of **Black Queen** is its ability to construct deals from standard or classic ones in newspapers etc.

Compatible with Master, B and B+ **£13(d)**

EDUCATIONAL/FUN SOFTWARE BUNDLE

Wordmover	Drawstick
Wordplay	Pantry Antics
	Locomotion

These programs are supplied from the BBC Publications Educational Software range and will be supplied on a 5.25" disc for BBC Master, B+ and B and on a 3.5" disc for the Compact.

5.25" Disc **£17.50(d)**

3.5" Disc **£18.50(d)**

(Normal RRP over £40)

VU-TYPE

Do you have finger trouble when typing?

Do your letters look like this?

Dear Sor,

I wuold like to...

then you need:

VU-type, a complete touch typing program produced by BBC/Pitman.

It allows you to learn at your own pace and has a wide range of exercises. Screen displays show the keys you have pressed and it will report on your speed and accuracy.

Supplied on a 40T Disc with a manual.

Available at a special price of **£7.50(d)** instead of the usual £15. Offer valid while stocks last.

BISMARCK

An enthralling game of strategy involving the famous German battleship of the same name.

You can play the role of British Navy in its quest to find the Bismarck and sink it or take either British or German role against another player. It requires the highest qualities of judgement, observation and decision to plan strategy and tactics to plot the death of Bismarck. **£13(d)**

PRINTER ACCESSORIES

EPSON ACCESSORIES:

Interfaces	
8143 RS232.....	£30 (d)
8148 + RS232 + 8k.....	£65 (d)
8177P NLQ for FX80 +/FX100 +.....	£99 (d)
Parallel & Serial Buffers of various size also available.	
LQ800 Tractor Feed.....	£47 (b)
LQ1000 Tractor Feed.....	£52 (b)
SHEET FEEDERS:	
LQ800.....	£135 (b)
LQ1000.....	£179 (b)
EX800.....	£135 (b)
EX1000.....	£309 (b)
FX800.....	£135 (b)

FX1000.....	£179 (b)
Ribbons:	
RX/FX100/100 +, FX105.....	£7 (d)
RX/FX80/80 +, FX85.....	£4 (d)
LX80/LX800.....	£4.50 (d)
LQ800.....	£8.50 (d)
LQ1000.....	£10 (d)
EX800/1000.....	£7.50 (d)
H180 Pen Set (Aqueous/Ball point).....	£8.25 (d)
HITACHI 672 Plotter	
Aqueous Pen Set six pens.....	£18.50 (d)
Oil Based Pen Set six pens.....	£25.00 (d)
TAXAN CANON Accessories:	
Ribbon, KP810/815/910/915.....	£6 (d)

Star Printer	
NL10 Sheet Feeder.....	£52 (b)
NL10 Ribbon.....	£4.50 (d)
National Panasonic KX P1080/81	
Spare Ribbon.....	£4.50 (d)
KXP3131 Tractor.....	£90 (a)
KXP3131 Sheet Feeder.....	£189 (a)
JUKI 6100	
Tractor Feed.....	£149 (a)
Ribbon (Carbon).....	£2.00 (d)
Sheet Feeder.....	£219 (a)
BROTHER HR20	
Tractor Feed.....	£116 (a)
Spare Ribbon Nylon.....	£3.00 (d)
Spare Ribbon Carbon.....	£4.50 (d)

INTEGREX INK JET COLOUR PRINTER

Spare Ink Cartridge Black.....	£9 (d)
Spare Ink Cartridge Colour.....	£15 (d)
Paper Roll.....	£7 (d)
Printer Leads:	
BBC Parallel Lead (1.2m).....	£6 (d)
PAPER & LABELS	
Plain Fanfold paper with micro perforations:	
2000 sheets 9½" × 11" 60 gsm/sq m.....	£12 (£3.50)
2000 sheets 14½" × 11" 60 gsm/sq m.....	£18.50 (£4.50)
1500 sheets A4 90 gsm.....	£18 (£3.50)
Labels/1000:	
Single Row 3½" × 1½".....	£5.25 (d)
Triple Row 2½" × 1½".....	£5 (d)

NOVACAD

Computer Aided Draughting for the BBC Micro

"Novacad can drive a plotter to provide drawings of a high quality... Novacad is excellent. It is flexible, genuinely easy to operate without much practice, and a pleasure to use." **Beebug December 1986**

A sophisticated CAD package with unique facilities which are generally confined to the professional CAD packages costing thousands of pounds.


NOVACAD is being used in widely differing fields ranging from leading British industries for producing engineering drawings to Accountants' offices for producing flow charts. Architects,

"Novacad is a professional package, well worth the £90 for the ROM and disc and is expandable to suit your own particular requirements. I would have no reservations if I heard Novacad called, 'the best on the market'." **A&B Computing August 1986**

engineers, plumbers, kitchen planners and many other professions requiring easy to use facilities for producing professional quality output are making extensive use of NOVACAD's unique features. NOVACAD is proving to be an invaluable teaching aid in technical schools and colleges simply because of the ease with which it can be used.

NOVACAD'S MAJOR FEATURES

- * Simple and easy to use with logical command sequence.
- * A large drawing area (approx 15 screens).
- * The ability to create complex icons (up to 500 lines instead of the usual 15 to 20 pixels), store them in a library and recall them at different scales and orientations.
- * A zoom facility allowing magnification of up to 20 times to insert finer details.
- * Block copy of shapes on the screen for repetitive use.
- * Text entry at any 90° orientation at any position on the screen.
- * Create multi layer drawing with 8 levels available.
- * Full compatibility with the BBC range with minimal hardware requirements yet having the capability of exploiting the potential of the extra shadow memory or the second processor's memory and speed.
- * Printer routine for Epson 80 and 136 column printers.
- * A unique optional facility to output to any BBC compatible plotter.
- * Cursor control from keyboard, tracker ball or mouse.

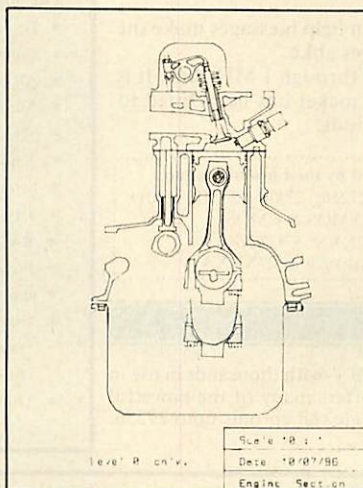

NOVACAD is compatible with all BBC models fitted with Acorn DFS. It has minimum hardware requirements of a single drive and a Epson compatible printer to get started though NOVACAD will utilise fully a dual drive system and 6502 2nd processor or the shadow ram on the B+ series. To obtain high quality drawings we recommend a BBC compatible plotter and our plotter driver generator.

With basic BBC B, NOVACAD operates in mode 4 allowing use of any 2 colours. With shadow memory of the BBC+ or the Master, it can also operate in mode 0 for higher resolution or mode 1 for allowing use of any 4 colours, and it will provide additional user memory for more complex drawings.

6502 second processor or the Turbo on the Master will also increase the drawing speed considerably.

**NEW
REDUCED
PRICE**

£49(d)

**Plotter Driver
Generator £15(d)**

OPTIONAL EXTRAS

Plotter driver generator is available as an optional extra to configure a plotter routine for any BBC compatible plotter. Pre-configured programs for the popular plotters like Epson HI 80, Hitachi 672, Plotmate, Penman and HP GL. This program allows the drawing to be scaled to the maximum plotter size thus enabling drawing of A2 and A3 sizes to be produced with equal ease. The zoom facility will enable inaccuracies of drawing on the screen to be eliminated.

BBC SPARE PARTS

BBC B & General

Power Supply	£52.00 (b)	DS3691	£4.50 (d)
Keyboard Connector	£5.00 (d)	88LS120	£6.50 (d)
Complete Keyboard	£52.00 (b)	LM324	£0.45 (d)
Keyswitch (state type)	£1.75 (d)	SAA5050	£9.00 (d)
Modulator UM1233	£4.80 (d)	UPD7002	£7.00 (d)
Video ULA	£18.00 (d)	NE555	£0.50 (d)
Serial ULA	£14.00 (d)	68B50	£2.50 (d)
ADFS ROM	£26.00 (d)	74ALS245	£5.00 (d)
6502A	£5.50 (d)	WD1770	£24.00 (d)
17.734 MHz Xtal	£2.50 (d)	68B54	£8.00 (d)
16 MHz Xtal	£2.50 (d)	75159	£2.20 (d)
6522A	£5.50 (d)	76489	£4.00 (d)
6845SP	£6.50 (d)		

BBC B +

Keyswitch (state type)	£1.75 (d)
Modulator UM1233	£4.80 (d)
B+ OS	£18.00 (d)
PAL16RH	£18.00 (d)

BBC MASTER

Power Supply	£65.00 (b)
Keyboard Connection	£3.75 (d)
Keyboard	£65.00 (b)
Keyswitch (state type)	£1.75 (d)
1 Mb OS ROM	£39.00 (d)
CF30060 ULA	£10.00 (d)
CF30047 ULA	£15.25 (d)
CF30048 ULA	£15.25 (d)
CF30049 ULA	£15.25 (d)

CF30050 ULA	£19.75 (d)
CF30058 ULA	£15.00 (d)
6818	£4.00 (d)
65SC12	£15.66 (d)
50464	£3.50 (d)
74F00	£1.00 (d)
74F74	£1.40 (d)
74HCT253	£3.50 (d)
9637	£2.00 (d)
32.768 MHz Xtal	£2.00 (d)

2nd PROCESSORS

ULA (512)	£34.00 (d)
ULA (6502 & Z80)	£28.00 (d)
Power Supply	£42.00 (b)

TECHNOMATIC
MAIL ORDER & RETAIL
17 Burnley Road
London NW10 1ED
Fax: 01-452 1500
Telex: 922800

RETAIL SHOPS
15/17 Burnley Road, London NW10 1ED
Tel: 01-208 1177 Telex: 922800
(close to Dollis Hill ☺)
West End Branch
305 Edgware Road, London W2
Tel: 01-723 0233, 01-402 0444
(near Edgware Road ☺)

For fast delivery telephone
your order on 01-208 1177
using VISA/Access Card



Orders welcome from
government depts &
educational establishments

All prices ex VAT.
Prices are subject to
change without notice
Please add carriage
(a) £8.00 (Datapost)
(b) £2.50
(c) £1.50
(d) £1.00

EpromRyter

***Highly sophisticated & Advanced Programmer**

***Handles all current single rail Eproms**

***State of the Art Programming Algorithms**

EpromRyter is a powerful eprom programmer designed for use with the BBC Master Computer. It takes full advantage of the latest developments in the eprom technology and the extra facilities on the Master to provide fast, simple and efficient programming and editing facilities.

The software is totally menu driven and on screen help messages make the programming simple for both specialists and novices alike.


The EPROMRYTER interfaces with the Master through 1 MHz bus. It is mains powered with its own psu. 3M Textool zif socket has been fitted to ensure consistent and reliable service over long periods.

**NEW
LOW PRICE
£89 + VAT**

The single rail eeproms handled by the EpromRyter are:
● 2716 2732 2764 27128 27256 27512 27513 27011
2516 2532 2564 (NMOS & CMOS)
● One time eeproms P27XXX, 87CXXX etc.
● Also A suffix eeproms such as 27XXXXA

EPROMER II

A proven Eprom programmer for BBC Model B and B+ with thousands in use in industry, educational and R&D establishments. It offers many of the powerful features of the EpromRyter and can program all single rail eeproms upto 27256. Full details on request.

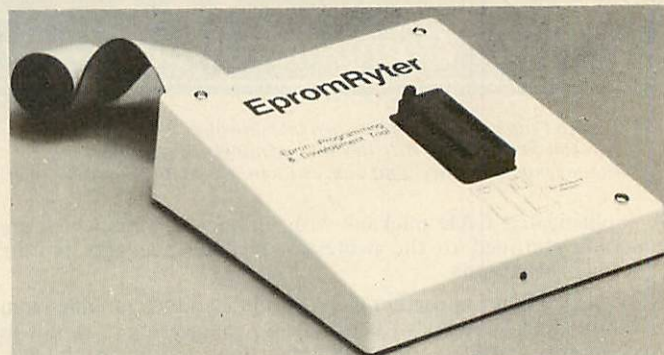

The main features of the programming software are:

- * Device, function and voltage selection from the computer keyboard.
- * Continuous display of the options selected.
- * All eeproms upto 27512 (64K) programmed in single pass.
- * Automatic Intelligent identifier support for eeproms able to respond.
- * Selectable programming voltage 25/21/12.5V
- * 3 programming methods: Normal, Intelligent & Pulse (30 sec for a 27128).
- * Serial port protocols supported incl Intel Hex & Motorola S.
- * DFS, NFS, ADFS and Rom Filing System Supported.
- * BASIC/Machine Code programming using RFS.
- * Powerful editor with input in HEX or ASCII. * Full editable 64K file.
- * Block move of data within the address range.
- * User can select any section of the eeprom from single byte to the full address range to blank check/burn/verify. Facility to program single bytes makes program development/amendment simpler.
- * Multiple loading for ROM Filing System

Some of the above features apply to Master Computers only

META Version III

"All the good features you would expect to find in a good source code editor are present... Meta assembler lives in a different world. It is structured to work with any new processor... as new instruction sets can be added... as needed... has a well featured editor with colour highlighting, a sound modular approach."

Acorn User October 1986

- Assembles for over 30 popular processors, including Z80, 6800/01/02/04/05/09/11 etc — and 68000 — using native mnemonics for each processor, eg. LD A, (HL) for Z80 and MOV AO, \$1000 for 68000 etc.
- Fully integrated Editor: four field, all search, search/replace, block copy, delete, move, marked save, load etc.
- Compatible with Portal Eprom Emulators and Team Disassemblers.
- Send object code in Intel Hex, S-Record, straight binary etc. down to discs, RS232, parallel port, Eprom Emulators etc — all during Assembly.
- Over 50 directives included as standard: handling nestable macros, conditional assembly and twenty types of table definition directives.
- 32 bit labels; 31 character names. Arithmetic and Boolean arithmetic to 32 bits.
- Modular source code with numeric and string parameter passing.
- Serial communicator area with eight options lines: echo, control code trap, LF suppression/addition etc.
- Over 500 in use throughout the world in universities and many different industries.
- Two 16K Roms, two 80 track discs, A4 ring-band manual, function-key strip.

PORTAL EPROM EMULATORS

- Emulates 2716, 2732, 2764, 27128, 27256, 27512 eeproms at 150ns Access time.
- Load at 4Kbytes/second — No "erase" time.
- 28 pin header plugs into Eprom socket on target system — status monitored on 13 Leds.
- Fully software controlled from Meta Assembler.
- 100 times faster than standard EPROM program/erase cycle.
- Fully CMOS compatible; draws no power from target system.
- Four portals may be independently programmed off same user-post cable.
- Complete with all cables, manual and disc.

PORTAL 512 (2716, 2732, 2764, 27128, 27256, 27512).

TEAM DISSASSEMBLER

The third part of the Universal Development System: a Meta labelling disassembler.

Supports 1802, 8080, 8085, HD64180, Z80, 65XX (includes 65 col, 6511 etc), 68XX (includes 00, 01, 02, 03, 08 etc):

- Up to 64K of object code translated back into META compatible source code modules: labels automatically inserted on all jump targets, memory references etc.
- Pre-editing stage allows marking of object code areas as byte, string, word, long word etc, tables. These areas disassembled into appropriate directives instead of garbage mnemonics.
- Reconstituted source code ready for immediate re-assembly by META.
- Omniversal search/replace for re-naming arbitrary label names with meaningful ones.

THE TECHNOMATIC BBC CATALOGUE REVISED WINTER CATALOGUE

This advertisement can only show an example of the range of products stocked by Technomatic. So send for our latest BBC catalogue providing detailed information and prices on BBC Computer Systems, Peripherals, Software and Books. To obtain your free copy please complete and return the coupon below. Technomatic is a BBC Computer and Econet Referral Centre providing a professional and reliable service to the BBC user.

NAME.....

ADDRESS.....

.....Post Code.....

Return to Technomatic Ltd, 17 Burnley Road, London NW10 1ED

NEW

P.M.S.



PROUDLY ANNOUNCE

GENIE Junior

ONLY
£25
INC VAT

NOW AVAILABLE—
A DISK BASED
VERSION OF THE
HIGHLY ACCLAIMED
GENIE "POP-UP" SOFTWARE.

requires no special hardware—Just 1 ROM + 1 Disk

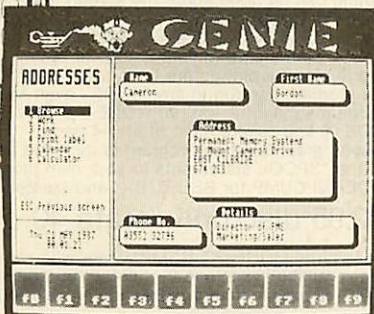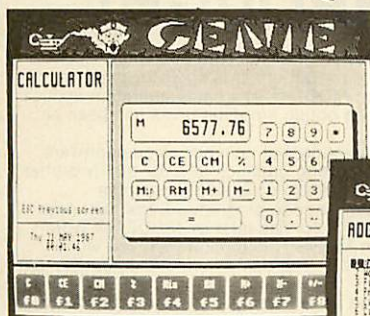

WHAT THE PRESS SAYS ABOUT GENIE

"MICRO USER" Oct 87...stunningly simple to use...neat, well packaged, well written...

"ACORN USER" Aug 87...Genie is a superb package...I couldn't be without it...

"Pop. Comp. Wkly" June 87...rapidly becomes an integral part of your system...well designed...

"A&B Computing" June 87...extreme friendliness of design...eminently practical piece of software...

"Your Computer" July 87...a product which can stand alongside its 16 bit role model...one piece of software I have always wanted...


"BEEBUG" Aug 87...extremely versatile...a most useful piece of firmware...

Clearly the reviewers wanted Genie—now you can afford to have one!

A simple key press (CTRL-Shift-G) halts the current task—requests you insert the GENIE Disk and GENIE Junior responds, "Your Wish is My Command". When finished—a single key stroke drops you back to exactly where you left off.

GENIE Junior "Pops-up" from within Basic, Wordwise, the Inter Series, the View Family, Ultracalc and virtually all serious software.


GENIE Junior has exactly the same, highly praised, desktop utilities as its battery backed big brother—notepad, address book, diary, calendar and calculator—but Junior stores all its data on disk, not battery backed RAM.

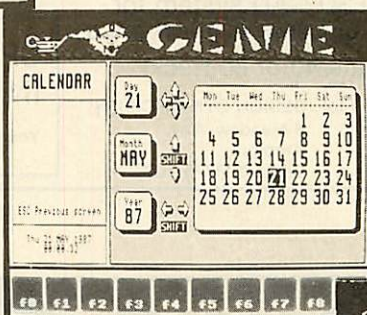

GENIE Junior is available for all BBC Micros — B, B+, Master 128, Compact.

Disk formats supported—3.5", 5.25", DFS, ADFS (Ramdisk/Winchester/Network versions will be available—Contact Sales Office before ordering).

Compatible with sideways RAM, Shadow RAM, 65C02/512/Z80 second processors.

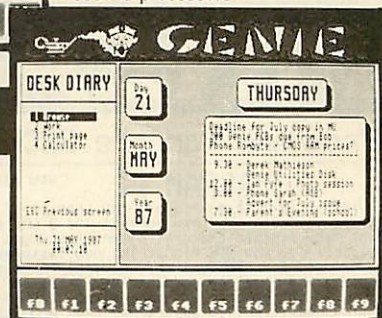

MASTER CARTRIDGE GENIE

For all you MASTER users who are short of ROM sockets—here is a version of GENIE which simply plugs into one of the cartridge slots. All the features of the original, battery backed GENIE in a cartridge with a high quality gold edge connector.

ADDITIONAL SIDEWAYS RAM. Since each cartridge slot is effectively 2 ROMS sockets, and GENIE only occupies one of them, PMS can fit an optional 16K of sideways RAM inside the GENIE cartridge. This can be used in exactly the same way as the MASTER's internal sideways RAM. The additional sideways RAM costs £15, and must be specified when ordering GENIE.

GENIE UTILITIES DISC – MORE WISHES GRANTED

OTHER PMS PRODUCTS

Write or phone for information sheets.

Price (£)

Inc VAT

NEW	GENIE MASTER CARTRIDGE.....	79.35
	(extra 16K sideways RAM).....	15.00
	GENIE IN A BOX (battery backed).....	79.35
NEW	GENIE JUNIOR (disk based).....	25.00
NEW	GENIE WATCH (RTC for the BBC).....	29.90
NEW	GENIE UTILITIES DISK.....	9.95
	B2P-65C02 BBC 2nd Processor NEW PRICE	89.95
	HIBASIC (disc or ROM).....	5.00
	HiWORDWISE PLUS (for B2P only).....	6.00
	E2P-65C02 Electron 2nd processor.....	79.00
	Electron WORDWISE PLUS (requires E2P).....	34.95
	MULTI-FONT NTQ (2 ROM set).....	34.00
NEW	NTQ FONT LIBRARY DISKS (12 fonts each).....	15.00
	THE NTQ HANDBOOK—by Dave Fitcher.....	9.95

Carriage: under £50—add £1, over £50—add £2.

Overseas: deduct VAT and add £4 carriage.

Contact Sales Office for details of Educational Bulk Discounts and Site Licences.

ORDER FORM

Please supply:

Quantity Item Price

Post and Packing

I enclose cheque/postal order for

OR Debit my ACCESS/VISA/BARCLAY by

CARD No. Expiry Date

NAME (Print please)

ADDRESS

POST CODE

MY COMPUTER SYSTEM (Please circle as appropriate)

BBC B/BBC B+/MASTER 128/MASTER COMPACT/ELECTRON

5.25"/3.5" DFS/ADFS—ACORN/WATFORD/SOLIDISK/other

Other relevant hardware




Permanent Memory Systems
38 MOUNT CAMERON DRIVE
EAST KILBRIDE G74 2ES
SCOTLAND

03552-32796



(24 hour)

INTERACTIVE 3D

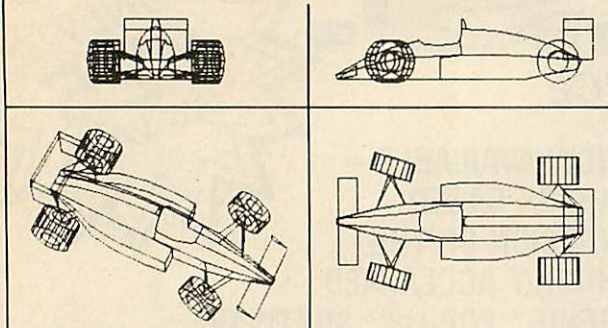

INTERACTIVE 3D is a unique program that actually allows you to create a design directly in a 3D view. And you can zoom, rotate and change view at any time to visualise the effect of design changes. Full editing facilities allow you to create and delete points and lines, and adjust their positions in any direction, all under cursor control without having to enter any numerical data. Circles can be generated automatically and symmetrical forms can be created by reflections. Designs can be saved to tape/disc and reloaded. Views shown on the screen can be saved or printed. Altogether, nearly 50 operations are included. For BBC B, B+ and MASTER series.

- * Acclaimed in reviews (Micro User, Beebug, A&B etc)
 - * Widely used in schools, colleges and industry
 - * Licenced to Education Authorities
 - * Sold in nearly 20 different countries worldwide
 - * Probably the most powerful 3D CAD system for any home micro, and at an unbelievably low price
- £8.95 cassette £12.95 disc (state 40 or 80 track)

DESIGN DYNAMICS

Cheque/PO to: DESIGN DYNAMICS, [C]
8 Meadow Way,
Amphill,
Bedford MK45 2QX

MODE-ØØ DUMP

640 X 512

RESOLUTION BREAKTHROUGH!

The BBC computers have quite high resolution graphics. The maximum horizontal resolution of 640 is good but the overall effect is spoiled by the mediocre vertical resolution of 256, even in MODE Ø. The same limitation applies to normal screen dumps, so the only way to obtain smooth curves has been an expensive plotter.

Nothing can be done about the screen resolution, but now our unique software, **MODE-ØØ DUMP**, provides a means of outputting graphics to a dot-matrix printer at an amazing 640 x 512 resolution. All you have to do is add two simple *SPOOL statements to your BASIC or machine code program. All the VDU data used to plot the picture are then saved to disc for use later by **MODE-ØØ DUMP**. Your program can run in any MODE - even MODE 7! (although then you won't see the results until you run **MODE-ØØ DUMP**). The dump is in one colour (i.e. as MODE Ø) and covers most of an A4 page.

A useful graph plotting program is included as an example to show you how to add the *SPOOL statements to your own programs.

MODE-ØØ DUMP for BBC B, B+ and Master computers on 5¼" disc.
£12.95 disc only (state 40 or 80 track)

Please note: **MODE-ØØ DUMP** works with most dot-matrix printers, but if ESC"" is not available (check your printer manual) then you have to omit from the dump 6% of the screen height (either top or bottom).

SPECIAL OFFER: (40 or 80 track disc only)
INTERACTIVE 3D + MODE-ØØ DUMP £20.00

You can save **INTERACTIVE 3D** pictures to use with **MODE-ØØ DUMP**

PINEAPPLE SOFTWARE

Programs for the BBC model 'B', B+, Master and Master Compact with disc drive

DIAGRAM II

- now also available for ARCHIMEDES

Diagram II is a completely new version of Pineapple's popular 'Diagram' drawing software. The new version has a whole host of additional features which make it into the most powerful and yet quick to use drawing program available for the BBC micro. The new features mean that 'Diagram II' can now be used for all types of drawings, not just circuit diagrams. Scale drawings are possible and the facilities for producing circles and rubber banded lines together with the pixel drawing routines make any type of drawing possible. This advert has been produced completely using **Diagram II**.

Summary of Diagram II features:-

1. Works on all model BBC computers and makes use of Shadow memory if poss.
2. Rapid line drawing routines with automatic joins for circuit diagrams.
3. Rubber band line and circle drawing modes.
4. Makes use of the Epron GXR rom to produce ellipses, arcs, sectors, chords and flood filling.
5. Pixel drawing mode allows very fine detail to be added.
6. Defined areas of screen may be moved, copied, deleted or saved to disc.
7. On-screen cursor position indication allows scale drawings to be made.
8. Keyboard keys may be defined to print User Defined Characters allowing new character sets to be used.
9. Wordprocessor files may be loaded and formatted into defined areas.
10. Up to 880 UDC's if shadow memory available, 381 without shadow.
11. Compatible with Marconi Trackerball and most makes of 'mouse'.
12. All 'Diagram Utilities' are included.
13. Completely 'scalable' print routines allow any area of the diagram to be printed either horizontally or through 90deg. in scales that may be varied in 1% steps allowing up to 18 mode 8 screens to be printed on an A4 sheet (still with readable text).
14. Smooth scrolling over the whole area of the diagram.

Diagram II consists of a set of disc files and a 16k Epron. The disc is formatted 40T sided and 80T side2. Please state if this is unsuitable for your system, or if you require a 3.5" Compact disc

DIAGRAM II - £55.00 + vat P & P free


MARCONI TRACKERBALL

For Model 'B' and B+ (with Icon Artmaster)	£ 60.00	+ vat
For Master 128 (with Pointer Rom)	£ 60.00	+ vat
Bare Trackerball (no software)	£ 49.00	+ vat
Pointer Rom (available separately)	£ 12.50	+ vat
Trackerball to mouse adapters	£ 8.00	+ vat
Postage and Packing on Trackerballs	£ 1.75	

PCB

Pineapple's now famous PCB drafting aid produces complex double sided PCB's very rapidly using any model BBC micro and any FX compatible dot-matrix printer. The program is supplied on Epron and uses a mode 1 screen to display the two sides of the board in red and blue either separately or superimposed. Component layout screens are also produced for a silk screen mask. The print routines allow a separate printout of each side of the board in an expanded definition high contrast 1:1 or 2:1 scale. The print time is typically about 5 mins. for a 1:1 print of a 7" x 5" board. This program has too many superb features to adequately describe here, so please write or phone for more details and sample printouts.

£ 85.00 + vat Plotter driver to suit most plotters £ 35.00 +vat



PCB AUTO-ROUTING

This brand new addition to the PCB program greatly increases the power of the software and speeds the design of PCB's even more.

A list of up to 190 connections may be entered in the form of a 'rats nest' and then the computer does the rest! You may specify which side of the board you wish a track to be on or you may leave the choice to the computer, and you may also say whether tracks should be allowed to pass between I.C. pins. The program is in the form of a second Epron and full features are available on a standard model 'B'. Please write or phone for full details.

COMPLETE AUTOROUTE PACKAGE (Including manual Epron) £ 185.00 + VAT

ADFS Utilities Rom

ADU is an invaluable utility for all ADFS users. It adds over 22 new commands to the ADFS filing system as well as providing an extensive Menu facility with over 35 sub commands covering areas such as repeated disc compaction, saving and loading Rom images, auto booting of files and many more.

Copying of DFS discs onto ADFS discs can be made in one pass with automatic creation of the required directories on the ADFS disc. All functions are fully compatible with Winchester drives including BACKUP which allows backing up of Winchester's onto multiple floppies.

New commands are as follows:- *ADU, *BACKUP, *CATTAL, *CHANGE, *DFSADFS, *DIRALL, *DIRCOPY, *DIRDESTROY, *DIRRENME, *DISCEDIT, *DRIVE, *FILEFIND, *FORMAT, *KILLADU, *LOCK, *MENU, *PURGE, *PURBKR, *UNLOCK, *VERIFY, *XFORMAT, *XIFE

PRICE £ 29.00 + vat

MITEYSPICE - Powerful A.C. & D.C. circuit analyser package - £119.00 +vat
with Graphics output. Send for more details

All orders sent by return

39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL Tel 01-599 1476

VISA

Access


GEOLOGY SOFTWARE

Micro Prof

Hand Specimen Identification of minerals and rocks. Mapwork calculations. Triangular diagrams. Structural Geology and Artificial Intelligence in Geology.

Programs on cassette or disc. As used by schools, technical colleges and universities.

Details from: Micro Prof
68 Ferndown Road, Solihull B91 2BA



Whatever your subject

French, First Aid, Football, Spelling, Science, Spanish, Sport, Scotland, England, English Words, German, General Knowledge, Geography, Italian, Arithmetic, Natural History and Welsh.

Let your computer
help you learn

Write or phone for a FREE 20 page illustrated catalogue of our Leisure and Educational Software

KOSMOS SOFTWARE LIMITED

FREEPOST (no stamp needed)

DUNSTABLE, Beds. LU5 6BR

Tel 05255 3942 or 5406

Health Warning: Genealogy is Addictive

FAMILY HISTORY SYSTEM PAYROLL (Wages) ACCOUNT-PLUS

Prices: £20.52, £57.44 & £57.44 inc VAT



Micro Aid

25 Fore St., Praze, Camborne, Cornwall TR14 0JX
Telephone: 0209-831274 and ask for Colin



Put your Micro in the picture!

**ArVis
BEEB-LOCK**

We design and manufacture the most comprehensive range available of genlock and vision mixing systems for all models of Acorn/BBC micros including the ArVis audio/video interface for the Archimedes. Use our products to combine video pictures with captions, sub-titles, data and graphic images generated by your micro. Our systems are already in world-wide use by professional TV studios, educational, industrial, government and scientific establishments

VIDEO ELECTRONICS LIMITED
Wigan Rd., Atherton, Manchester M29 0RH
Tel: 0942-882332



SPEEDY DESPATCH

VISA

FREE



When you buy 25 disks (DS/DD)
for only **£18.75**
including VAT + postage

Deluxe 120 disk capacity
lockable disk box worth
over £14. (Please state if
you want the 100
capacity box instead).

FREE



When you buy 50 disks (DS/DD)
for only **£28.95**
including VAT + postage

SCHOOL ORDERS
WELCOME

Deluxe 120 disk capacity
lockable disk box worth
over £14. (Please state if
you want the 100
capacity box instead).

Alternatively buy 100 5.25" ds/dd disks certified to 96tpi
for an incredible £49.95 and get the box free!!




All disks supplied are
JAPANESE HIGRADE

5.25 DS/DD Certified to 96tpi
Subtract 5% for SS/DD. Add 10% for reversible DS/DD
Please state Japanese Higrade when ordering

with unique
5
year
Guarantee

FREE

3.5" Disk Offer



(worth £9.95)

90 Capacity Lockable
disk box for 3.5"
disks when you
buy 50 3.5" disks (or more)
or only £2.50 when you buy 25
or £4.50 when you buy 10

QTY	SS 135TPI	DS 135TPI
10	£14.95	£16.95
25	£29.95	£35.95
50	£55.95	£62.95
100	£105.95	£119.95
150	£149.95	£169.95
250	£239.95	£269.95
500	£459.95	£519.95

All disks are supplied with full user labels

FREE SOFTWARE

If you already have a disk box, you may like to choose a FREE (or cheap) program with your disks instead.
If you are buying 25 disks (£18.75) or 50 disks (£28.95) or 100 disks (£49.95) then choose any one of the programs below, paying only the price in brackets (many free!!)

Many other games in stock please phone

BBC DISC 5.25" GAMES				Special Price			
	Normal Price	Our Special Price	XOR Designer	Normal Price	Our Special Price		
Firetrack	11.70	(3.00)	S. Fox Strip Poker	11.65	(1.00)		
Pyrcastia	9.30	(FREE)	Hobbit	14.00	(6.00)	Repton II	11.65
Sphere of Destiny	9.30	(FREE)	Lord of the Rings	15.55	(8.00)	Rexs + 4	11.65
Thunderstruck 2	9.30	(FREE)	Imogen 40 Track	7.75	(FREE)	Strykers Run	9.30
Dunlunz	6.20	(FREE)	Imogen 80 Track	7.75	(FREE)	Thrust	9.30
Computer Hits Vol 2	11.65	(3.00)	Micropower Magic	6.20	(FREE)	Big K.O.	10.10
Starquake	9.30	(FREE)	Micropower Magic 2	6.20	(FREE)	Phantom	10.10
Blue Ribbon II	7.75	(FREE)	Strike Force Harrier	10.10	(1.00)	Spy V Spy 40 Track	11.65
Colossus Chess 4	11.65	(3.00)	Island of Xaan	10.10	(1.00)	Impossible Mission	11.65
Living Daylights	11.65	(3.00)	Acornsoft Hits 1	9.30	(FREE)		
Trivial Pursuit	15.55	(8.00)	Acornsoft Hits 2	9.30	(FREE)	BBC DISC 5.25" UTILITIES	
Phantom	10.10	(1.00)	Around the World	6.20	(FREE)	Mini Office II	13.20
Airwolf	11.65	(3.00)	In 40 Screens	6.20	(FREE)	DFM Database +	23.40
Commando	11.65	(3.00)	Collection Vol 1	9.30	(FREE)	Labels	
Paperboy	11.65	(3.00)	Collection Vol 2	9.30	(FREE)	Home Accounts	23.40
Cholo	14.00	(6.00)	Palace of Magic	9.30	(FREE)	Manager	13.20
Sentinel	11.65	(3.00)	Codenamed Droid	9.30	(FREE)	Transact	23.40
Yie Ar Kung Fu	10.10	(1.00)	Craze Rider	9.30	(FREE)	Admin Xtra 40	11.65
The Kat Trilogy	9.30	(FREE)	Deathstalker Interceptor	11.65	(3.00)	Admin Xtra 80	11.65
Apocalypse	11.65	(3.00)	Elite	11.65	(3.00)	Pleat St. Editor 40	31.15
Monopoly	11.65	(3.00)	Grand Prix Cons. Set	9.30	(FREE)	Pleat St. Editor 80	31.15
Scrabble	11.65	(3.00)	Ravenskull	9.30	(FREE)	Font & Graphics	11.65
XOR	10.10	(1.00)	Repton II	9.30	(FREE)	Walt Disney 40	
						(Graphics Library)	11.65

Catalogue now available, send 50p (or 30p with order) refundable

If you are not buying blank disks then you can buy any of the programs above by paying 'our normal price', (Much cheaper than retail).

ALL PRICES ARE INCLUSIVE OF POST & VAT

Nebulae, Dept. M.I. FREEPOST, Kilroot Park
Industrial Estate, Carrickfergus, Co. Antrim, BT38 7BR
Telephone (09603) 51020 (Monday to Friday 9 to 5)
7 Day delivery.



ORDER BY
PHONE FOR
SAME DAY
DESPATCH

& 14 day money back period

(09603) 51020

accept orders from all government bodies, schools, universities, PLC's etc.
We despatch on receipt of an official purchase order.

FREEPOST YOUR ORDER TODAY - NO STAMP REQUIRED

Children (of all ages) playing games on
BBC model B's?
You need:

**SOUND VOLUME CONTROL
and
HEADPHONE SOCKET**

Model B only

Easily fitted - no soldering

Price **£6.90** (incl. VAT & p&p)

From:

Cantocks Enterprises Ltd

25 Hillside Avenue, Midsomer Norton, Bath BA3 2LT

SPECIAL OFFERS EPROMS & D RAMS

27128-250N/S 21V	(While stocks last) £4.50ea
27128-250N/S 'A' 12V	£3.60ea
27128 (One time programmable)	£2.80ea
27256	£4.30 ea
2764-250 N/S 21V	(While stocks last) £2.60ea
6264-150N/S	£2.29ea
4164-150N/S	£0.99ea
41256-150N/S	£2.20ea
41257-15 N/S	(While stocks last) £2.20ea
5.25" DS/DD 96tpi	£0.55
Minimum quantity sold in 10 (supplied individually sleeved, all labels and tags with a white cardboard box for storage)	
3.5" Branded Disc DS/DD 135tpi	£1.55
3" DS/DD Disc	£3.00
20Mb Winchester Hard Disc Drive complete with WX2 Western Digital Controller Board (connection cable etc. etc.)	£299.00
8271	£38.90ea
TTL & CMOS chips (excl. DFS ROM) to be used with 8271 Disc Drive Controller	each set £2.50
WD1772	£13.50ea
2732	£2.20ea
2716	£2.50ea

All prices include P&P
Send your order by post with cheque or postal order. Or phone through your order by quoting your Access number

HOT LINE

24 Hrs Service 01-550 6514 24 Hrs Service

Please phone for special price on bulk purchase
If any products purchased from this advert fails to give complete satisfaction. Please return to us unused within 30 days for a full refund or free replacement. This guarantee is offered in addition to your statutory rights.

No VAT is charged (Not VAT Registered)
We reserve the right to increase prices without prior notice

J & J MICROCHIPS LIMITED
PO Box 18, Essex IG8 0RB

Co. Reg. No: 1965704

DELTA COMPUTERS

BBC MASTER SERIES

Archimedes	Ring for price
Master 128	£395.00
Master Compact Entry	
System	£349.00
Master Compact Colour	
System	£555.00

OPUS DISC DRIVES

5802 400K DS DD	
40/80T.	£104.95
5802DB Dual 800K	
40/80T.	£204.95
5802D as 5802DB+PSU	£234.95
Opus DDOS (With a drive)	£40.00

PRINTERS (inc lead)

Citizen 120D	£169.00
Star NL-10	£237.00
Panasonic KX-P1081	£169.00
Amstrad DMP3000	£179.00
Amstrad DMP3160	£199.00

PRINTER RIBBONS

Brother M1009	£3.25
Canon PC1080A	£3.25
Epson FX,MX,RX 80	£2.70
Epson LX80, LX86	£2.70
Epson FX, MX, RX 100	£3.35
Panasonic KX-P1081	£3.99
Citizen 120D/LSP10	£4.60
Citizen MSP10,20	£2.70
Citizen MSP15,25	£3.25
Kaga 810	£3.25
M Tally MT80	£3.50
Seikosha GP100/250	£2.65
Shinwa CP80	£3.50

SPECIAL OFFERS

Tatung Std. Res. Col. Monitor	£169.00
Acorn Med. Col. Monitor	£239.00
Philips 8833 Col. Monitor	£259.00
Brother HR5 Printer	£69.99

All orders over £100 receive free Touchpad for BBC B (only).
Worth £49.95 (while stocks last).
MINIMUM ORDER £10.00

All prices include VAT

Please add £5 carriage on orders over £100
Mail Order only at this address
Trade and Educational enquiries welcome

85 Union Street Oldham Lancs

061-626 3841

banana
D I S K E T T E S

Available through selected

W H SMITH & JOHN LEWIS stores

Plus the following specialist computer shops:-


ENGLAND Enthusinet U.K. agents Tel:(04536)4310 J S Churchill Buckinghamshire Wordmongers Ltd Aylesbury Tel:(0296)437878 Henry Webster Cambridgeshire Wisbech computer services Ltd Tel:(0945)64146 Ian Duffy Cornwall Helston Computer Centre Helston Tel:(0326)563765 Mr C Harmer Cumbria Cumbria Software Systems Ltd Tel:(06977)3779 Devon Devitt Electronics Barnstaple Tel:(0271)75242 Mr J P Devitt • T A Computer Services Exmouth Tel:(0395)266814 Tony Ayling Dorset Tiger Software Bridport Tel:(0308)27691 Terry Gilbert Durham Desktop Durham Tel:(0388)767244 Duncan Routley Hampshire Timatic Systems Fareham Tel:(0329)239953 Mr. Young • WeServe Portchester Tel:(0705)325354 Kelvin Hertfordshire Melmark Microsystems Hertford Tel:(0992)554469 N J Tobin Kent Canterbury Computer Centre Canterbury Tel:(0227)462101 David Jones • Computers Plus Sittingbourne Tel:(0795)25677 A Francis • Gravesend Computer Centre Gravesend Tel:(0474)323871 Lynne Baxter • Kent Micro Computers Ltd Maidstone Tel:(0622)52784 Frank Smith • Lighthouse Computer Services Deal Tel:(0304)362049 Marion Reynolds • Romar Computers Ltd Ashford Tel:(0233)45119 • The Village House of Computers Bromley 01 460 7122 Mr C V Gee Lancashire Castle Computers Ltd Lancaster Tel:(0524)61133 Dave Smith • Computer Games Shop Blackpool Tel:(0253)48738 Jim McEvoy • Computer Systems Bolton Tel:(0204)794063 Frank Hunter • Elm Computing Cleveleys (0253)852882 Pete Wood • Time Computers Blackburn Tel:(0254)63414 Asif Sadiq London Electrosound Acton 01 740 8666 Phil Walsh • Micro Anvika W1 Tel:01 636 2547 A Gohil • Wida Software W5 Tel:01 567 6941 Tony Williams • Rensoft SW16 Tel:01 677 0569 Richard Butler Middlesex Instant Computer Supplies Hounslow Tel:01 897 1534 John Sims Midlands Mr Disk Warley Tel:021 420 1360 J Guest Norfolk Computer Plus (Kings Lynn) Tel:(0553)774550 D J Farrow Oxon Brookwood Computers Ltd Kidlington Tel:(08675)5468 • Oxford Computer Supplies Tel:(0865)716137 Terry Cummings Staffordshire Miles Better Software Cannock Tel: (05435) 3577 Robert Miles Surrey Statacom Computers Sutton Tel:01 661 2266 R Suri • Farnham Computers Farnham Tel:(0252)723107 Sussex CJE Micros Worthing Tel:(0903)213361 Chris Evans • Independent Software (0273)453568 Peter Worley Tyne & Wear Northern Business Centre Ltd Gateshead Tel:(091)4825421Yorkshire Ashdown Computers Huddersfield Tel:(0484)510776 S Fisher • P C Electronics (Yorkshire) Ltd North Humberside Tel:(0405)768320 P Cliff • Wise Owl Software Wath-Upon-Deane Tel:(0709)872703 Bob Lees **SCOTLAND** Almac Stirlingshire Tel:(0324)482435 Alistair McIntyre • Vics Perth Tel:(0738)36704 David Vicary • Microscot Computer Consultants Dundee Tel:(0382)200869 Tony Paterson **WALES** Posi-Tron Computing Dyfed Tel:(0554)759624 **NORTHERN IRELAND** Computall Ltd Belfast (0232)644927 David Weddell • TC Computing Services Co Londonderry Tel:(0265)53155 John Trott

WE ARE STILL LOOKING FOR MORE OUTLETS

DISKING™
I N T E R N A T I O N A L

1 Royal Parade Hindhead Surrey GU26 6TD
Tel: (042 873) 4834 Retail • 4934 Wholesale
Fax: (042 873) 6676 • Twx: 858623 Telbur G

GO BANANAS?

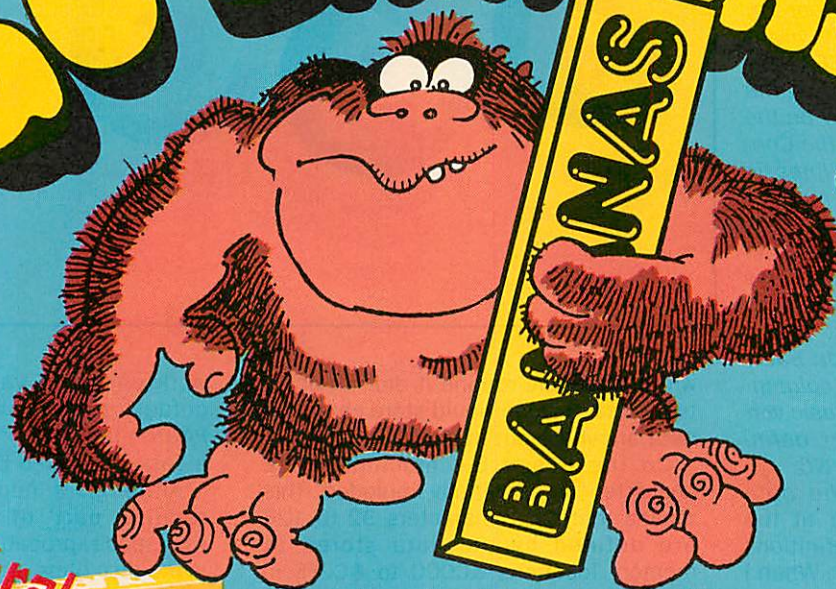

Grab yourself a FREE puzzle with every purchase of 20 Banana Disks (5 $\frac{1}{4}$ " or 3 $\frac{1}{2}$ ")



With every twenty 5 $\frac{1}{4}$ " or 3 $\frac{1}{2}$ " disks, our new banana puzzle comes absolutely FREE. Drive everyone bananas with these excellent presents, and when you finally go crazy, call us for the solution. Order by 'phone, fax or post with confidence as we promise:- • Immediate despatch* • Lifetime warranty - on ALL disks • Money refunded if not highly delighted *stocked items

Official orders from plcs & Government bodies are welcome.

DISKING™

FREEPOST Hindhead Surrey GU26 6BR
Telephone (042 873) 4834/4934
Fax (042 873) 6676 all 24hr

ORDER FORM

	exc VAT	QTY
BANANA Ten 5 $\frac{1}{4}$ " disks D/Sided 48/96 tpi Reversible disks	8.65	_____
BM2D Ten D/S D/Dens. 135 tpi 3 $\frac{1}{2}$ " Microdisks	17.35	_____
SLIM 5B Banana Library box for ten 5 $\frac{1}{4}$ " disks	1.50	_____
SLIM 3B Banana Library box for ten 3 $\frac{1}{2}$ " microdisks	1.00	_____
Banana Puzzle FREE with every 20 disks (5 $\frac{1}{4}$ " or 3 $\frac{1}{2}$ ")	FREE	_____
FREE offers are subject to availability		
Goods Total exc VAT		
U.K. Delivery (see below) exc VAT		
Sub Total exc VAT		
V A T @ 15%		
Value of cheque payable to Disking		

OR Please debit my ACCESS/VISA No: _____

Name/Company: _____

Address: _____

Tel. No: _____

U.K. P&P exc VAT (disks/microdisks)

10-20 disks 95p/ten • 30-50 disks 75p/ten • 60-90 disks 60p/ten • 100+ disks FREE

Discover the inner secrets of arcade games with...


To follow last month's *Airwolf* feature, here is a conversion for the main machine code loader file – WOLF2 – so that the defined characters used on the title page are displayed correctly on the Master, without needing to use the Convert program. Simply add the lines in this month's Listing I to last month's Listing I.

This routine reads the data stored in pages &23 and &24 – memory locations &2300 to &24FF – and outputs it as VDU23 character definitions. It's a machine code version of the short Basic routine published in last July's column. The only difference is that the Basic version only issued the character definitions from data stored in page &C.

This routine converts all the data starting at page and finishing at the beginning of page end into definitions for characters starting with char. When I

```
45 oswrch=&FFEE:char=&A0:page=&23:
end=&25
63 LDA#char:STA &70:LDA#0:STA &71:
TAY:LDA#page:STA &72
64 .nextchar LDA#&17:JSR oswrch:LD
A &70:JSR oswrch
65 LDX#&08:.loop LDA (&71),Y:JSR o
swrch:INY:DEX:BNE loop
66 INC &70:CPY#0:BNE nextchar
67 INC &72:LDA &72:CMP#end:BNE nex
tchar
```

Listing I: *Airwolf* title screen modification

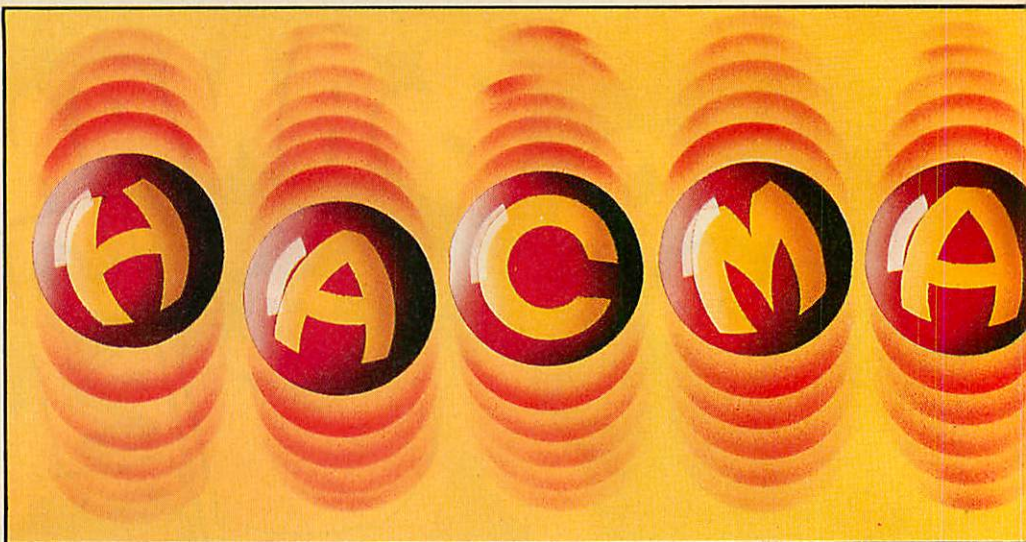

wrote the Basic routine it did not occur to me that anyone would store character data anywhere but page &C...

On the B and B+ machines, the character font is initially imploded. This means that Ascii characters 32 to 126 are defined by the data stored at memory locations &C000 to &C2FF in the Mos rom, and characters 128-255 are undefined.

Of these last 128 characters, up to 32 – characters 128 to 159 – can have definitions assigned to them. Each definition takes eight bytes, so 32 would take 256 bytes – one page of memory. The page used for storing these definitions is &C.

On all Acorn machines the OS variable OSHWM points to the lowest page in memory that is free after all hardware and software expansions have claimed

workspace. Its value is used for the default setting of the Basic variable PAGE – the start of a Basic program. On a cassette-based BBC B, PAGE is &E00.

Although a number of expansions require part of the user ram as workspace, probably the most important is the disc filing system. Adding a DFS to a BBC B pushes PAGE up to &1900. The B+, which has the DFS supplied as standard, already has PAGE set to &1900. As previously mentioned, the B and B+ allow for 32 redefinable characters, for which one page of memory is reserved.

We can increase this number – 32 characters at a time – by reserving further pages of memory, using the *FX20 call. In technical jargon, this is called exploding the character font. We can issue the command *FX20,1 to reserve

Going Craze on a BBC B

I often feature routines to convert games written for the BBC B to run on the B+ and Master. Regular readers may remember a routine from last May's column that converts the Master version of the hugely successful *Stryker's Run* to run on a suitably expanded BBC B.

Although *Stryker's Run* was the first game to feature a version specifically for the Master, a few others have followed in its footsteps.

Kevin Edwards' *Craze Rider* is one such game, with a six-minute musical accompaniment, demo mode and enhanced graphics.

I was, therefore, very pleased to receive a routine from Gavin Long of Ton Pentre, Mid-Glamorgan to allow the disc version to be used on a BBC B with the Solidisk Fourmeg ram board. Enter Listing II and save it on your own blank disc as Convert. Then insert the *Craze Rider* disc and type:

```
LOAD"MENU"
200 GOTO 270
270 PAGE=&1100:CHAIN"CONVERT"
```

Delete lines 10 and 70 and save this file as CRAZEE on your own disc.

Then type:

```
CHAIN"CRAZEE"
```


There will be a few disc accesses and then a blank screen. Insert the original *Craze Rider* disc and press any key. The Master version of *Craze Rider* will now load and run. Thank you very much, Gareth.

One problem with the Master ver-

sion of *Stryker's Run* is that it was written using the extended 65C02 op-codes and will not run on a standard 6502. However, Kevin Edwards assures me that he has not used any 65C02 codes in *Craze Rider*. It should therefore be possible to convert the Master version of *Craze Rider* to run on other systems with at least 64k of sideways ram.

```
10 REM Craze Rider to Solidisk 4M
20 REM By Gareth Long
30 REM (C) The Micro User
40 REM
50 ON ERROR GOTO 100
60 A=GET:*INIT
70 *RUN 0.EMU6845
80 HIMEM=&787F:LOMEM=&6700:FE32=
8:*LOAD MCRLOAD
90 ?&51A=8:FE51D=832:FE540=832:FE5
B9=&9B:CALL 8500
100 *LOAD MCRIDER
110 ?&499=&60:CALL 8400
120 P%=&D88:COPT 0:STX FE32:STX FE
E30:RTS:]
130 P%=&D78:COPT 0:STA FE32:STA FE
E30:RTS:]
140 FOR A=1 TO 13:READ J%:PROCconv(
1,J%):NEXT READ J%:PROCconv(2,J%)
150 ?&1B4E=9:FE1B61=9:FE1B9E=9:FE1B
DD=9:FE1BB3=9:FEA06=10:FE1C27=10:FE20
2A=8:FE206A=11:FE2089=8:FE209F=11:FE2
36F=8:FE240D=8:FE2430=8:FE2627=8:FE26
51=8
160 CALL 8664B
170 END
180 DEFPROCconv(I%,J%):IF I%=1 THEN
?J%=&20:?(J%+1)=FE78:?(J%+2)=FE8D ELSE
IF I%=2 THEN ?J%=&20:?(J%+1)=FE88:?(J%
+2)=FE8D
190 ENDPROC
200 DATA &A09,&A1E,&1C2B,&202E
210 DATA &206E,&208D,&20A3,&2373
220 DATA &2411,&2434,&262B,&2655
230 DATA &2EC0,&2EB5
```

Listing II: Conversion for *Craze Rider* to Solidisk 4Meg board

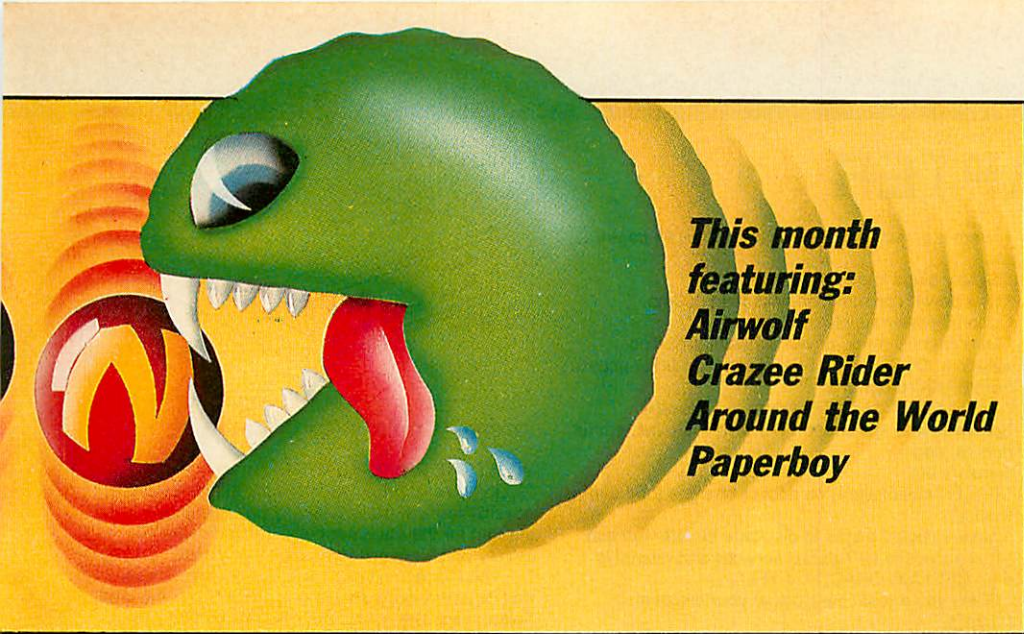

**This month
featuring:
Airwolf
Crazee Rider
Around the World
Paperboy**

SERIES

B**B+****m****cm**

the two pages of definitions data and issues the necessary series of VDU 23 commands.

Incidentally, Elite's **Paperboy** – by the same author – also features this illegal method of generating defined characters on the title page. Fortunately, the fix is just as simple. Enter last month's Listing I, add this month's Listing I, delete lines 70, 80, 100, 110, 120 and 130 and change line 140 to read:

```
140 .cli EQU$'LOAD PAPER'+CHR$13
```

Paperboy's character definitions are stored in pages &22 and &23, so you must also change the values of *page* to &22 and *end* to &24. The title page will now be correctly displayed. Many thanks to Chris Hardcastle for the loan of Paperboy to check the above.

I've been hacking away for *The Micro User* for a year now and I'd like to thank you for the letters and contributions you've sent me. Although I try to answer every query or request for help, I can't undertake to do so if I don't receive a stamped addressed envelope.

Next month's column will include a full solution to Superior's excellent Codename:Droid. Until then, play on!

one page, allowing us to redefine characters 160 to 191.

The command *FX20,6 fully explodes the character font, allowing all characters from 32 to 255 to be redefined. The side effect is that we lose six pages of memory, pushing OSHWM – and therefore PAGE – from, say, &1900 to &1F00.

Acorn has always said that the *only* legal way to issue character definitions is by VDU 23,x,... However, on the B and B+ machines any data stored in page &C is automatically converted into character definitions. Many commercial games cut corners by transferring data directly into page &C, in the knowledge that the operating system would do the rest.

Some, such as Hunkidory and Starship Command, have more than one set of definitions – one set for the game and one for the high score table, for example – which are simply transferred into page &C as needed. The method itself is illegal in Acorn's eyes – but until the advent of the Master there was never any reason to suspect that it would ever fail to display the characters correctly.

When the character font of the BBC B or B+ is exploded, all pages allocated for character definitions operate in the same way as page &C. Any data loaded into them will automatically become character definitions.

As an example, on a disc-based BBC B or B+ we can issue the command *FX20,1 to allow Ascii characters 160 to 191 to be defined. This pushes OSHWM up from &1900 to &1A00. If we then *LOAD a 256-byte datafile at &1900 and examine characters 160 to 191, we will find that they now have the definitions given by the data in the page starting at &1900.

Equally, if we *LOAD the same data at &1900 and then issue the command *FX20,1, we will achieve the same result. We have arrived at the heart of Airwolf's problem.

The exact technique used by Airwolf to display the title page characters is very clever, and it is most unfortunate that it does not quite conform to legal Acorn compatibility rules.

The main machine code loader file,

incorporating the title page – WOLF2 – loads at &1960. The data for the character definitions is stored in the two pages &23 and &24. As we have seen, when the character font is exploded, the pages immediately above OSHWM are reserved for storing the definitions for the new redefinable characters. Airwolf actually resets OSHWM to &2300 and then issues the call *FX20,2, thereby defining characters 160 to 223.

The Master series doesn't work in this way. The character font of these machines is fully exploded on start-up, using seven pages of the private Mos ram. Therefore any attempt to generate defined characters by direct manipulation of the main user memory will fail. To cope with this different setup, the machine code routine in Listing I reads

Around the World passwords

Around the World in Forty Screens has attracted a lot of interest so here, at last, are all the passwords.

They've been a long time in coming because I am honour-bound not to give more than brief details of any game that has a competition running. Many thanks to everyone who has written in with the passwords: I'm sorry that I cannot mention names, but I'd fill up the whole column without mentioning anything else.

I was very surprised to see how quickly I received the passwords: Are

you all sure you didn't cheat?

Further to my fix for the bug in the first release of Forty Screens, Stephen Willetts and James Walsh have written to me to ask if there are any other bugs – they're both stuck on screen F of America.

I can say for certain that there are no bugs on this screen: Apart from anything else, I've completed it myself. Steve Botterill of Superior assures me that the Orient bug is the only one in all the releases of Around the World. Keep trying!

	America		Arctic		Orient		Oceans		Africa	
Screen	Password	Edit code	Password	Edit code	Password	Edit code	Password	Edit code	Password	Edit code
A	AMERICA	52463	ARCTIC	25363	ORIENT	10019	OCEANS	34645	AFRICA	53997
B	CURTAIN	57036	DIAMOND	20049	THRUST	47727	MAGENTA	44892	WELCOME	54996
C	VAMPIRE	2457	RUBBISH	44028	COLONEL	29389	ELECTED	15334	WORKING	36857
D	CREATED	2560	MANAGER	10455	PERSONS	29842	DISEASE	14536	FIREMAN	13942
E	LUNATIC	16961	PACKAGE	18279	CRICKET	48573	THEATRE	14089	KESTREL	25155
F	MAXIMUM	15699	PRIVATE	43587	TUNNELS	13365	DREAMER	16710	REFRACT	26421
G	COMPOSE	56696	CAPITAL	8380	INTENSE	34674	CURRENT	55886	ADDRESS	39304
H	COLOURS	10568	DUNGEON	21510	GALLERY	36424	GENERAL	13003	RECEIVE	51901

TELETEXT ADAPTER

Would you like access to free high quality software and over a thousand pages of information, but Prestel access charges and phone bills too expensive? Then read on!

The answer is Teletext. Yes the same system everyone has seen incorporated into television sets, but with a difference. When Teletext is read by a computer you can actually use the data. The MORLEY TELETEXT ADAPTER introduces you to the world of Teletext at a price that won't break the bank. Inside it you will find the latest in second generation Teletext chip technology, which unlike our rivals who are still using chips designed more than ten years ago, will be fully compatible with any future advances in the Teletext system.


With the Morley adapter you will get a state of the art unit that automatically tunes itself into the required station (no more messing around with screwdrivers or twiddling little knobs in the back of the case), a user friendly menu driven program, easy to follow instructions and a 12 month warranty. Add to this the free downloadable telesoftware and we are sure that you will agree that we are offering you one of the best bargains on the market today.

FEATURES:

* Advanced design uses the latest technology, will handle ANY future enhancements to the Teletext

system e.g.: full field; 8 bit data transfer; 2k pages etc.

- * Simply plugs into the user port.
- * Low power consumption, less than 200ma.
- * Optional power supply available.
- * User friendly menu driven software including extended OSCLI and OSWord commands for access from BASIC programs.
- * Supplied with 16k ATS (Advanced Teletext Software) and 16k support ROM software inc. printer dumps, page spoolers etc.
- * FREE Telesoftware, no access charges (updated weekly).
- * Save selected pages to disc/tape for later retrieval.
- * Full access to all Teletext services and channels e.g.: CEEFAX, ORACLE, 4-TEL.
- * Gives you a real-time clock at your disposal (*TIME).
- * Software upgrades to allow for any enhancements to the Teletext service, e.g.: extra channels, full field data on cable & satellite systems etc. (only the media charge).
- * Easy to follow comprehensive user guides.
- * No hardware limitations, it can for example receive virtually unlimited numbers of channels.
- * Util disc available including printer drivers allows pages to be selected and dumped direct to a printer

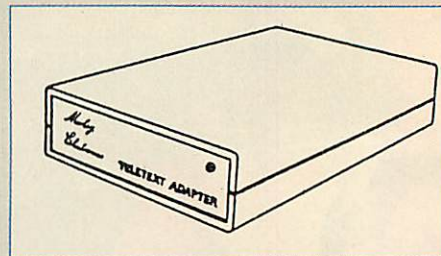

(no more TV or Radio Times to buy).


WHAT THE REVIEWERS SAID:

"... In terms of price, performance, future expansion possibilities and those little touches that show thought for the end user I would recommend the Morley unit."—(Acorn User, January, 1986).

"... The Morley unit has been designed to ensure that its operation is simple and smooth. It is the ideal Teletext adapter for school use."—(A&B Computing, June, 1986).

"... Using it over a number of months in different schools, it has proved utterly reliable, and may confidently be recommended."—(The Times Educational Supplement, September, 1986).

THIS IS THE BIGGEST SELLING TELETEXT ADAPTER CURRENTLY IN PRODUCTION WORLDWIDE, AND COMES WITH A FULL MONEY BACK SATISFACTION GUARANTEE.

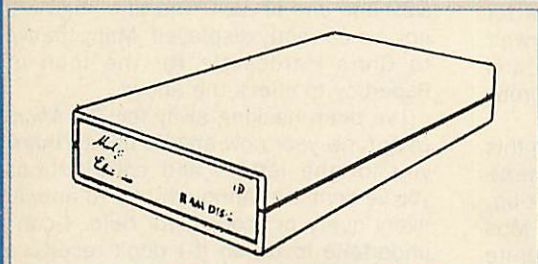

Now available!
The first true MEGA capacity RAMdisc for the BBC, BBC B+ and MASTER computers. This fully compatible unit, currently available in either 1 or 2

megabyte versions comes complete with operating software on ROM, power supply, and a comprehensive user guide.

FEATURES:


One megabyte of RAM connected to the 1MHz bus. Used with the supplied ROM software programs and files may be saved and loaded from the RAMdisc in the same manner as from a floppy disc with a large increase of speed, for example, a 20k mode 0 screen takes about 3-4 seconds to load from disc and about 0.2-0.3 seconds to load from the RAMdisc. The RAMdisc ROM operates as a utility ROM

RAMDISC

working with the current filing system rather than as a separate filing system. Therefore ensures compatibility with any Acorn compatible DFS (not ADFS). The RAMdisc can be selected by a * command to take the place of any drive number from 0 to 9. If the RAMdisc replaces a floppy drive as 0 for example, all commands addressed to drive 0 will be intercepted by the RAMdisc. The default drive number is 4. Any 'Dangerous' * commands such as *COMPACT, *COPY, *BACKUP etc can be intercepted and the BBC's RAM from page 2 to &7FFF saved to RAMdisc workspace, and may be recovered using a *command. This prevents accidental corruption of any programs/data in RAM you may have been using at the time. The filing system wedge ROM supplied supports load/save, byte file access, all relevant OSFSC commands, and contains a formatter verifier and 'sector' editor for use with the RAMdisc. Catalogue structure allows up to 2,688 files.

Well that's the spec., add to this our usual 12 month no quibble guarantee and we're sure you'll agree the Morley RAMdisc is the sensible alternative if increased storage capacity and speed is your requirement.

EPROM PROGRAMMER V2

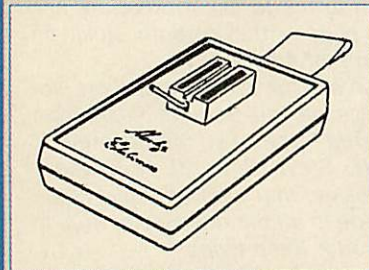

The MORLEY EPROM PROGRAMMER V2 is a small self contained unit that plugs into the BBC or MASTER user port. It comes with a high quality ZIF (zero insertion force socket) and contrasting plastic case. Also included in the package is it's own user friendly menu driven software on ROM or disc. This state of the art unit, allows programming of 2764 (8k), 27128 (16k), and 27256 (32k) EPROMS. Not only does the hardware allow

programming of the usual NMOS devices, but will handle the new generation CMOS equally as well, and with the average time taken to program a 16k at less than 30 seconds we believe it to be one of the fastest programmers available today.

THE HARDWARE

The Unit is completely under software control, there are no knobs or switches to baffle the novice, and the extended features provided should excite the pro's.

THE SOFTWARE

The comprehensive user friendly software included in the package has two main parts, the first allows EPROMS to be read, programmed, verified and edited, also allowing a ROM image to be loaded or saved to disc. The second is a full ROM management system in its own right, which has a host of useful features and routines, such as KILL and RESURRECT ROM to disable or enable a sideways ROM, dump ROM image to buffer or disc, move ROM image in buffer to sideways RAM, and VIEW-SEARCH any sideways ROM.

The whole system is available now for less than the price of one WORDWISE chip. So get yourself the all new MORLEY EPROM PROGRAMMER V2 today and start using those expansion boards for what they were made for! ROMS. Immediate delivery no quibble 12 month guarantee.

MASTER CARTRIDGE

Designed and manufactured by Care Electronics to Acorn specifications. These high quality Master expansion cartridges will take two 16k sideways ROM's, and will, unlike similar cartridges available from other manufacturers, accept the new second generation programs, such as Computer Concepts Interword and Spellmaster ROM's. These Cartridges come in a high quality, robust, formed-plastic case, that fits neatly into either one of the Master's cartridge slots.

MASTERSMART CARTRIDGE

This device was designed and manufactured jointly by Morley and Care Electronics.

The Smart cartridge will at the press of a button halt any program running in memory and execute any one of a host of useful built in, or user defined procedures, and once completed will return to the program and continue where it left off. The only limiting factor with this device is the programmers imagination. The Smart cartridge will prove useful to the novice, allowing him to do the simple things like dump any screen to printer, and make backups of protected tape or disc based software, but has an open ended specification for the advanced 'HACKER' allowing advanced programming techniques to be incorporated into almost any program at the touch of a button.

BUILT IN FEATURES (at the press of a button)

- Autosaves computer's entire memory.
- Freeze program at any point.
- Screen dump (any mode) to printer or disc.
- Allows any OSCLI command without disturbing memory.
- Copies 90% of protected software.
- Tape to disc, disc to tape.
- User friendly menu.
- Sound On/Off.

ALL CARTRIDGES COME WITH A 12 MONTH NO QUIBBLE WARRANTY

NEW
PRODUCT

MORLEY MASTER BOARD 'AA'

At long last the add-on all MASTER users have been waiting for, an internal ROM board.

No more need to turn the computer off to insert the cartridge containing the ROM you need to debug the program in memory.


The new MORLEY MASTER BOARD "AA" allows you to have up to 8x16k and 4x32k extra Roms installed inside your MASTER and still leaves the cartridge slots free. This in effect allows your MASTER to support as many as 24, 16k ROMs installed permanently, whilst retaining the standard 4 x sideways ram banks and four banks by using cartridges.

A staggering 32 ROM Images Installed and accessible at any time

Included in the package is a utility ROM which has many useful features such as 'FICOPY', a clever file transfer program that transfers files between DFS and ADFS formats or vice versa.

So for less than the price of four external cartridges you get a MASTER BOARD "AA" which with twice the capacity has got to be THE ROM expansion for the serious MASTER user.

The unit comes with the usual Morley, full no-quibble twelve months warranty, and our usual after sales service

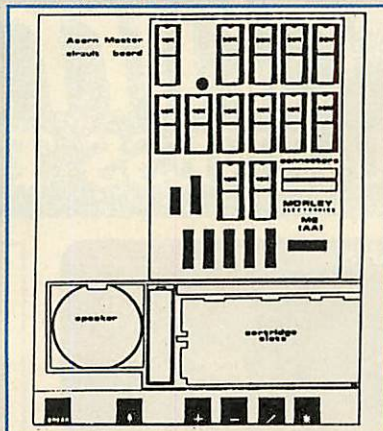

MORLEY
ELECTRONICS



Unit 3, Maurice Road Industrial Estate,
Wallsend, Tyne & Wear NE28 6BY
Telephone: Tyneside (091) 2627507
Telex: 265871 A/B MONREF G
(Quoting Mag 70211)

THE COMPLETE RANGE OF TELETEXT SOFTWARE from M/B SOFTWARE

***NEW... DESIGN 7 PLUS** - now 'the best' is even better. Held in high regard by reviewers and hundreds of satisfied owners, DESIGN 7 has been further improved, with revised keystrip & even more features. Design/load/save and MODE 7 screen with ease, up to full CEEFAX/Oracle standard. Will convert ANY MODE 7 screen to a BASIC procedure, for inclusion in your own programs. ROM version includes a file copier, printer dumps useable from BASIC etc. B/MASTER/COMPACT.

TELETEXT EMULATORS/SCREEN DISPLAYS/INFORMATION SYSTEMS - A complete range of teletext programs to cater for all needs, with full teletext adapter interfacing.

***NEW... DESFAX** - totally new version - streets ahead of the competition - run your own information/display system. Stores hundreds of screens on dual 80 track drives (96 screens on single-sided 40 track), with access to any screen with a SINGLE KEYPRESS. Lots of special effects - screens can scroll, slide, overwrite etc. Animation, loops, subroutines - send for details - not enough space here to even begin to describe the advanced features!! B/MASTER/COMPACT

***NEW... MASTERFAX** - 84 MODE 7 screens in memory at once. 148 screens possible with cartridge RAM. An advanced teletext/carousel program featuring SINGLE KEYPRESS or 3-digit page selection. Runs entirely from memory - no disc accesses after pages are loaded. Superb animation and other effects. MASTER/COMPACT only.

***NEW... VU-FAX** - 1000 screens and no disc accesses! Screens stored on MORLEY 1MByte RAM DISC. SINGLE KEYPRESS gives instant access to any screen (or emulate teletext). This is the ultimate MODE 7 screen management system - there is nothing else like it. MODEL B/MASTER 128.

***ALSO... MASTERcopy** - DFS/DFS, DFS/ADFS, ADFS/DFS, ADFS/ADFS file copier. Uses the MASTER 128's memory to the full to permit fast disc copying. 31 DFS files to ADFS disc in less than 2 minutes. Creates directories automatically. You will wonder how you ever managed without this program. Described by reviewers as 'unexcelled'. MASTER 128 and COMPACT's fitted with DFS ROMs.

ORDER FORM

To order simply complete and return by post enclosing your cheque/P.O. made payable to Morley Electronics, or by phone during office hours, quoting your ACCESS or VISA number.

Morley Electronics, Unit 3 Maurice Road Industrial Estate, Wallsend, Tyne & Wear NE28 6BY Telephone Tyneside (091) 2627507.
Telex: 265871 A/B MONREF G (Quoting Mag 70211)

ALL PRICES INCLUDE VAT @ 15%

	P&P Rate		P&P Rate
Qty. _____ Morley Teletext Adapters	119.95 (a)	Qty. _____ M/B Software Design 7+	9.95 (c)
Qty. _____ Optional Power Supply	9.95 (b)	Qty. _____ M/B Software Desfax	19.95 (c)
Qty. _____ Teletext Utilities on disc	5.95 (c)	Qty. _____ M/B Software DesROM	12.95 (c)
Qty. _____ 1 Megabyte RAMdisc	199.95 (a)	Qty. _____ M/B Software Mastercopy Disc	12.95 (c)
Qty. _____ 2 Megabyte RAMdisc	349.95 (a)	Qty. _____ M/B Software Mastercopy ROM	14.95 (c)
Qty. _____ Eprom programmer V2	34.50 (b)	Qty. _____ M/B Software Masterfax	29.95 (c)
Qty. _____ Master ROM boards "AA"	45.95 (b)	Qty. _____ M/B Software VU-Fax System inc RAMdisc	249.95 (a)
Qty. _____ Master RAMdisc/SWR cartridge	P.O.A.	Qty. _____ 5.25" Floppy discs x 10	7.95 (c)
Qty. _____ Care Master ROM cartridges	8.95 (b)	Qty. _____ 27128 16k CMOS EPROM	3.65 (d)
Qty. _____ Master Smart cartridge	39.95 (b)	Qty. _____ Info Pack + Demo Disc of all Software	FREE (c)

Please delete: Adapter software on ROM/Sideways RAM format/Software on 40/80 track disc

Name _____ Phone no. _____

Address _____

Post Code _____

Cheque No. _____ Access/Visa No. _____


Amount £ _____

Please add Postage and Packing @ a=£3.00 b=£2.00 c=£1.00 d=£0.65 (when ordering more than one item, add P&P. on highest rate item only)
GOVERNMENT, LOCAL AUTHORITY, AND TRADE ORDERS WELCOME. Please allow 28 days for delivery



archimedes

HARNESS THE POWER

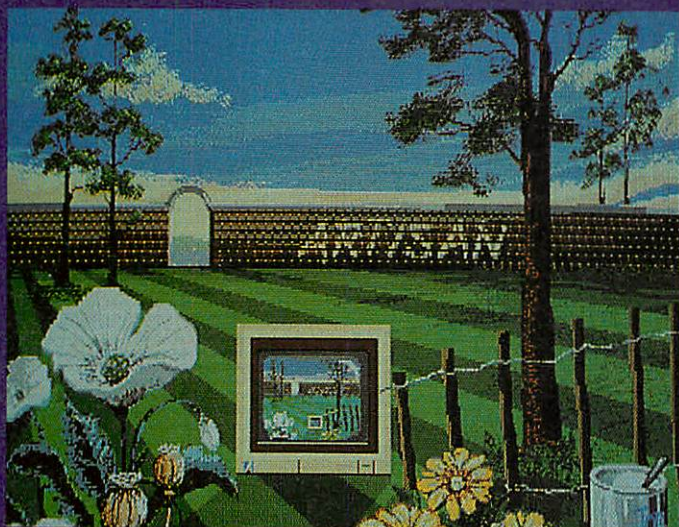

A computer like ARCHIMEDES needs software that can match its outstanding capabilities. Our new products do just that and one of the first areas that you will want to explore is the graphics capability. ARTISAN, from the authors of ARTROOM, is the ultimate in graphics packages. Just take a look at the screen shot reproduced here, as they say 'a picture is worth a thousand words'. We can't describe all the features here but some major functions are:

- Full screen
- Fast multi level scrolling zoom
- Image distortion
- WIMP environment
- Magic brush
- ECF designer

Plus all the usual features and some very unusual ones too.

£39.95

—COMPETITION—

PICTURE THIS

Can you do better than the picture shown here? If so you could win yourself a unique prize. If yours is judged to be the best picture then your masterpiece will be transferred to canvas by our artist Jon Warmisham (BA Hons Fine Art). The competition is open ended but the best picture each month will be featured in ACORN USER and a monthly prize will be awarded. Full details are contained in the ARTISAN pack.

Alpha-Base

Alpha-Base is the successor to the hugely successful Beta-Base, the top selling database for the BBC micro. Beta-Base files can even be transferred to Alpha-Base.

Alpha-Base incorporates all the suggestions and requests that we have received over the last five years. All of the standard Beta-Base facilities are there but in a much improved form. In addition there are many new features that will make your life easier. Some of the features are:

- Free format screens
- Multiple pages per record
- 400 fields & 27,600 characters per record
- 2.14 billion records per file
- Multiple display & entry forms
- Fast search & sort options
- Plain English entry of search criteria
- Five data types including formula & date
- Winchester compatible

At Clares we try to give you usable programs. This results in some arbitrary limits on the size of files in Alpha-Base. The limits of 400 fields and 27,600 characters per record are unlikely to restrict you but they enable us to save memory and provide additional features. The only other limitations are due to the hardware. Alpha-Base can handle 2.14 billion records but the ADFS can't!

£49.95

IMAGE WRITER

IMAGE WRITER is a sophisticated WIMP based wordprocessor with the ability to include graphics as well as to use various font combinations. Because Image Writer is document based you do not have to create page layouts for every page. You prepare your whole document in one go. Just type it, add the graphics and print it—simple. The graphics can be created with the built in graphics editor. Image Writer is designed as a first level DTP product and it uses the normal printer fonts to print both text and graphics in one pass. We will of course be producing a full feature DTP when ARCHIMEDES supports the fancy font printing. Image Writer will be available when you read this so please contact us for more information.

£29.95


ARCHIMEDES TOOLKIT MODULE

ATM is the first toolkit available for this powerful new micro. Many of the features that made RAMROD a top seller have been incorporated into ATM and a whole host of new features have been added including:

- 10 Memory and disc editors
- 8 Memory and disc searches (inc. wildcards)
- A scrolling disassembler
- A one line assembler (accessed from the disassembler)
- Shift and compare functions
- Catall and Exall for discs
- Winchester compatible

If you want to explore your ARC then order the ARCHIMEDES TOOLKIT MODULE today. It has enabled us to disassemble modules, discover many undocumented SWI calls and has been an invaluable aid in debugging software. You can even search for mnemonics.

£39.95



Archimedes is a trademark of Acorn Computers Ltd

**ALL PRICES INCLUDE VAT and P+P
OVERSEAS ORDERS ADD £4**



DON'T FORGET, YOU CAN ORDER WITH ACCESS CARD TOO!

**98 Middlewich Rd Northwich
Cheshire CW9 7DA Tel: 0606 48511**

THE inhabitants of the far off planet of Boswyte have just repelled an attack from the evil Leaks, but unfortunately their pipes suffered terrible damage. However, the plumbing droids are on hand to effect repairs rapidly before the problem gets out of hand.

Their task is quite simple — to repair the pipes before the pressure build-up becomes too much. Apart from the time limit, some of the terrible Leaks are still lurking among the joints and will teleport the plumbing droid back to his starting position on contact.

To fix the pipe, move the plumbing droid around the screen picking up the pieces of broken pipeline and placing them in their correct positions. You can access the main plumbing map three times to find out where the pipe should go before the circuits burn out due to flooding from the unrepaired pipes.

The piece you are holding is displayed in the box in the bottom right corner of the screen and when you place it in the correct position the screen will flash blue.

You score five points for each corner piece placed correctly and a point for each straight one. Happy plumbing!

CONTROLS

Z	Left
X	Right
:	Up
/	Down
Return	Take a piece of pipe
Shift	Drop a piece of pipe
H	Help
Q	Quit current game

PROCEDURES

left	Move droid left
right	Move droid right
up	Move droid up
down	Move droid down
udlr	Calculate <i>pmem</i> from direction of droid
title	Clear screen and print game title
pick	Pick up a piece of pipe
put	Put down a piece of pipe
hlp	Display complete pipe for three seconds
scr	Calculate score and bonus
nastie	Calculate direction of the nastie and move it
setst	Set droid to starting position
dis	Display the hi-score table
hi	Should your score be in hi-score table?
input	Input routine for name
sp()	Print a sprite
dh()	Print double-height string
copy()	Copy data from memory to playing area memory
disp()	Display data on screen
d()	Time delay
read()	Read data

VARIABLES

time	Delay to next time limit beep
scr	Score
level	The level/pipe you are on
Q	Flag to say whether you've run out of time or quit
C	Colour of double height text
X	X coordinate of double-height text
Y	Y coordinate of double-height text
nx	Nastie X position
ny	Nastie Y position
nastmem	Location of nastie in playing area data
mem	Location of droid in playing area data
piece	Sprite number of the piece picked
pmem	Location to check before moving
GS	Key check
AS	String to be printed in double-height
NS	Name to be entered into hi-score table
NS()	Name in hi-score table
SC%	Scores in hi-score table
SC%	Set to scr after each game
A%	Accumulator value before code CALled
B%	Droid sprite number and direction
H%	Number of times help screen used
I%,J%	Loop count
K%	Key input value
L%	Location to poke blue for water in time limit pipe
M%	Location of data for each level/pipe
N%	Position of new name in hi-score table
R%	Random number
S%	Time setting after each game
T%	Time setting for time delays and tests
X%	Lo-byte of address for code routine
Y%	Hi-byte of address for code routine

128K
ROM

MEGA-3

MEGA-3 ROM

A single 128K ROM containing INTER-WORD, INTER-SHEET and INTER-CHART. The package contains all manuals, keystrips and quick reference cards supplied with the individual packages, but the software is *all* on one chip, occupying just one ROM socket.

MEGA-3 ROM is compatible with the entire range of BBC Micros: Model-B, B+, B+128, Master and Compact.

Upgrades: Existing owners may optionally trade-in their INTER-WORD, INTER-SHEET or INTER-CHART for a discount of 25% each. This means that existing owners of all three may obtain a trade-in discount of 75%—a cost of just £21.25 + VAT (£24.44 incl.).

Price: full package £85.00 + VAT (£97.75 incl.).



Computer Concepts Ltd

Gaddesden Place, Hemel Hempstead
Herts HP2 6EX. Tel 0442 63933

◀ From Page 141

ADDRESSES

left Move droid left
right Move droid right
up Move droid up
down Move droid down
display Show data on screen with sprites
sp Print sprite number defined by A
dht Print double-height character
set1 Print droid
compare Check if pipe complete
memL Lo-byte of address
memH Hi-byte of address
check Pipe complete flag
area Playing area data

```
10 REM Pipeline
20 REM By James Bee
30 REM (c) The Micro User
40 IF PAGE<1900 THEN PAGE=1900:CHAI
N"PIPLINE" ELSE GOTO 1970
50 MODE2
60 left=&1100:right=&1112:up=&1124:do
wn=&1136:display=&114F
70 sp=&1222:dht=&11B5:set1=&1148:chec
k=&78:compare=&120C
80 DIM SC$(6),NS(6):*FX213,1
90 area=&800:time=1000:*FX9,1
100 memL=&70:memH=&71:*FX10,1
110 FOR I%=0 TO 5:NS(I%)="Micro User":
SC$(I%)=(6-I%)*20:NEXT
120 PROCtitle:zss="0000"
130 PROCdh("Keys",7,6,6)
140 COLOURS:PRINT"SPC4Z - Left"S
PC4X - Right"SPC4: - Up"SPC4/ - D
own"SPC4H - Help"SPC4Q - End Game"
"SPC4RET - Pick"SPC4SFT - Drop"
150 PROCdh("Press SPACE to start",0,28
,1)
160 T%=TIME:REPEAT:GS=INKEY$(0):UNTIL
GS=" " OR TIME>T%+700
170 IF GS=" " THEN 220
180 PROCdis:PROCdh("by James Bee",5,29
,9)
190 T%=TIME:REPEAT:GS=INKEY$(0):UNTIL
GS=" " OR TIME>T%+700
200 IF GS=" " THEN 220
210 GOTO120
220 RESTORE 1960:scr=0
230 level=1:H%=0:Q=0
240 VDU12,19,2,0,0,0,23;8202;0;0;0;
250 PROCdh("Pipeline",6,1,3)
260 AS=STR$scr
270 PROCdh(RIGHTS(zs$+AS,3),12,29,2)
280 REPEAT
290 L%=&7887:?check=199
300 nx=18:ny=1:piece=0
310 nastmem=area+ny*20+nx
320 mem=area+201
330 READ M%
340 PROCcopy(M%)
350 PROCdisp(M%)
360 FOR I%=7880 TO 7980 STEP 32
370 PROCsp(I%,2)
380 SOUND 2,-9,(I%-7880)/32+200,1
390 NEXT
400 PROCsp(I%,8)
410 VDU20:PROCbox
420 PROCd(200)
430 FOR I%=0 TO 8F0
440 IF ?(M%+I%)<2 OR ?(M%+I%)>7 THEN 4
```

```
80
450 R%=RND(235)
460 IF ?(area+R%)<>0 OR area+R%=mem OR
R%=38 THEN 450
470 ?(area+R%)=? (M%+I%):SOUND1,-2,R%,1
480 NEXT:PROCdisp(area)
490 PROCsetst
500 TIME=0
510 REPEAT
520 T%=TIME
530 REPEAT
540 PROCnasty
550 IF INKEY-17 Q=1
560 IF INKEY-98 PROCleft:GOTO600
570 IF INKEY-67 PROCright:GOTO600
580 IF INKEY-73 PROCup:GOTO600
590 IF INKEY-105 PROCdown
600 IF INKEY-74 IF piece=0 PROCpick
610 IF INKEY-1 IF piece>0 PROCput
620 IF INKEY-85 IF H%<3 PROCchp
630 PROCd(7)
640 UNTIL TIME>T%+time OR ?check=0 OR
Q=1
650 ?L%=48:L%?633=48:L%=L%+8
660 VDU7
670 IF TIME>38*time Q=1
680 UNTIL ?check=0 OR Q=1
690 S%=TIME
700 VDU28,1,25,18,6,12,26
710 PROCdh("Pipe "+STR$level,7,8,6)
720 IF ?check=0 PROCdh("Complete",6,11
,6):PROCdh("Well done!",5,15,5):GOTO740
730 PROCdh("Incomplete",5,11,6):PROCdh
("Bad Luck",6,15,5)
740 PROCscr:PROCdh("Press any key!",3,
22,7)
750 *FX15
760 G=GET:level=level+1:UNTIL level=5
OR ?check<=0
770 PROCchi:GOTO180
780 DEF PROCdisp(D%)
790 X%=D%MOD256:Y%=D%DIV256
800 CALLdisplay:ENDPROC
810 DEF PROCleft:B%=14
820 IF mem?1 A%=14:CALLset1:ENDPROC
830 mem=mem-1:A%=0:CALLset1
840 CALLleft:ENDPROC
850 DEF PROCright:B%=13
860 IF mem?1 A%=13:CALLset1:ENDPROC
870 mem=mem+1:A%=0:CALLset1
880 CALLright:ENDPROC
890 DEF PROCup:B%=11
900 IF mem?20 A%=11:CALLset1:ENDPROC
910 mem=mem-20:A%=0:CALLset1
920 CALLup:ENDPROC
930 DEF PROCdown:B%=12
940 IF mem?20 A%=12:CALLset1:ENDPROC
950 mem=mem+20:A%=0:CALLset1
960 CALLdown:ENDPROC
970 DEF PROCpick:PROCudlr
980 IF ?pmem<2 OR ?pmem>7 ENDPROC
990 piece=?pmem:?pmem=0:PROCdisp(&B00)
:PROCsp(&7AB0,piece):A%=B%:CALLset1
1000 ENDPROC
1010 DEF PROCput:PROCudlr
1020 IF ?pmem>0 OR pmem=nastmem OR pmem
=8BC9 ENDPROC
1030 ?pmem=piece:PROCdisp(&B00):PROCsp(
&7AB0,0):A%=B%:CALLset1
1040 IF ?(M%+pmem-&B00)=piece VDU19,0,4
,0,0,0:PROCd(20):VDU20:SOUND 1,-9,255,2
1050 piece=0
1060 X%=M%MOD256:Y%=M%DIV256
1070 CALLcompare:ENDPROC
1080 DEF PROCcopy(Q%)
```

```
1090 FOR I%=0 TO 8F0
1100 IF I%?Q%<2 OR I%?Q%>7 I%?&B00=I%?Q
% ELSE I%?&B00=0
1110 NEXT:ENDPROC
1120 DEF PROCd(U%)
1130 E%=TIME:REPEATUNTIL TIME>E%+U%
1140 ENDPROC
1150 DEF PROCchp:Z%=TIME
1160 PROCdisp(M%):PROCd(200)
1170 H%=H%+1:PROCdisp(area)
1180 A%=B%:CALLset1:TIME=Z%:ENDPROC
1190 DEF PROCdh(SS,X,Y,C):COLOUR C
1200 LOCAL J%:PRINTTAB(X,Y);
1210 FOR J%=1 TO LENS$
1220 A%=ASCID$(SS,J%):CALLdht:NEXT
1230 ENDPROC
1240 DEF PROCsp(loc,F%):A%=F%
1250 X%=loc MOD 256:Y%=loc DIV 256
1260 CALLsp:ENDPROC
1270 DEF PROCudlr
1280 IF B%=11 pmem=mem-20
1290 IF B%=12 pmem=mem+20
1300 IF B%=13 pmem=mem+1
1310 IF B%=14 pmem=mem-1
1320 ENDPROC
1330 DEF PROCnasty
1340 IF nastmem=mem GOTO 1410
1350 PROCsp(&3A00+nx*32+ny*1280,0)
1360 D%=RND(4)
1370 IF D%=1 IF nastmem?-20=0 ny=ny-1:n
astmem=nastmem-20
1380 IF D%=2 IF nastmem?20=0 ny=ny+1:na
stmem=nastmem+20
1390 IF D%=3 IF nastmem?1=0 nx=nx+1:nas
tmem=nastmem+1
1400 IF D%=4 IF nastmem?-1=0 nx=nx-1:na
stmem=nastmem-1
1410 PROCsp(&3A00+nx*32+ny*1280,10)
1420 IF nastmem=mem FOR I%=128 TO 0 STE
P-2:SOUND 2,-9,I%,1:NEXT:A%=0:CALLset1:P
ROCsetst
1430 ENDPROC
1440 DEF PROCsetst
1450 memloc=&3A00+(10*1280)+32
1460 ?memL=memloc MOD 256
1470 ?memH=memloc DIV 256
1480 PROCsp(memloc,11):B%=11
1490 mem=area+20*10+1:ENDPROC
1500 DEF PROCbox
1510 MOVE 1098,104:DRAW1098+104,104:DRA
W1098+104,20:DRAW1098,20:DRAW1098,104
1520 ENDPROC
1530 DEF PROCscr
1540 *FX213,255
1550 *FX214,1
1560 FOR I%=0 TO 8F0
1570 IF M%?I%<2 OR M%?I%>7 THEN 1630
1580 IF M%?I%<>area?I% THEN 1630
1590 IF area?I%<4 scr=scr+1
1600 IF area?I%>3 scr=scr+5
1610 AS=STR$scr:PROCdh(RIGHTS(zs$+AS,3)
,12,29,2)
1620 VDU7
1630 NEXT
1640 *FX213,1
1650 IF Q=1 ENDPROC
1660 PROCdh("Bonus!",7,18,3)
1670 FOR I%=S% TO 37*time STEP time:?L%
=48:(L%+633)=48:L%=L%+8:SOUND 2,-2,I%,1
1680 scr=scr+5:AS=STR$scr:PROCdh(RIGHTS
(zs$+AS,3),12,29,2):NEXT
1690 ENDPROC
1700 DEF PROCinput:PROCtitle
```


Turn to Page 144 ▶

◀ From Page 143

```

1710 PROCdh("You are in the",2,7,6)
1720 PROCdh("High Score table!",1,10,6)
1730 PROCdh("Enter Your Name",2,16,5)
1740 PROCdh(STRING$(12," "),4,21,132)
1750 PROCdh(STRING$(12," "),4,23,132)
1760 NS="":PRINTTAB(5,23);
1770 REPEAT:VDU23,1,1;0;0;0;K%=GET
1780 IF K%=127 NS=LEFT$(NS,LENNS-1):GOT
01810
1790 IF K%=13 THEN1820
1800 IF LENNS<10 NS=NS+CHR$(K%)
1810 PROCdh(NS+" ",5,22,7):VDU8,10
1820 UNTIL K%=13:COLOUR128:ENDPROC
1830 DEF PROChi:SC%=scr:*FX21
1840 IFSC%<SC%(5) THEN1870
1850 FORI%=0 TO 5:IFSC%<SC%(I%) NEXT EL
SE FOR J%=5 TO I%+1 STEP-1:SC%(J%)=SC%(J
%-1):NS(J%)=NS(J%-1):NEXT:SC%(I%)=SC%:NS
(I%)="":N%=I%:SC%=0:I%=5:NEXT
1860 PROCinput:NS(N%)=NS
1870 ENDPROC
1880 DEF PROCDIS:PROctitle
1890 PROCdh("Top Plumbers",3,6,6)
1900 FORJ%=0 TO 5:PROCdh(NS(J%)+STRING$(
14-LENNS(J%),"."),2,10+J%*3,5)
1910 PROCdh(STR$(SC%(J%)),16,10+J%*3,7)
1920 NEXT:ENDPROC
1930 DEF PROctitle:VDU12,23;802;0;0;0;
1940 PROCdh("Pipeline!",5,3,3)
1950 ENDPROC
1960 DATA &900,&A00,&E00,&F00
1970 MODE7:RESTORE2150:REM Cut here
1980 PRINT"Assembling...":*TAPE
1990 PROCread(&1100,"Code")
2000 PROCread(&0900,"Pipe 1")
2010 PROCread(&0A00,"Pipe 2")
2020 PROCread(&0E00,"Pipe 3")
2030 PROCread(&0F00,"Pipe 4")
2040 PROCread(&1320,"Sprite"):FX18
2050 FOR I%=0 TO 31:(&1300+I%):0:NEXT
2060 PRINT"Please wait some more...";
2070 VDU21:*K.0RESTORE2190:I%=(2+!&1C)A
ND&FFFF:REPEATI%=I%-1:U.2I%=13:I%?1=&FF:
MOLDIMFOR I%=0 TO TOP STEP 4:I%!*1500:I%
!PAGE:NEXTIMPAGE=&1500:MOLDIM40:MRUNIFIM
2080 *FX138,0,128
2090 END
2100 DEF PROCread(M%,B%):PRINT B%
2110 READ Q%:FOR J%=1 TO Q%:READ CS
2120 !M%=EVAL("Q"+CS):M%=M%+4
2130 NEXT:ENDPROC
2140 REM Code
2150 DATA 97
2160 DATA E970A538,A5708520,8500E971
2170 DATA 4C0EA971,A5181148,85206970
2180 DATA 6971A570,A9718500,11484C00
2190 DATA E970A538,A5708500,8505E971
2200 DATA 4C0BA971,A5181148,85006970
2210 DATA 6971A570,A9718505,11484C0C
2220 DATA 71A470A6,8E12224C,698C1168
2230 DATA 8500A911,853AA974,850BA975
2240 DATA 8500A98B,BD8CA68C,806974A5
2250 DATA 222075A4,74A51812,74852069
2260 DATA 006975A5,8CE67585,14C98CA5
2270 DATA AD18DFD0,14691168,AD11688D
2280 DATA 00691169,1811698D,806974A5
2290 DATA 75A57485,75850269,03308BC6
2300 DATA 6011614C,81A9FFA0,8AFF420
2310 DATA 12798D60,79A20AA9,F12012A0
2320 DATA 2017A9FF,FEA9FFEE,A2FFEE20
2330 DATA 127ABD00,20FFEE20,E0E8FFEE
2340 DATA A9F20004,FFEE2017,EE20FFA9
2350 DATA 127ABDFF,20FFEE20,E0E8FFEE

```

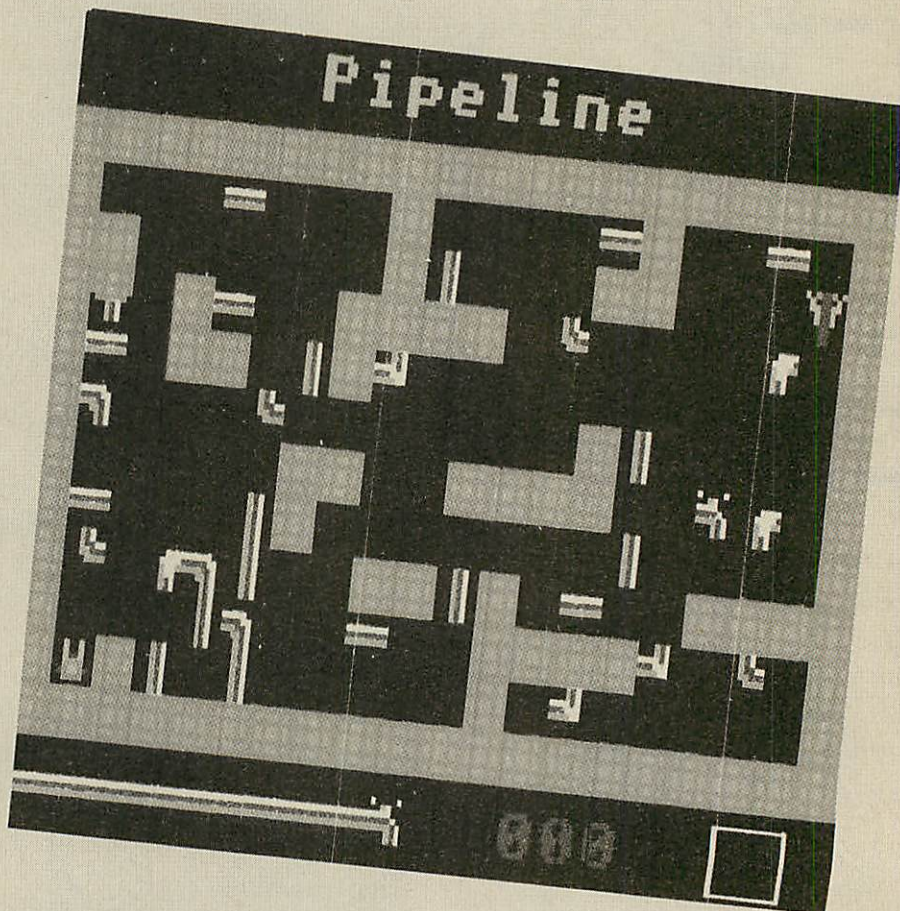

```

2360 DATA A9F20008,FFEE20FE,EE200AA9
2370 DATA 2008A9FF,FFA9FFEE,A9FFEE20
2380 DATA FFEE4C0B,8C12158E,EBA21216
2390 DATA DD9999BD,03D00B00,86F5D0CA
2400 DATA 76866078,00A27784,0A0A8F86
2410 DATA 0A8F260A,260A8F26,0069188F
2420 DATA A912458D,8D8F6513,00A01246
2430 DATA 919999BD,7691C876,20E0E8C8
2440 DATA 29981EF0,E8EDD007,E0E8E8E8
2450 DATA 18E5D020,806976A5,77A57685
2460 DATA 77850269,D2D004A2,1D041F60
2470 DATA 00000611,00000000,00000000
2480 DATA 00000000
2490 REM Pipe 1 data
2500 DATA 60
2510 DATA 01010101,01010101,01010101
2520 DATA 01010101,01010101,00000001
2530 DATA 00000000,00000001,00010000
2540 DATA 01000000,02040101,00000005
2550 DATA 00000001,00010100,01000000
2560 DATA 01030901,01000506,00010101
2570 DATA 05040000,01000000,01070601
2580 DATA 01000301,00000000,03030000
2590 DATA 01000000,00000001,00000300
2600 DATA 00000000,03030100,01000000
2610 DATA 00000001,01010300,01010000
2620 DATA 06030101,01000008,00000001
2630 DATA 04010300,02020202,00070202
2640 DATA 01000000,00000001,07020600
2650 DATA 01000101,00000000,01010101
2660 DATA 00000001,00000000,01000000
2670 DATA 00010101,01000000,00010001
2680 DATA 00000000,01000000,00000000
2690 DATA 01000000,01010101,01010101
2700 DATA 01010101,01010101,01010101
2710 REM Pipe 2 data
2720 DATA 60

```

```

2730 DATA 01010101,01010101,01010101
2740 DATA 01010101,01010101,00000001
2750 DATA 09000000,01010000,00000000
2760 DATA 01000000,00010001,07020204
2770 DATA 04010100,08020202,01000000
2780 DATA 00000101,00000003,07040100
2790 DATA 00010000,01010100,00000001
2800 DATA 04000103,00070202,00010000
2810 DATA 01000100,00000001,03000103
2820 DATA 00000000,00000000,01000000
2830 DATA 00000101,03020403,05020202
2840 DATA 00000001,01000001,00010001
2850 DATA 03010706,03000000,01000000
2860 DATA 01000001,00000001,03010000
2870 DATA 03000101,00000000,01010000
2880 DATA 00000001,06000000,07020202
2890 DATA 00010101,01000000,00010001
2900 DATA 00000000,01000000,00000000
2910 DATA 01000000,01010101,01010101
2920 DATA 01010101,01010101,01010101
2930 REM Pipe 3 data
2940 DATA 60
2950 DATA 01010101,01010101,01010101
2960 DATA 01010101,01010101,00000001
2970 DATA 00000001,00000000,00000000
2980 DATA 01000001,00000001,02040000
2990 DATA 02020202,00000005,01000001
3000 DATA 00010101,01030000,01010101
3010 DATA 00000103,01000000,00000001
3020 DATA 02060000,02020202,02020203
3030 DATA 01000502,04000001,00000502
3040 DATA 01000000,00000103,01000300
3050 DATA 03000001,02020601,01000000
3060 DATA 01000103,01090300,03000001
3070 DATA 00000001,01000000,01000103

```

Turn to Page 147 ▶

REALTIME SOLIDS MODELLER

PROFESSIONAL 3D CAD SYSTEMS



Reviews of the original REALTIME GRAPHICS SYSTEM:

"there isn't anything yet available for the Beeb capable of producing such impressive and powerful graphics" - A&B Computing (June '87).

"there is no other software to rival it" - Beebug (April '87).

"there is no better package" - Acorn User (Dec '87).

The REALTIME SOLIDS MODELLER provides a sophisticated design tool for creating 3D Solid or Wireframe objects of any complexity. Unlike other packages, this system can perform full colour hidden-surface removal for any solid object at high speed. Colour hardcopy of the designs can then be produced on a range of popular pen-plotters or printers for professional results. The package consists of a 32k Graphics Rom, six discs and a 150 page manual. The design system takes all the hard work out of designing solid 3D objects by providing curves and surface generators that can create complex solids of revolution or extrusion from simple outlines; recursive macros to allow a building block design approach; dynamic 3D Viewing in any graphics screen mode for full colour solid displays; 3D Multi-Plotter Driver supporting HP-GL, Plotmate, Penman II, Hewlett Packard, Hitachi 672, Epson HI-80, Watanabe, Sweet-P, Graphtec, Roland, Calcomp, Houston DMP, Sekonick and paper sizes from A0 to A4; Library facilities; and a Data Converter for interfacing to other CAD systems and applications. This system also includes a unique 32k Solids REALTIME GRAPHICS LANGUAGE (Solids RGL) Rom providing 52 star commands which allow flicker-free 3D Animation, Scientific & Mathematical plots or customised 3D packages to be produced from your own programs. Its unique feature is the production of realistic solid images with hidden-surfaces removed at high speed. Also includes a unique 35,000 pixels/sec line generator (considerably faster than Acorn's 9000/sec) for high speed image generation. The Solids RGL is compatible with all the BBC graphics screen, plotting and colour modes including Shadow screen and is up to 5 times faster than the original RGL. The 32k RGL rom behaves as a 16k Rom to the computer hence sideways Ram banks are not affected. For surface and line generation in excess of 1,000,000 pixels/sec, the Solids RGL can also drive Hardware Graphics boards like the Prisma 2/3, Cadsoft Workstation, Pluto and CMS colour cards.



S
V

Silicon Vision

Minimum requirements: BBC B / single drive. Also compatible with the BBC B+. Master series, all versions of DFS & DDFS, 6502 2nd Processor/Turbo, AMX Mouse. REALTIME SOLIDS MODELLER: £89.95 (inclusive); Original REALTIME GRAPHICS SYSTEM: (DFS or ADFS versions available) £49.95 (inclusive); SOLIDS UPGRADE (return original RGL rom with order): £39.95 (inclusive). Contact your local dealer or send cheque/P.O. to: SILICON VISION LTD, Dept. MU, 47 DUDLEY GARDENS, HARROW, MIDDX, HA2 0DQ for immediate delivery. Educational & Dealer enquiries for bulk discounts are welcome. Official orders accepted. Tel: 01-422 2274.

HEAD COACH v3

At Coda Software we believe we have created the most challenging and realistic computer simulation of American Football that is currently available. "HEAD COACH v3" is a direct simulation of the National Football League and offers you the opportunity to coach a team in the world's toughest league. Here are some of the features.

- Playbook featuring over 40 offensive and defensive plays
- Full roster of players
- Database of all N.F.L. teams
- Pre season/regular season/playoffs and Superbowl
- Ability to change your team during a match
- Injuries and training camp
- Rookie players and the college draft

But don't just take our word for it, read what previous satisfied customers have said:

- "Absolutely amazed by the realism" - J. H. Twickenham
- "Excellent" - S. H. Northants
- "I am now addicted to the game" - R. C. Lincs
- "Superb" - N. E. Essex
- "Software and presentation are excellent" - D. F. Bushey

The Database of players and information on all teams which makes "HEAD COACH v3" so realistic, can easily be altered by the user if and when necessary to keep the game fully up to date. However, as a service to all new CODA SOFTWARE customers, we are offering regular information updates FREE OF CHARGE.

BBC B/Master disc £13.95

Amstrad PCW disc £15.95

PC version: Please Phone

Available by Mail Order (all orders despatched within 24 hours) or please phone us if you require more details.

CODA
SOFTWARE

Dept. MU
4 St. Simons Avenue, London SW15 6DU
Telephone: 01-789 9551

SPECIAL OFFERS

25 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £16.50

OR

50 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £26.00


20 x 3.5" DS-DD DISKS
PLUS
40 CAPACITY LOCKABLE BOX
FOR

ONLY £28.00

OR

40 x 3.5" DS-DD DISKS
PLUS
40 CAPACITY LOCKABLE BOX
FOR

ONLY £48.00

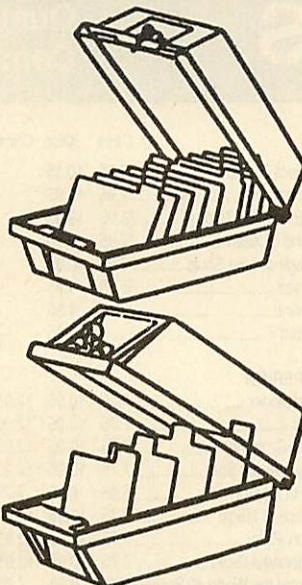

**REMEMBER THE PRICE YOU SEE IS ALL
YOU PAY (U.K. ONLY).
THEY INCLUDE VAT AND CARRIAGE**

Cheque or Postal Order to:



Manor Court Supplies Ltd

Dept MU3, Glen Celyn House, Penybont,
Llandrindod Wells, Powys LD1 5SY
Telephone: 0597 87784 or 0597 87792

SPECIAL OFFERS

75 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £34.00

OR

100 x 5.25" DS-DD DISKS
PLUS
100 CAPACITY LOCKABLE DISK BOX
FOR

ONLY £41.00

50 x 3.5" DS-DD DISKS
PLUS
90 CAPACITY LOCKABLE BOX
FOR

ONLY £60.00

OR

80 x 3.5" DS-DD DISKS
PLUS
90 CAPACITY LOCKABLE BOX
FOR

ONLY £89.00

HEAD CLEANERS

Special offer price if
bought with discs + box
offer

5.25" + Fluid £2.50
3.25" + Fluid £3.50

Both for use with single or
double drives

SPECIAL OFFERS

DISKS 5.25"

QTY	SS/48	DS/48	DS/96
25	£9.00	£10.00	£11.00
50	£16.00	£18.00	£20.00
100	£30.00	£33.00	£36.00
200	£58.00	£61.00	£68.00

All includes envelope, labels and
fitted hub rings
100% guarantee

DISKS 3.50"

QTY	SS/DD	DS/DD
10	£10.00	£13.00
20	£19.00	£25.00
30	£28.00	£37.00
50	£46.00	£52.00
100	£90.00	£100.00

Price includes labels
100% guarantee

UK MADE LIBRARY CASE

5.25" or 3.5"

(10 capacity)

ONLY 95p

(if bought with disks)

DISK BOX

**50 CAPACITY
LOCKABLE
ONLY £7.50**

EDUCATION AND GOVERNMENT ORDERS WELCOME

TRADE ENQUIRIES ALSO WELCOME

FAX FILE ORGANISER



CALENDARS: week per page
month per page



ADDRESS BOOK



USER DEFINED FORMS

Combine the power of your BBC with the flexibility and convenience of a personal organiser (Filofax, Lefax etc) to create a personalised database. Using filofax-size computer paper or single sheets to:

- Print calendars including personal data (on disc file)
- Print Address-book pages, up to 48 entries sorted by name
- Print custom designed forms eg Class registers, accounts etc

The program (by Mike Williams, author of The Experimenters Rom and of BBCsoft's Electric Fields) is menu driven and very easy to use. It comes with full instructions and a pack of special size computer paper. (Extra paper can be purchased as required).

£12.95 inc p&p
80 track disc
sample pack of computer paper

MEWsoft
11 Cressy Road
London NW3 2NB

Also from MEWsoft - THE EXPERIMENTERS ROM £22 INC. P&P
* Very impressive. This Rom should prove invaluable to any teacher performing in experiments involving computer control or monitoring hardware. (School Science Review Sep. 1986)

ASSEMBLY, MACHINE CODE,

PROGRAMMERS REQUIRED

20% - 50% ROYALTIES OFFERED,

FOR CONTRACT WORK ON BBC,
SINCLAIR, COMMODORE, AMSTRAD MICROS.

PLEASE SEND C.V. AND SAMPLES
ON BBC 5.25 DISC TO:

P.O. BOX 3, BRADFORD, WEST YORKS, BD14 6SZ

Carswell Computers

24 Elm Road, Faringdon, Oxon SN7 7EJ
Telephone (0367) 21153

TYPEASY Version 4

- Touch typing course for the BBC B, B+, Master & Electron
- Mistakes displayed with flashing letters
- Teaches correct finger movement
- 139 progressive exercises plus routines for writing more yourself
- Displays errors, speed and performance

disc (40 or 80 track) £15, Econet disc (80 track) £30, cassette £7.50

TYPE INVADERS

- Increases your speed - we guarantee!
- Letters and words rain down faster and faster - type correct letters to stop them
- 10 levels with 4 speeds plus colour and sound
- See review in Acorn User July '86

disc (40 or 80 track) £12.50, Econet (80 track) £25, cassette £7.50
Prices include P&P, please add 15% VAT

BeebDOS version 2 (new)

from MicroBoss

Software for BBC and IBM file interchange

Runs on IBM-PC-XT-AT or compatibles and supports DOS 2.0 or later

Supplied on 360K IBM diskette with manual and plastic wallet the software includes:

- BCOPY Copy files BBC - IBM, IBM - BBC, BBC - BBC (wild cards allowed)
- BCONV Flexible IBM file translate facility enabling text to be passed between VIEW, WORDSTAR and Displaywrite 3 amongst other uses.
- BGRAPH Display BBC mode 0,1,4,5 screen format (AMX Art included) files on IBM standard colour (CGA), enhanced colour (EGA) or Hercules screens for use in IBM PC presentation, DTP, drawing and other graphic applications.

BeebDOS is almost a complete BBC DFS/ADFS for the IBM PC with utilities to catalogue, format, backup, delete, lock, unlock, compact rename, alter title & options, map free space, change and create directories of BBC diskette/files.

Infact BeebDOS is probably the fastest and most powerful BBC/IBM PC file transfer method available and no cables or serial connections are required.

£39.99

Inclusive

BBC double density diskette formats supported are Acorn ADFS, Watford, Solidisk, OPUS DDOS and UDM. Acorn single density DFS is only supported when running BeebDOS on an IBM AT or XT286 with a 360k disk drive. Please send or phone for an information sheet

CHEQUE OR POSTAL ORDER TRADE/EDUCATION ENQUIRIES WELCOME
MICROBOSS LTD 3 HADLEIGH RD FRINTON ESSEX CO13 9HG TEL (02556) 71095

C & F ASSOCIATES

Quality Service at
Competitive Prices

Cass	Disc	Comp	Cass	Disc	Comp	Cass	Disc	Comp	Cass	Disc	Comp
ADDICTIVE			ELITE			Project Thesius			Speech		
Football Manager	2.99	-	Paperboy	7.75	12.95	Myorem	7.95	10.95	Winter Olympiad 88	7.75	12.95
ASL			FIREBIRD			Rick Hanson Trilogy	18.95	19.95	Spy Vs. Spy	7.75	12.95
Omega Orb	6.75	10.95	Sentinal	7.75	12.95	Island of Xaan	7.95	10.95	Phantom	6.75	10.95
Graham Gooch	7.75	10.95	Cholo	-	15.95	Village of Lost Souls	7.95	10.95	Winter Olympics	6.50	- 10.95
Thunderstruck 2	6.75	10.95	IMAGINE			Banjax	2.95	4.95	Oxbridge	6.75	-
Sphere of Destiny	6.75	10.95	Arkanoid	7.20	-	Beeline	2.95	4.95	The Big KO	6.75	-
Ransack	7.75	10.95	Konami's Coin-Op. Hits	7.75	-	Enthar 7	-	14.95	Future Shock	6.75	-
Despatch Rider	7.20	9.95	Yie Ar Kung Fu 2	7.20	-	TYNESOFT			Goal	6.75	-
Ziggy	7.20	9.95	INCENTIVE			Winter Olympiad 88	7.75	12.95	-	-	-
BUG-BYTE			Graphic Adventure Creator	19.95	22.95	Spy Vs. Spy	7.75	12.95	-	-	-
Plan B	2.95	-	Ket Trilogy	7.75	10.95	Phantom	6.75	10.95	-	-	-
Bug-Byte Compendium	-	6.95	LEISURE GENIUS			Winter Olympics	6.50	- 10.95	-	-	-
CDS			Scrabble	10.95	12.95	Oxbridge	6.75	-	-	-	-
Colossus Chess 4	7.75	12.95	Monopoly	10.95	12.95	The Big KO	6.75	-	-	-	-
B. Clough Football Fortune	12.95	15.95	LOGOTRON			Future Shock	6.75	-	-	-	-
DATABASE			XOR	7.75	10.95	Goal	6.75	-	-	-	-
Mini Office 2	12.45	14.95 19.50	XOR Designer	-	12.95	US GOLD			Spy Hunter	7.75	-
Mini Office 2 (Master 80T)	-	17.50	LOTHLORIAN			Around the World 40 Screens	5.95	6.95 7.75	Impossible Mission	7.20	12.95
French on the Run	7.75	-	Roundheads	-	10.95	Superior Collection 1	7.75	10.95 12.95	Unbelievable Ultimate	7.75	-
DESIGN PEOPLE			MICRO-POWER			Superior Collection 2	7.75	10.95 12.95	Raid Over Moscow	7.75	-
Sink the Bismark	-	9.95	Micro-Power Magic	6.75	6.75	Grand Prix Construction	7.75	10.95 12.95	-	-	-
Tanks!	-	10.95	Micro-Power Magic 2	6.75	6.75	ALL PRICES INCLUDE VAT AND POSTAGE & PACKING			(Overseas Orders add £1.00 per order or Airmail £2.00 per item)		
Battle of Britain	7.75	10.95	Imogen	7.20	7.75 10.95	Cheques/PO payable to:			C & F ASSOCIATES		
DOMARK			MIRRORSOFT			and send to			C & F ASSOCIATES (MU) CRANFORD HOUSE,		
Trivial Pursuit	12.95	17.50	Strike Force Harrier	7.50	-	WOOLSEY, BIDEFORD, N. DEVON EX39 5QW			Telephone: (023 73) 619		
Living Daylights	7.75	10.95	Spitfire 40	7.75	10.95 12.95	Orders normally despatched within 24 hours of receipt but allow maximum of 7 days			For our comprehensive range of BBC and Electron Programs Please send for list		
Star Wars	7.75	11.95	MOSAIC								
DR. SOFT			Yes Prime Minister	12.95	17.50						
Phantom Combat	7.50	10.95	ROBICO								
BEAU JOLLY			The Hunt	7.95	10.95						
Computer Hits 4	7.95	-	Rick Hanson	7.95	10.95						
Five Star Games 3	7.95	-									

◀ From Page 144

3080 DATA 01070600,06000001,02020202
 3090 DATA 02020202,01000007,01000000
 3100 DATA 00000001,01010000,00000101
 3110 DATA 00000100,01000100,00010001
 3120 DATA 00000000,00000000,00000000
 3130 DATA 01000000,01010101,01010101
 3140 DATA 01010101,01010101,01010101
 3150 REM Pipe 4 data
 3160 DATA 60
 3170 DATA 01010101,01010101,01010101
 3180 DATA 01010101,01010101,00000001
 3190 DATA 00000001,00000100,09000000
 3200 DATA 01000000,00000001,02040001
 3210 DATA 00000105,03000804,01000100
 3220 DATA 00000001,00030101,01010103
 3230 DATA 06000003,01000005,00000001
 3240 DATA 02030204,00000007,04000003
 3250 DATA 01000007,00000001,02060103
 3260 DATA 02020202,03000007,01000000
 3270 DATA 00010101,00000103,01010101

3280 DATA 03010101,01010000,00000001
 3290 DATA 02040103,01050202,07020204
 3300 DATA 01000000,00000001,00070206
 3310 DATA 01030000,00000003,01000000
 3320 DATA 00000001,00000000,02060001
 3330 DATA 00010007,01000100,00010001
 3340 DATA 00000000,00000000,00000000
 3350 DATA 01000000,01010101,01010101
 3360 DATA 01010101,01010101,01010101
 3370 REM Sprite data
 3380 DATA 112
 3390 DATA 13031303,03130313,13031303
 3400 DATA 03130313,23032303,03230323
 3410 DATA 23032303,03230323,3C3F0000
 3420 DATA 00003033,3C3F0000,00003033
 3430 DATA 3C3F0000,00003033,3C3F0000
 3440 DATA 00003033,00000000,00000000
 3450 DATA 31313131,31313131,3D3D3D3D
 3460 DATA 3D3D3D3D,00000000,00000000
 3470 DATA 00000000,00000000,35000000
 3480 DATA 31313131,3F3F0000,3D3D3F3F
 3490 DATA 3E3F0000,00003033,3C3F0000
 3500 DATA 00003033,3C3F0000,31313336
 3510 DATA 3F2A0000,3D3D3D3D,00000000
 3520 DATA 00000000,00000000,00000000
 3530 DATA 31313131,00001030,363C3D3D
 3540 DATA 00003033,3C3F0000,00003033
 3550 DATA 3C3F0000,00003033,3D3F3131

3560 DATA 00003033,3F3D3D3D,0000203F
 3570 DATA 00000000,00000000,3C3F003A
 3580 DATA 00002033,3C3F3730,00313133
 3590 DATA 2A000035,003D3D3D,00000000
 3600 DATA 00000000,13031303,00000001
 3610 DATA 13031303,31313103,23032303
 3620 DATA 3D3D3D03,23032303,00000002
 3630 DATA 004545A2,00000000,0E0E0406
 3640 DATA 0404040E,0D0D0809,0808080D
 3650 DATA 008A8A51,00000000,00000000
 3660 DATA 00000400,0E0A0A00,00030703
 3670 DATA 0D050500,00030B03,00000000
 3680 DATA 00000800,00040000,00000000
 3690 DATA 03070300,000A0A0E,030B0300
 3700 DATA 0005050D,00080000,00000000
 3710 DATA 01010000,00000101,0B030800
 3720 DATA 0008030B,080F0000,00000F08
 3730 DATA 000A0000,00000A00,00050000
 3740 DATA 00000500,040F0000,00000F04
 3750 DATA 07030400,00040307,02020000
 3760 DATA 00000202



This listing is included in this month's tape & disc offer. See order form on Page 159.

10 = 00	430 = F3BF E	850 = F877 D	1270 = 4CB0 8	1690 = ED0F 4	2110 = 3F31 3	2530 = 1954 0	2950 = 7D42 5	3370 = 00 6
20 = 00	440 = CA9A C	860 = 7145 2	1280 = 7F8D C	1700 = B3B6 F	2120 = D149 3	2540 = 18AD 6	2960 = 5842 E	3380 = 59A7 1
30 = 00	450 = 679B B	870 = 73C6 B	1290 = 288 3	1710 = A801 B	2130 = E531 9	2550 = C22A E	2970 = 25F 4	3390 = A90C 4
40 = 5A88 8	460 = 4F76 B	880 = E4D6 3	1300 = 8385 F	1720 = 7C30 2	2140 = 00 9	2560 = AA0C 5	2980 = C148 2	3400 = 6BF7 2
50 = DA59 D	470 = CA4D 3	890 = C45E E	1310 = 2168 2	1730 = 51B5 F	2150 = 984C E	2570 = CE18 7	2990 = E0DC 4	3410 = 8448 A
60 = D68E A	480 = A667 3	900 = 3FB8 6	1320 = ED0F 2	1740 = C5C 4	2160 = 2A76 E	2580 = 1F80 8	3000 = A204 0	3420 = 1089 2
70 = E56E C	490 = 6BEE 6	910 = 1C55 2	1330 = 47E2 7	1750 = 871C F	2170 = 2591 8	2590 = AFE1 2	3010 = C3B3 C	3430 = 8FFB 8
80 = B5FA C	500 = 173E 9	920 = DB0E A	1340 = 15BE 6	1760 = 8292 F	2180 = 83C1 4	2600 = 2BA B	3020 = 09B 7	3440 = 46FD F
90 = CA1E C	510 = BFBA 8	930 = EE81 A	1350 = A75C A	1770 = AB4A F	2190 = A992 4	2610 = C6B5 1	3030 = A383 D	3450 = 5BE3 A
100 = 668D E	520 = 32AD E	940 = F883 6	1360 = 7EC7 6	1780 = 9A28 0	2200 = 85C1 6	2620 = 763 4	3040 = CA7F E	3460 = FFAF F
110 = 6F1D D	530 = BFBA B	950 = 1732 9	1370 = 25AD 8	1790 = A0EF 8	2210 = 3156 9	2630 = 96BC 4	3050 = 273A 9	3470 = 6D92 C
120 = 38DF 2	540 = 4995 7	960 = 51B4 E	1380 = 4228 5	1800 = 70C6 F	2220 = DC04 0	2640 = 19D6 D	3060 = CB10 2	3480 = 4F86 0
130 = 161F 7	550 = 9CE6 3	970 = 6DA9 A	1390 = EF8D 6	1810 = 5EDB 6	2230 = 90E8 D	2650 = A73C 9	3070 = 1549 3	3490 = 3262 A
140 = 162B 6	560 = 3314 8	980 = D9E8 6	1400 = 7F46 7	1820 = C7A3 5	2240 = FF93 0	2660 = BA3E 0	3080 = AB2E 2	3500 = DD9 A
150 = 3D05 9	570 = 975B 7	990 = 48F7 9	1410 = A29D C	1830 = DE27 8	2250 = 2A6A 1	2670 = A0F6 7	3090 = 8653 6	3510 = 1602 6
160 = 7691 E	580 = AAAC D	1000 = ED0F D	1420 = 41DD 4	1840 = 2485 B	2260 = 3CF4 B	2680 = 7464 3	3100 = F60B 1	3520 = DC40 6
170 = 8C0B E	590 = A77 2	1010 = 7761 2	1430 = ED0F D	1850 = 3624 0	2270 = 4632 E	2690 = 13A0 1	3110 = 1897 7	3530 = 3F05 D
180 = A989 9	600 = B3CC 9	1020 = 4186 9	1440 = 6599 9	1860 = 9C2C 4	2280 = 16CE A	2700 = 7042 1	3120 = DC40 B	3540 = 1089 C
190 = 7691 8	610 = 59F6 0	1030 = 1092 1	1450 = 3759 8	1870 = ED0F 6	2290 = 813B 2	2710 = 00 1	3130 = 13A0 1	3550 = 4F21 0
200 = 8C0B C	620 = 21EC 3	1040 = A385 F	1460 = 25C4 E	1880 = 124F 2	2300 = C4B8 B	2720 = F897 B	3140 = 7042 A	3560 = DAB3 2
210 = F4BC 4	630 = ED08 A	1050 = 5E1F 3	1470 = 9CE2 A	1890 = 4F14 9	2310 = 942E 1	2730 = 7042 1	3150 = 00 A	3570 = 60D0 3
220 = EF7F E	640 = 6B74 2	1060 = 99FF 5	1480 = 25CA 1	1900 = 7341 1	2320 = 617E 0	2740 = 5842 E	3160 = F897 9	3580 = 91C4 F
230 = C7ED 2	650 = CE34 0	1070 = 87CA C	1490 = E6AC 3	1910 = B801 7	2330 = F8D3 A	2750 = 4753 8	3170 = 7042 5	3590 = 7816 B
240 = E04E 6	660 = 4638 9	1080 = 43B2 7	1500 = 81E6 7	1920 = E531 2	2340 = 16A3 2	2760 = FEF3 B	3180 = 5842 B	3600 = 485E F
250 = 3FFF 7	670 = 8623 6	1090 = F3BF B	1510 = 5597 6	1930 = D059 2	2350 = 3072 2	2770 = ED0A 4	3190 = 2AE6 2	3610 = 21F7 2
260 = D23C B	680 = 2827 D	1100 = 98A9 8	1520 = ED0F E	1940 = C172 B	2360 = BDDA 4	2780 = C114 2	3200 = F75 2	3620 = 5008 F
270 = A982 0	690 = 6380 7	1110 = E531 6	1530 = 1192 9	1950 = ED0F 6	2370 = C634 F	2790 = 795A 6	3210 = 4E37 F	3630 = 1263 1
280 = BFBA C	700 = 47CA C	1120 = CFBA C	1540 = 8372 D	1960 = F241 8	2380 = F066 4	2800 = 7F70 A	3220 = F6AF 5	3640 = E2C6 F
290 = F715 C	710 = 9A72 B	1130 = 1E4F F	1550 = 85A7 9	1970 = ACA6 A	2390 = B2D0 A	2810 = FC96 E	3230 = 59AC A	3650 = AE05 C
300 = D8D0 B	720 = DA38 9	1140 = ED0F 1	1560 = F3BF D	1980 = 4CB5 8	2400 = 47EB 2	2820 = 6421 5	3240 = E688 C	3660 = AD39 F
310 = CF3B C	730 = AE2 4	1150 = B9AC 7	1570 = 19F6 2	1990 = 80BF 2	2410 = 35B3 2	2830 = 63B 8	3250 = 669B 9	3670 = 7490 E
320 = 885B A	740 = 967C 9	1160 = 98A8 8	1580 = F87F 8	2000 = A733 2	2420 = 7E0B 3	2840 = 7F4E 8	3260 = C63A 5	3680 = EE93 4
330 = 8D00 5	750 = A022 3	1170 = CDBE 1	1590 = 46C3 3	2010 = 9435 8	2430 = D2D0 F	2850 = CA3B 1	3270 = 3539 1	3690 = 1EB2 B
340 = FF7F 1	760 = 174B A	1180 = A86E 2	1600 = 2910 E	2020 = A6A8 B	2440 = 5D2C E	2860 = 5A7D 2	3280 = BF1A 2	3700 = BDEC B
350 = FFDE 9	770 = 440 7	1190 = 339D 1	1610 = 7E06 2	2030 = EC9D 6	2450 = E9E 2	2870 = 845 6	3290 = F170 E	3710 = 333E D
360 = E1DA F	780 = EB80 4	1200 = 1E93 C	1620 = 4638 5	2040 = 11F9 8	2460 = D0DE 4	2880 = D101 7	3300 = 9FC3 D	3720 = 1609 3
370 = 158 7	790 = 68BC 4	1210 = 4349 9	1630 = 2C83 F	2050 = 15D0 3	2470 = EB9A E	2890 = A0F6 A	3310 = 3F47 2	3730 = 8C9B 8
380 = 9FF9 7	800 = 245A 1	1220 = FDC0 A	1640 = 37 F	2060 = D7EC D	2480 = A483 0	2900 = 7464 8	3320 = BF18 F	3740 = BF13 E
390 = 2C83 9	810 = 95C6 0	1230 = ED0F C	1650 = 87DF 6	2070 = 6B15 D	2490 = 00 0	2910 = 13A0 9	3330 = 9275 7	3750 = 1C6B F
400 = EE93 2	820 = 56E7 F	1240 = BAB0 F	1660 = 6038 5	2080 = 5DEC 4	2500 = F897 3	2920 = 7042 3	3340 = DC40 0	3760 = EAA1 5
410 = 96FC F	830 = FCAD 6	1250 = 815C 8	1670 = 6A4E E	2090 = FD2E 7	2510 = 7D42 6	2930 = 00 3	3350 = 13A0 4	
420 = A8A1 3	840 = F3E9 8	1260 = FC97 8	1680 = 64 9	2100 = FD95 C	2520 = 5842 F	2940 = F897 5	3360 = 7042 6	

DISKETTES/MEMORIES

5.25" UNBRANDED

	Qty 10	25	50
DS/DD 40T	6.00	12.00	22.50
DS/DD 80T	7.00	14.00	24.00

5.25" TOP QUALITY MAXELL

DS/DD 40	14.00	-	60.00
DS/DD 80	18.00	-	80.00

3.5" UNBRANDED

SS/DD	12.00	27.50	50.00
DS/DD	15.00	35.00	70.00

27128 - 250 NS 21V	4.50
27256 - 250 NS 12.5V	5.00
27C256 - 250 NS 12.5V	6.00
27512 - 250 NS 12.5V	9.00

DFS KIT (8271+CMOS & TTL ICS)	42.50
ex DFS ROM	

NON VOLATILE RAM MODULES

Complete with Read & Write Protect Switches
and Software

16K	22.00	32K	30.00
-----------	-------	-----------	-------

FLORA ELECTRONICS

14 LEVER STREET, MANCHESTER M1 1LN

Tel: 061-228 3553



COMPUTER REPAIR SERVICE

BBC AMSTRAD COMMODORE SPECTRUM

- ★ Amstrad, Acorn and Brother authorised service centres
- ★ All repairs fully guaranteed
- ★ Fixed low prices or free estimates
- ★ Repairs returned within 48 hrs
- ★ Trade enquiries also welcome

CONTACT ELAINE EDGAR AT:
BLUE CHIP COMPUTERS LIMITED

2 GLASGOW RD, CORSTORPHINE
EDINBURGH EH12 8HL



031-334 6058

*Have you written a program
good enough to sell?*

If so we would like to hear from you. Database Software is looking for good quality software - games, utilities, business programs. If you think you have a winner send it for evaluation (on disc or tape, plus instructions and a brief outline) to:

The Manager
Database Software
Adlington Park
Adlington
Macclesfield SK10 5NP

MONITORS - DRIVES PRINTERS - 8271/1770 & COMPONENTS

VIGLEN CONSOLES - PC STYLE

BBC B Console	£41.30 (c)
Master Console (Professional)	£48.25 (c)
Supports Monitor, can enclose two drives	

WINCHESTER - Fully compatible

Well known make-Phone, SAE Leaflet
(Master-Plug-'n'-Go-B requires 1770 DFS
and/or ADFS)

20MB Drive	£491.30 (d)
28MB Drive	£534.80 (d)
UFD 2000 20MB Hard Drive +SW (400K)	
Floppy+PSU & Monitor Bridge £759.00 (d)	

5.25" 40/80 TRACK D/SIDED DRIVES

-new switched cased drives with leads
(Famous Japanese mechanisms)

SINGLE (400K) Prices	£82.50 (c)
DOUBLE (800K) Slashed!	£165.00 (c)
Master Bridge-Twin (800K) Drives	
with PSU	£185.00 (d)
5.25"+3.5" Combo with PSU	£208.85 (c)
Single 3.5" (400K) with PSU	£111.25 (c)
Double 3.5" (800K) with PSU	£197.35 (c)

DFS KITS with fitting instructions

8271 DFS Kit (Inc DNFS Rom)	£51.00 (a)
1770 (DFS without Rom)	£32.00 (a)
Acorn ADFS with utilities	£26.00 (a)

THIS MONTHS SPECIAL

1770 Kit (Inc Acorn Rom)	£38.50 (a)
Package Price	
Single (400K) Drive+ 1770 DFS	£121.00 (c)
Double (800K) Drive+ 1770 DFS	£199.50 (c)
NOW CHEAPER THAN EVER!	

ADVANCED COMPUTER PRODUCTS

Adv 1770 DFS or Adv Disc Tikit	£28.50 (b)
Advanced Disc Investigator	£23.50 (b)

UNIVERSAL DISCS

Up to 80T DSDD Clear plastic case inc.
Box of 10, Look! Only

WD1770/72	£12.90 (a)
6502A CPU	£4.65 (a)
65C02 Low Power CPU	£9.65 (a)

MEMORIES

4416-15NL (TMS or NEC)	£2.30 (a)
41464-12 (Solidisk 41254-12)	£4.50 (a)
41416-15 (Watford 48415)	£2.30 (a)
EPROMS VPP 12.5V (21V as available)	
27128-250ns	£3.30 (a)
27256-250ns	£4.20 (a)
27512-250ns	£9.45 (a)

TTL-DFS CHIPS ETC - Prices on

Request

PRINTERS

Panasonic KXP1081 Paper	
& Stand	£160 (d)
Epson LX86 100CPS, NLQ	£215 (d)
Epson FX800 160CPS, NLQ	£340 (d)
Canon 1080A 160CPS, NLQ	£230 (d)
BBC Printer Lead, Not required for	
KXP 1081	£6.00 (a)

MONITORS

Philips BM7502 12" Green	£68.55 (d)
Philips BM7522 12" Amber	£73.85 (d)
Hantarex CT9000 Med	
Res Colour	£170.00 (d)
Taxan KX1201 12" Green	£85.95 (d)
Taxan Supervision II	
12" Colour	£268.55 (d)
Taxan Supervision III	
12" Colour	£317.25 (d)

See the True Value - NOW -

ALL PRICES EXCLUDE V.A.T.

Mail order only to:

Cp microsystems

32-34, Surbiton Road, Kingston upon Thames,
Surrey KT1 2HX.
01-394 1452

(Answerphone - we're despatching orders, we'll ring back).

Carriage & Ins.- (a) £0.58, (b) £1.10,
(c) £4.00, (d) £6.96.

More than one item? All sent in one parcel.

Choose rate for your dearest item.

Add 15% VAT to goods &

carriage total price

ALL GOODS NORMALLY IN STOCK


Local Authority Orders accepted

PANASONIC YOUR PARTNER IN PRINTING

KX-P1081

10" 120 cps Dot Matrix Printer

- 120 cps Draft; 24 cps NLQ
- Near Letter Quality printing in all pitches
- Dip switch selectable IBM® Printer modes
- High resolution, dot-addressable graphics
- Friction feed and adjustable tractor are standard




£139

KX-P1082

10" 160 cps Dot Matrix Printer

- 160 cps Draft; 32 cps NLQ
- Near Letter Quality printing in all pitches
- Courier and Bold NLQ Fonts
- Dip switch selectable IBM Proprinter™ emulation
- High resolution, dot-addressable graphics
- Friction feed and adjustable tractor are standard



£159

PRICES ARE CASH WITH/ WITH ORDER and
Exclude Delivery and VAT
All Goods Covered by Manufacturers Warranty

MICROSOL
Ltd

01-739 5607

1-4 Christina Street London. EC2A 4PA.

MICRO USER CLASSIFIEDS

Has upgrading your BBC Micro given you hardware you no longer need? Or have changing interests left you with unwanted software? Then THIS is the place to advertise your surplus items. Our 179,000 readers are always on the lookout for a bargain and this is the first place they'll look!

An added bonus!

Your advert will be automatically displayed on MicroLink, the electronic mail service operated in association with Telecom Gold. This means it will be seen by thousands of computer enthusiasts who can send an instant response.

Ads will be accepted under the following conditions:

- This service is EXCLUSIVELY for the use of private readers. No trade ads will be allowed.
- To avoid encouraging software piracy, all ads will be carefully vetted before they are accepted.
- Ads can only be accepted on this form (or a photocopy of it).
- There is no maximum to the number of words you include. If there is insufficient room on the form, continue on a separate sheet of paper.
- The cost is 20p per word, with a minimum of 10 words.
- We GUARANTEE your add will appear in the April 1988 issue (on sale March 2) providing it is received by February 5.

● Juki 6100 daisywheel printer. Mint condition, boxed with instructions, BBC connector, wordprocessor foc £210. Tel: (0636) 813847. Southwell Notts. No. Offers.

● Janitor 16k utilities eprom for BBC micro with over 50 commands. Now just £9.99. All profits to Multiple Sclerosis, Chilworth, Southampton, SO1 7LR or see for details.

● Electron, plus 1, plus 3, View, Viewsheets cartridges, original software including database disc, games (some disc), mags, excellent condition £250. Tel: Reading (0734) 62687 (evenings).

● Master software, roms for sale including Genie Junior. Also HCR1 external rombox. Tel: (0527) 32613 or send sae to Jim Brook, 18 Upland Grove, Bromsgrove, B61 0EL.

● Master 128k, Acorn dual ds disc drives, guarantee, manuals £650 o.n.o. Tel: 0245-420045.

● BBC B 1.2os 1554 Watford DFS 40/80T and 40T disc drives in Plinth dot matrix printer, Prism modem, cassette recorder, Watford 32k rom/ram board with Basic II replay addcom and Micronet roms, separate keyboard £1000. Software including Mini Office II, Graphics Adventure Creator, Repton II, Portfolio, Monopoly etc, magazines and manuals £650. Tel: 0638-

741552.

● Boxed Interbase £35, ATPL rom board £25, Dumpout-3 rom £15, Watford DFS £10, Fileplus rom £15. Tel: Southampton 442289 after 6pm.

● VHF/FM Micro-Transmitter kit. Transmits onto a domestic radio range upto 1 mile, very small £9.95. Julian Cox, 11 Cheswick Drive, Gosforth, Newcastle Upon Tyne, NE3 5DF.

● BBC B cassetted, 5 educational 11 games cost £130 accept £50. Tel: 09603 73797.

● Torch Z80 second processor c/w software £95. Taxan 12" green monitor £35. WH Smith Data Recorder inc Vutype, Scrabble, Starfinder, Mr.Men £20. Tel: 09867 2465.

● Daisywheel printer, Quendata 1120 parallel interface, two daisywheels v.g.c. £110 o.n.o. or exchange for dotmatrix printer. Tel: Sunbury 788322.

● Wordwise plus £25, Graphics extension rom £15. Tel: 0384 270985.

● Wanted users manual for Star DP510 printer. Tel: Basildon 553839.

● Master 128 £250, 512 co-processor, Gem software, mouse £120. Dual 40/80T double sided disc drives £100. Taxan620 colour monitor £200. Manuals, magazines, soft-

ware, joysticks, data recorder etc. Tel: 06286 5062 (evenings).

● Master 128, manuals, 400/640k drive, Interword, ADT, Max, Super-Art, Amx Mouse, Office Mate+ master, joystick, 50+ games, Elite etc. Cost £1000 only £625. Tel: 0642 786468.

● BBC Master 128k single 40/80 DSDD Akhter drive, joystick, software both guarantees intact £450. Tel: 01 961 2837.

● BBC 32k Watford DFS, Solidisk 32k sideways/shadow ram expansion, manuals, software £230. Tel: Simon 0829 260476.

● Music 5000 bought 15/11/87, hardly used, still guaranteed £90. Tel: 0225 332696.

● Wanted Acorn Teletext Adapter urgently. Tel: Wetherby (0937) 63070.

● Wanted: Cumana 40 track single 5.25 disc drive. Tel: 059 585 673 evenings.

● BBC B 1.2os Watford DFS Torch Z80 twin disc pack, Perfect Writer, Calc Filer, Utilities £495. Green monitor £45. Tel: E.Grinsread (0342) 22594.

● Immaculate condition BBC'B' Inc.Dfs, Cumana 40/80T 400k Inc P.s.v drive, 14" cub colour monitor style 'D' free covers for monitor. Drive + hard computer cover + tilt

swivel monitor sandt + manuals worth £800+ accept £499 o.n.o. Tel: Anish 021 358 7271 after 5pm.

● BBC issue 7, dual 80T dsdd drive, colour monitor, Dfs replay, £200 worth of software, many discs, Eprom programmer, Eproms worth £1400 accept £800. Buyer collects. Simon Brown, 28 Broadacres, Bardon Mill, Hexham, Northumberland, NE47 7EF.

● Watford speech £20, 12 disc games £60, 50 tape games £100, 2 BBC Roms £20, Acorn 40 track disc-drive £30. Tel: 051 652 1862.

● BBC Master 128 twin 40/80T double sided drives. Mannesmann Tally MT80+ printer rom cartridges, mono monitor, software, discs £750. Tel: 01 747 1521.

● Latest Watford Lemodem plus kit. Exchange for latest Morley Teletext Adapter, power supply etc or offers. Tel: 01 399 6504.

● BBC B with colour monitor and cassette. Also software including Wordwise £250 o.n.o. Tel: 0273 720616.

● Master series Turbo upgrade, sensible offers accepted, extras. Tel: Bradford 607281 after 6pm.

● Solidisk 64kSWR new style 2 (two) extra rom sockets £25. Tel: 0427 873059.

PLEASE PRINT THIS AD IN THE NEXT MICRO USER

Cheque enclosed for £_____ (minimum £2 for 10 words)

Name _____

Address _____

I certify that any software offered for sale is original and not a copy

Signed _____

POST TO: Micro User Classifieds, Europa House, Adlington Park, London Road, Adlington, Macclesfield SK10 5NP.

LETTERS

£10 Prize letter

I READ with interest the letter from A.L. Gouch in the December issue of *The Micro User* giving a method of producing pauses at the printer end when sending data. Unfortunately there seems to be no provision in View for sending instructions to the printer.

It is possible however — you can create a special printer driver by answering the printer driver generator's Give the Code for obtaining "£" request with 19 27 10.

All that is then necessary to implement Mr Gouch's system is to define a footer as /£ and omit the subsequent ///.

This aspect of the Printer Driver Generator can be used for many purposes: For a back space, enter 8. For a circumflex accent, enter 8 " ^ ".

For an e with an acute accent, enter "e" 8 followed by the code for the accent, which will vary from one printer to another. To change the print colour, enter the appropriate code.

Any composite character or printer instruction can be obtained in this way. It's a pity

Printer control from View

that this very useful facility is limited to #, \$ and £, so that only three special codes can be used with any one driver. — D.V. Meader, London.

Computer studies

I WOULD like to express the disquiet that I felt when I saw Ms Capper's program in the December 1987 issue.

Did she learn to write code like that on a school computer studies course? If so, her program tends at first sight to support the assertion made on the same page by P. Jones that "computer studies should not be taught as a subject in its own right".

But I think that goes too far. Computer studies makes contributions to the greater understanding of our society and of the technology which is increasingly important in it. For this reason it is valuable.

What is not valuable is the Basic which is usually taught as part of it.

For the overwhelming majority of those who learn it, programming is a useless skill. It may even be harmful to the development of just those logical faculties which it is always claimed to benefit: Ms Capper's program is a fine illustration of this.

The best that you can say for Basic programming is that it can be fun — like crossword solving, but it has about the same practical value.

This has been recognised in the new GCSE syllabus, which permits schools to avoid programming completely if they wish in their examination work. Instead, it stresses the practical use of computers for such tasks as word processing, data retrieval and machine control.

Pupils who use computers in their jobs after leaving school will be using them in these ways, so what they have

Win a tenner

● Want to write to *The Micro User*? The address is: Letters, *The Micro User*, Europa House, Adlington Park, Adlington, Macclesfield SK10 5NP. Writers of the most interesting letters receive a £10 prize.

learnt might be useful to them.

Basic is unlikely to be more than a recreational interest, and only for a very small number of them at that.

Why waste lessons on something that would be better learnt in their spare time by those interested in it?

All of this may turn out to be of purely academic interest in view of the apparent position of computer studies in Mr Baker's proposed national curriculum.

For the moment, however, let's hear the view of teachers and pupils alike on this question: Should we teach Basic programming in computer studies courses? — Peter Kay, Haverfordwest, Dyfed.

Courtesy always pays

I BOUGHT a Morley Teletext Adapter from your stand at the recent *Electron* and *BBC Micro User Show* in London. I soon discovered that the support rom provided was not what it claimed to be, and I had actually been given two ATS roms.

I rang Morley and they were very apologetic and asked me to send one back to them for replacement.

When I did this I also queried a couple of points concerning the graphics dump on the utilities disc which I had not been able to get to work

properly with my printer.

I received a reply by return of post with the correct rom and, in their covering letter, as well as being apologetic they were also very helpful and made a genuine attempt to solve my problems.

So much so that they also sent me the new utilities disc in case the one I had was faulty.

In fact, it did not make any difference and I sent it back and then received a further letter from them with more suggestions. I believe my problem is now solved — a

printer dipswitch needed altering.

I would like to say how nice it is to deal with such a pleasant, courteous and helpful company. It is also very good business practice for them, as I will certainly be looking to purchase further items from them with confidence.

I would also like to mention that the Teletext Adapter is an excellent piece of equipment. — G.M. Robertson, Reigate, Surrey.

● It's good to know which companies provide real after-sales service.

Monster lurking in Zarch

I AM writing to you concerning the game *Zarch* which I bought recently and have played continuously — stopping only briefly to write this letter.

On the second wave I have come across a strange undocumented alien swimming around in the sea. It is a cross between a large crocodile and a dragon, and moves around in circles, half

LETTERS

◀ From Page 151

submerged. Has anyone else seen this creature or is the game going to my head? — **Stuart Cupit, Etchingham, E. Sussex.**

● Yes, we've seen it, and if you hit it you score 1000 points. It appears in every game and remains in place as each wave progresses until you see it and shoot it.

Unfortunately it doesn't stay in the same place for each game — but it does follow a particular positioning sequence from the initial boot-up.

In the first game it appears in a bay halfway to the map edge, north by northwest of the hoverplane launch pad near a sea-based radar station, but where it appears in subsequent games we don't know. Perhaps a dedicated reader will find out.

Viglen solution

I RECENTLY fitted a Viglen console unit to my BBC B and found that a few minutes after power-up the keyboard interrupts went berserk.

I phoned Viglen who suggested swapping over the 6522 VIAs. I tried this, but to no avail. However, I found that replacing the long curly keyboard lead with the original short link appeared to cure the problem — but then the case wouldn't fit.

I phoned Viglen again. They suspected a faulty keyboard lead and sent me two different ones: Another curly one and a long straight one. But both gave the same problem.

I thought that the problem may be due to RF interference or crosstalk, and they suggested shortening the cable. Unfortunately that didn't work either.

Finally a friend suggested that I use a parallel flat ribbon cable. So I phoned Viglen again, and they sent me a 1.5 metre cable they normally use for connecting up disc drives.

The cable was 34-way and

the keyboard connector was 17-way, but they fitted. Each signal was then separated by an unconnected line and to my surprise it worked perfectly — though it was not quite as pretty as a curly lead.

I would like to thank Viglen for their helpfulness, and to point out this possible solution to anyone who is having this problem with their console units. — **Stephen Murgan, Leystonstone London.**

Barny Bee bungle

I AM a great admirer of the *Get it Right!* listings, which have proved to be immensely useful since they were introduced, but with Barny Bee something is not quite right.

In no way can I get the checksums to agree for lines 360, 410 and 500. And in line 730, the data will not fully enter as one group unless the DATA command immediately follows the line number.

All that results from running the program is a Bad Mode at line 60. I transferred the program to tape and ran it, with more success, but with no left-right-up-down capacity and an ultimate message of No Room at line 640.

Number Invaders typed in perfectly and runs without trouble. — **S.Moorcroft, Dukinfield, Cheshire.**

● We investigated this because our version runs perfectly, and it turns out that the program was crunched to remove spaces before we got it.

This means certain lines will not produce the same checksums when typed in as printed, nor will they work correctly. The faulty lines should be:

```
360 IF?88F=&C3 I%=Y%-2:P
ROCC:ENDPROC ELSE ENDPROC
410 DEFPROC F:?&A01=24:??
A07=8:??&A0B=2 MOD256:??&A10
=Z DIV256:CALLB:ENDPROC
500 IF1=FALSE PROC
```

The problem with your Data statement is tied to the No

Reminders in View

I KEEP a number of different View files on disc containing letterheads, addresses, invoices and so on. I have found it useful to have a note in each giving reminders of details such as form length and printer settings.

If you use the first three or four lines of the View file to

set HM, TM and BM, any reminders can be typed into these lines before the blank form is saved to disc.

These reminders will appear on the top of the screen each time the blank form is loaded, but will not appear on the printout. — **D. Driver, Winscombe, Avon.**

room error, because if you type a space after every line number you are wasting bytes, and this program — which is already tight on space — runs out of memory.

The addition of one unnecessary byte every line can make a considerable difference.

We assume that program listings are typed in with the AUTO line numbering function in operation, which gives the space between the line number and the text you type in — as shown in the magazine listing — without actually inserting it into the program.

If you do send us a listing, never use any form of line crunching on it because although the program may work it will not be possible to type it in correctly.

Pattern display

I THOUGHT the Rules for Wordwise Plus by Gary Crawford, in your July 1986 issue was a good idea, but I have not been able to make the coloured bar effect work on my BBC Micro. Wordwise Plus will not accept:

```
OS'FX155,(1+48)''
```

in any form as an embedded command. — **D.G. Paterson, Epsom, Surrey.**

● Unlike other languages on the BBC Micro, the operating system will not accept a

command containing a calculation — you can only send simple numbers.

The letter meant that you should choose the colour you want, add 48 to it and put that in place of the the (col+48). For example, if n is 1 you would use OS'FX155,49' and get red vertical lines on the screen in preview mode.

From BBC to Z88

I HAVE just finished reading *Computing on the move* by Dave Watts in your January 1988 issue. Unfortunately it has come about a month too late. I bought myself a Z88 in October and have been quite delighted with it.

I realised almost immediately that the major limitation was not being able to transfer data between it and the BBC Micro so I set about writing my own routines and making a lead.

It was a pity that in Dave Watts' article there was no mention of transferring data to the Z88. I would have thought that this was equally important especially with the direct compatibility of Pipedream and View Professional.

Pipedream and any other BBC Micro word processor are also compatible provided plain text is used.

Unfortunately Pipedream has one annoying feature —

LETTERS

plain text files have a Return at the end of each line. This is not a problem if you are a View or a View Professional user, but a bit annoying for users of other word processors.

This will also cause problems if you are editing Basic programs in Pipedream and the line exceeds 72 characters.

A suggestion to add to Dave Watts' article could be that instead of SPOOLing, the information is BPUT to the file. This stops the odd control characters upsetting the screen display and not going to the disc file as was intended.

Another interesting feature of the Z88 is that the diary files are plain text and can be created using a word processor. It means therefore that a diary can be created on a BBC Micro and then transferred to the Z88 for immediate use.

The proof of the pudding is that — yes wait for it — I wrote this letter on the bus coming home from work and then transferred it to the BBC Micro for final correction and printing. — **Jeff Moon, Gateshead, Tyne and Wear.**

Building boots

MY micro is a BBC B and I am completely frustrated as to how to build a !boot file, as I am just starting out in computers.

Please could you explain how to build one and any way to get more than one on to the same disc at the same time? — **S. Auty, Stroud, Glos.**

● There are two easy ways to create a !boot file. Either issue the command:

```
*BUILD !boot
```

and then type in each command line, or use a word processor that can save as pure Ascii such as Wordwise, Mini Office II or a spooled View file, and save the file as !boot.

Once you've done this, type

Ultimate solution?

The problem posed in the Education letter The slow answer from your December 1987 issue can neatly be solved using continued fractions.

A brief outline of the principle is given below with a program listing to solve the problem.

For the fraction .612015 the best approximation with three-digit numbers is 489/799 and is a unique solution in the sense that the next best, 377/616, differs in the last decimal place.

Type in the program and run it. Enter your target value and the degree of error your answer should be correct to — for a target of .612015 use

the error value .0000005.

The display gives the number of iterations required, the two values calculated and how long it took — usually less than 0.5 seconds. — **M.J.**

```
10 DIM P%(50),Q%(50)
20 REPEAT
30 INPUT "Target",A
40 INPUT "Error",E
50 TIME=0
60 A%=A
70 XA=1/(A-INT A)
80 B%=XA
90 P%(0)=A%
100 Q%(0)=1
110 P%(1)=B%*P%(0)+1
120 Q%(1)=B%
130 FOR I%=2 TO 20
140 XB=1/(XA-INT XA)
150 B%=XB
160 P%(I)=B%*P%(I-1)+P%(I-2)
170 Q%(I)=B%*Q%(I-1)+Q%(I-2)
180 IF ABS(P%(I)/Q%(I)-A)<E J%=I:I%=20
190 XA=XB:NEXT
200 T%=TIME:@%=7
210
220 @%=10:PRINT
230 UNTIL FALSE
```

£10 Prize letter

Brookfield, Stapleford, Cambridge.

● Thank you, that just about wraps it up for the Slow answer, unless you know any better...

*OPT4,3 when the disc is in the drive to set the boot option to Exec. You can see which option is set when you catalogue the disc.

Four boot options are available: Off (*OPT4,0) does nothing when the disc is booted with Shift+Break, Load (*OPT4,1) loads the file called !boot, Run (*OPT4,2) *RUNs the machine code program called !boot and Exec performs the *EXEC command on the text file called !boot.

From this you can see that there can only be one boot file on disc because only one file can be called !boot.

Archimedes annoyance

I BOUGHT an Archimedes 310 with a colour monitor one and a half months ago and became annoyed when I saw the release of the PC Emulator, because I contacted my supplier who said Acorn is releasing this emulator for £99, but the price difference between a

310 and a 310M is £69.

Why levy an excess of £30 on people who were unable to take this offer up when buying? Why charge someone who has taken the risk an extra £30? By the way, my 5.25in Opus drive works without any modifications. — **S. Oakley, East Dereham, Norfolk.**

Bug lurking in Ludo

I'VE only just got around to typing in John Dewar's Ludo program from your May 1987 issue and was dismayed to find I couldn't get it to work on my BBC B.

Everything was fine until the die had been rolled to see which player was to start, and then I was confronted with No room. This occurred even when I moved PAGE to &E00.

The trouble lay with the statement PROCmess("") in line 870. DEFPROCmess(G\$) uses the statement G=INSTR(G\$,"+-")-1 in line 550 and this instruction has a known bug in Basic I (User

Guide page 281).

If the second string is longer than the first — which it is in this case — the effect is, as the User Guide puts it, fatal.

The cure was simple. Put a space between the inverted commas — PROCmess(" "). The same applies to the identical statement in line 190. Now all is sweetness and light.

I thought I'd let you know this in case there are any more would-be Ludo players tearing out their hair over this program. — **J.L. Bulmer, Brighstone, Newport.**

£10 Prize letter

Speed reading from roms

In the December issue of The Micro User A.S. Knights of Watford gave a very useful function for reading bytes

Turn to Page 154 ►

LETTERS

◀ From Page 153

from sideways roms.

As written it is a little slow for use within, say, a rom scanning utility, but fortunately can be speeded up considerably.

Much of the time lost is in the DIV and MOD operations needed to split up the value of location.

In fact the MOD could be omitted anyway, since the ? operator places only the least significant byte in memory, but in this particular case we can also dispense with DIV.

According to the Advanced User Guide, memory locations &F8 and &F9 are not used by Operating System 1.2, which is the most common version in the BBC B. So we can safely use the ! operator, giving Listing I. This is faster and still easy to follow.

A further saving can be made by not re-assigning the values to new variables in the function, but placing them directly where required within the definition as shown in Listing II. Shortening the name gives a further small speed increase.

The approximate time savings over the original listing are 35 per cent for Listing I and 65 per cent for Listing II.

```
1000 DEF FNreadrom(location,socket)
1010 !&F6 = location
1020 Y% = socket
1030 =USR(&FFB9)AND&FF
```

Listing I

```
1000 DEF FNr(!&F6,Y%)=USR(
&FFB9)AND&FF
```

Listing II

— Peter Vasey, South Shields, Tyne & Wear.

All Greek

I AM trying to learn Greek and would like to know if there is a company that sells learning programs for that language. Can you help? — B. Harley, Meudon, France.

● We don't know of any learning packages for Greek, but perhaps a reader does. Any takers?

Command error

I HAVE entered the listing of the Backing up to tape program from the January issue of The Micro User and got the checksums correct, but have encountered some problems.

The first is simple: At line 180 we have PROCcommand but at line 280 we have DEF PROCcmdnd which results in the No such FN PROC error.

However, when I run the program the facilities to transfer disc to tape produces Bad option at 1350. My User Guide hasn't heard of this error so I'm stuck, are you able to help?

I notice at line 1460 there is read_attr% = FNf_type(o\$) but as read_attr% appears nowhere else, this seems odd. My disc system is an Opus Challenger 3 — is this likely to be the problem? — Alan Woodcock, Twickenham, Middx.

● We're afraid you're quite right about the PROCcommand mix up — just change line 280 to conform to the name in line 180.

The Bad option error is due to the Opus drive. Unfortunately we can't guarantee that programs will work with DFSs which don't conform to Acorn's standards.

Upgrade for more words

I AM running short of memory when using Computer Concepts' Inter-Word and Inter-Sheet packages and am con-

sidering upgrading from a BBC B to a Master Turbo.

I fitted a Watford Electronics 32k shadow ram card into my computer and this increased the bytes free from around 4,700 to 25,000.

However, I now use a larger spreadsheet and the familiar No room message is beginning to appear.

I am considering the Master Turbo because of its processing speed and its 192k memory capacity, but I am unsure if the word processor and spreadsheet chips can make use of the extra memory on the turbo card.

I read that Acorn's View word processor relocates itself to make more memory available when it's loaded, but InterWord won't work on the second processor.

Does the turbo upgrade prove beneficial when used with InterWord and Inter-Sheet, and if not can you tell me what the bytes free message would read on an ordinary Master 128?

As I am quite happy with my BBC Micro — other than the memory shortage — and I don't want to upgrade unnecessarily. Would the Solidisk Twomeg 128k or Fourmeg 256k cards be more suitable for curing my problem, as their advertisement states that the Inter series is compatible? — Philip Tamin, Northolt, Middx.

● To answer your last question first, the Solidisk sideways ram upgrades would not help at all as the software is not written to use it, and you already have a shadow screen.

InterWord has about

28,000 bytes free on the Master, which we assume is not much different from what you have now.

Stating that the Master Turbo has 192k available is a little misleading as 64k is in sideways ram — which would not be used — 32k is shadow screen and private ram, and the remaining 96k is split 32k for the Master main memory and 64k to the Turbo.

Only the last two can be used at any one time by word processing software unless it has been specially written. On the second processor View gains roughly another 14k of memory. However, we don't know of any spreadsheet that relocates itself to gain memory.

As far as we can see, your best bet is to optimise your spreadsheet so that it is smaller, and use InterWord's multi-file option for large documents.

Scrolling stopped

I TYPED in the Text scroller routine from the November 1987 issue of The Micro User. When run it should draw a graphics window and scroll text in it, but when I ran the program an error report was given — Missing, at line 170.

I tried putting a comma in various places, but the final result was unsuccessful. Sometimes it reported other errors.

I don't know what's going on. Could you explain? — Marc Lawrence, Edgware, Middx.

● You have probably typed the number zero instead of the letter O in the variable O%.

Remember that error reports are not always accurate — the computer cannot know exactly what you meant to type when you made the error, and in your case there is no missing comma but something else is wrong.

Remember, too, that sometimes an error message can refer to the wrong line.

ALL programs printed in this magazine are exact reproduction of listings taken from running programs which have been thoroughly tested.

However, on the rare occasions when mistakes occur corrections are published as a matter of urgency. Should you encounter error messages when you type in a pro-

gram, they will almost certainly be the result of your own typing mistakes.

Unfortunately we can no longer answer personal programming queries concerning these mistakes. Of course letters about suggested errors will be investigated without delay, but any replies found necessary will only appear in the mail pages.

Turn your BBC Micro into a teletext receiver!



Join the 3.5 million households who regularly use teletext. The thousands of pages on Ceefax, Oracle and 4-Tel cover everything from programme details and up-to-the-minute news to share prices and football results. But if you have a BBC Micro you can do much more than flash from page to page. With the Morley Teletext Adapter and a normal TV or monitor, you can:

- Store pages in memory
- Download the FREE telesoftware (updated every week)
- Use the real-time clock in your programs
- Automatically load associated pages each time you select a page from the menu – considerably speeding up access time

The Morley Teletext Adapter is simple to install – it plugs straight into the user port. The software is menu-driven with easy-to-follow instructions – it even automatically tunes itself to the required channel.



What you get

The stylish teletext unit, 16k ATS rom, 16k utilities rom (including printer dumps), two manuals and a utilities disc. An optional power supply is available.

NORMAL
PRICE

£127

SPECIAL OFFER PRICE

£99.95

Note: If you use your BBC Micro's auxiliary power socket for your disc drive, or any other external device, you will need a power supply which we can provide for £9.95.

All prices include VAT and P&P.

IMPORTANT: The BBC points out that a teletext adapter, like a TV set, will not work satisfactorily without a good outside aerial. Nor will it function correctly if you experience reception problems such as ghosting.

They emphasise that these problems only affect a few areas of the country. However if you have any doubts as to the quality of signal available in your area you should contact the BBC Technical Support Service on 01-927 5040.

TO ORDER PLEASE USE THE FORM ON PAGE 159

4 exciting compilations of the very best programs from the pages of *The Micro User*

TEN^{of the} BEST!

We've brought together the most popular listings which have been published over the last year and created four packages each devoted to a particular subject area. There's entertaining games, handy utilities, clever graphics utilities and powerful ram and disc utilities – all ready for you to put to use without the need for any typing in! You can also list and adapt nearly all the programs – an excellent way to improve your programming skills.

Ten of the Best Ram and Disc Utilities

Ram Arrays – Extend the memory available for your arrays in Basic.
Printer Buffer – No more waiting for your printer to finish printing with this great utility.
Prommer – Put your own Basic programs in rom for instant access.
Disabler – Having problems with duplicate rom commands? Cancel out roms with this utility.
MOT – Keep your discs in top magnetic condition and rescue corrupted programs.
Disc Copy – No more single file copies - this utility makes use of the whole memory.
Disc Catalog – Keep track of your disc files with this excellent cataloguing program.
Disc Protect – Professional disc protection is yours using this excellent utility.
Dual Catalog – Get 56 files on one disc surface with this utility.
Safe Save – Prevent overwriting a backup file with this clever checking routine.



Disc price: £4.95

Ten of the Best Graphics Utilities

MicroWorks – Create impressive Mode 4 screens with this superb graphics program.
Pixel Editor – Fine-tune screen pictures in any mode with this excellent editor.
Flood Fill – Fill screen areas with solid colour at remarkable speed.
Mode 7 Dump – Print out your Mode 7 screens onto any Epson-compatible printer.
Slim Characters – Get 40 characters per line in Modes 2 and 5.
Special Fonts – Display 192 fonts on screen with this easy-to-use utility.
Printer Control – Modify your printer styles easily from your wordprocessor.
Dual Screens – Give your programs the professional look with this double-screen display.
Characters – Create your own character sets with this useful utility.
Charprint – Use this clever routine to print your own character sets to Epson printers.



Disc price: £4.95

Buy all
four discs for
£17.80
and save
£2!

Ten of the Best Games

Dino – Ride the gobblosaurus past all the perils in this magnificent fast-action game.
Hunkie Egg – Clamber up the ladders and run along the levels to gather up the eggs.
Diamond Quest – Collect all the diamonds in this superb arcade adventure.
Stellar Rescue – Defeat the powerful gravity to land your spacecraft in one piece.
Fruit Machine – Test your skill and luck on the one-armed bandit with this addictive simulation.
Karate Warrior – Delve into the mysteries of the martial arts as you aim to get a black belt.
Maltese Cross – Try your hand against the computer in this classic domino game.
Othello – Entertain yourself for hours with this very popular oriental board game on your micro.
Witch Hunt – Help Olive search the maze to find the 42 keys of Transportal.
Soccer Manager – Take on the soccer club's top job in this gripping game of skill.



Disc price: £4.95

(Also available on tape for only £3.95)

Ten of the Best Utilities

Text Compressor – Use this excellent utility to reduce the space held by your strings.
Variable Compressor – Reduce the size of your variables automatically to save space and improve speed.
Line Compressor – Save space in your programs by creating multi-statement lines.
BOS Editor – Make editing your Basic program easy with this on-screen editor.
Basdat – Convert disc files into Basic data statements and add the resultant lines automatically.
Basic Repairer – Rescue your programs after the Bad program error with this useful little utility.
Line Editor – Use a single-line word processor in your INPUT statements without changing your programs.
Circles – Use this fast and powerful routine to quickly draw filled and unfilled circles.
Events – Make your programs respond to real-time events with interrupt-driven Basic routines.
Stripper – Remove the line numbers from your Basic programs to allow editing within a word processor.



Disc price: £4.95

PLUS


Every package comes with an easy-to-use machine code version of the Get It Right checksum to enable you to check listings you've typed in.

At only **£4.95** each the Ten of the Best compilations represent superb value for money. But you can obtain all four for **£17.80** and save **£2!**

Don't delay – turn to the order form on page 151 to take advantage of this excellent offer.



5 fun-packed educational programs
... for young children everywhere

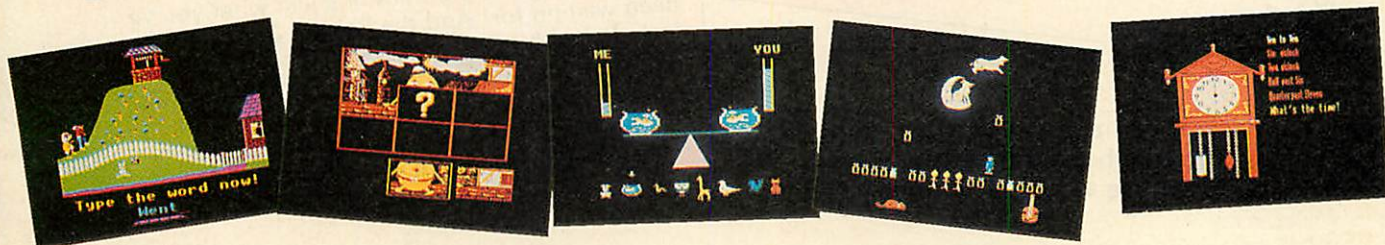

This delightful collection of programs is based around children's favourite Nursery Rhymes. There's plenty of sparkling colour, sound and captivating animation to keep them riveted – and as they play they'll be learning all the way.

- ★ Tell the time with Hickory Dickory Dock.
- ★ Assemble the jigsaw in Humpty Dumpty.
- ★ Learn to spell with Jack and Jill.
- ★ Match the animals in See Saw Marjory Daw.
- ★ Play an exciting game in Hey Diddle Diddle.

Children from two to nine will be entertained for hours with these interactive programs. Don't miss out on this beautiful gift for your family – and at a very special price.

ONLY £5.95 (cassette)

£6.95 (5¼" disc)

£7.95 (3½" disc)

Suitable for BBC Micro, B+, Master and Master Compact


TO ORDER PLEASE USE THE FORM ON PAGE 159

You can save
up to £14
on these . . .

3 TANTALISING TITLES FOR YOUR BBC MICRO!

Ransack

SAVE
UP TO **£7!**



Control AI, the globular droid, in a revenge mission against the eight rebellious planets of the Ryvian system. Ransack, the latest game from top programmer Peter Scott, is a high-speed arcade game that will tax your skill and reactions to the limit!

Also available on 3½" disc exclusively for The Micro User

"This is one for every collection"
- *Guilder, The Micro User, November 1987*



Please note: If you are a subscriber, you can renew your subscription early to take advantage of these very special offers.

**Computer Hits
10 Vol. 4**

SAVE
UP TO **£6!**



Some of the very best games for the BBC Micro have been crammed onto two cassettes – and they're guaranteed to keep you entertained for months!

There's Repton, Thrust and Deathstar from Superior Software, Killer Gorilla, The Mine and Ghouls from Micro Power, Psycastria and Bug Eyes 2 from Audiogenic, Zalaga from Aardvark and Bagger from Alligata.

PLUS two extra games: Superior's Galaforce and Karate Combat – making a grand total of 12 different games.

This is a compilation that's not to be missed!

**Life of
Repton**

SAVE
UP TO **£4!**



Here's an exciting new collection of screens for you to try and crack! Start out as a baby and work your way through the five different life stages, from infancy to old age – a total of 40 new mazes with a dazzling range of graphics. It's just what you've been waiting for! And the Repton 3 main program is included with every copy.

"If you're a fan, that alone should be enough for you to go out and buy a copy...Sound 10, Graphics 10 Playability 9, Value for Money 10 Overall 9."
- *Ian Waugh, The Micro User, February 1988.*

Suitable for	Product	Format	RRP	Special reader offer	YOU SAVE	Offer including subscription	YOU SAVE
BBC Micro	Computer Hits 10 Vol. 4	Tape	£9.95	£6.95	£3	£18.95	£6
BBC Micro	Ransack	Tape	£9.95	£6.95	£3	£18.95	£6
BBC Micro	Ransack	5¼" Disc	£11.95	£8.95	£3	£20.95	£6
BBC Micro	Ransack	3½" Disc	£14.95	£11.95	£3	£22.95	£7
BBC Micro	Life of Repton	Tape	£6.95	£5.45	£1.50	£17.95	£4
BBC Micro	Life of Repton	5¼" Disc	£7.95	£5.95	£2	£18.95	£4
BBC Micro	Life of Repton	3½" Disc	£9.95	£7.95	£2	£20.95	£4

TO ORDER TURN TO THE FORM ON PAGE 159

★ Special price if accompanied by subscription or renewal

Valid to February 29 1988
Overseas orders sent Airmail
Orders subject to availability
Please tick items in box below

Annual magazine subscription £ p

	New	Renewal
UK £15 2001	2002	
Europe (incl Eire) : Surface £25 2365	2114	
Overseas Surface £31 2366	2367	
Overseas Air £42 2004	2113	

Commence with _____ issue

Annual subscription for cassettes and discs

	UK	Europe/Eire	Overseas
BBC 'B' cassette	£35	£45	2005
5.25" disc 40T	£50	£60	2006
5.25" disc 80T	£50	£60	2007

Commence with _____ (state month)

Renewals

	UK	Europe/Eire	Overseas
BBC 'B' cassette	£35	£45	2009
5.25" disc 40T	£50	£60	2010
5.25" disc 80T	£50	£60	2111

Computer Hits 4

(see page 158)

Cassette	★ £3.95	£6.95	2096/7
----------	---------	-------	--------

Ransack

(see page 158)

Cassette	★ £3.95	£6.95	2098/9
5.25" disc	★ £5.95	£8.95	2100/1
3.5" disc	★ £7.95	£11.95	2102/3

Books

BBC Basic	★ £1.25	£5.95	2084/5
Sound and Graphics	★ £1.25	£5.95	2086/7
Both	★ £1.90	£11.90	2088/9

Add £1 for Europe (inc Eire). Add £2 Overseas per book

The Life Of Repton

(see page 158)

Cassette	★ £2.95	£5.45	2090/1
5.25" disc	★ £3.95	£5.95	2092/3
3.5" disc	★ £5.95	£7.95	2094/5

Acornsoft Specials

Language Roms

BCPL Bundle	£29.95	2045
-------------	--------	------

Add £5 for Europe (inc Eire), £19 Overseas

Forth	£19.95	2046
-------	--------	------

Add £2 for Europe (inc Eire)/Overseas

Logo	£29.95	2047
------	--------	------

Add £4 for Europe (inc Eire), £15 Overseas

Education

ABC, Workshop, Talkback and Spooky Manor (four cassettes)	£9.95	2048
-----------------------------------------------------------	-------	------

Music

Creative Sound Book	£4.95	2049
Two 5.25" discs 40T	£3.95	2056
Two 5.25" discs 80T	£3.95	2057

Games

Revs, Revs 4 Track and Aviator (3 cassettes)	£9.95	2050
----------------------------------------------	-------	------

Add £4 for Europe (inc Eire), £7 Overseas

Bargain Magazine Bundles

April 86 - December 86 (9 complete issues)	£6.90	2079
Add £10 for Europe (inc Eire). Add £20 for Overseas		
January 87 - June 87 (6 complete issues)	£4.60	2023
July 87 - December 87 (6 complete issues)	£4.60	2024
Add £6 for Europe (inc Eire). Add £12 for Overseas		

Micro User back issues

UK £1.75	January 1988	2410
Europe inc. Eire £2.25	February 1988	2411
Overseas £3.75		

Monthly cassettes/discs

	BBC B	5.25" disc	40 track	80 track	3.5" disc
	£3.95	£4.95	£4.95	£4.95	£7.75
Arena	Oct	2496/99			
Dune Hunter	Nov	2600/03			
Santa + Snowman	Dec	2604/07			
Barney Bee	Jan	2608/11			
Pinball	Feb	2612/15			
Pipeline	Mar	2616/19			

Ten of the Best (see page 156)

Games	Cassette	£3.95	2131
	5.25" Disc 40TR	£4.95	2132
	5.25" Disc 80TR	£4.95	2133
Basic Utilities	5.25" Disc 40TR	£4.95	2134
	5.25" Disc 80TR	£4.95	2135
Graphic Utilities	5.25" Disc 40TR	£4.95	2136
	5.25" Disc 80TR	£4.95	2137
Ram and Disc Utilities	5.25" Disc 40TR	£4.95	2138
	5.25" Disc 80TR	£4.95	2139
All Four Discs	5.25" Disc 40TR	£17.80	2104
	5.25" Disc 80TR	£17.80	2105

Morley Teletext Adapter (see page 155)

Teletext Adapter (40 track utilities disc)	£99.95	2074
Teletext Adapter (80 track utilities disc)	£99.95	2075
Power Supply	£9.95	2054

Add £4 for Europe (inc Eire). Add £7 for Overseas

The Sound Master (see page 18)

	£14.99	2083
--	--------	------

Add £2 for Europe (inc Eire). Add £7 for Overseas

Disc Storage Box

(holds up to 60 5.25" discs) £4.95 2052

Knitwear Designer

BBC 'B' Cassette	£8.95	2031
5.25" Disc	£9.95	2032
3.5" Disc	£10.95	2051

Add £2 for Europe (inc Eire). Add £5 for Overseas

Nursery Rhymes

BBC 'B' cassette	£5.95	2070
5.25" disc 40T	£6.95	2071
5.25" disc 80T	£6.95	2072
3.5" disc	£7.95	2073

(see page 157)

Mini Office II

BBC B, B+	Cassette £14.95*	2368
	5.25" disc 40T £16.95*	2369
	5.25" disc 80T £16.95*	2370
BBC Master	5.25" disc 80T £19.95*	2028
BBC Master Compact	3.5" disc £21.95*	2029

Instant Mini Office II

4x32k Rom Board £59.95† 2372

* Add £2 for Europe (inc. Eire). Add £5 for Overseas

† Add £3 for Europe (inc. Eire). Add £8 for Overseas

Fun School

	BBC B	5.25" disc	40 track	80 track	3.5" disc	5.25" disc Master
	£3.95	£4.95	£4.95	£4.95	£6.95	£4.95
Age 2-5	2338/41					2076
Age 5-8	2342/45					2077
Age 8-12	2346/49					2078

Micro User Binders

UK £4.95, Europe (inc Eire) £8.25, Overseas £10.25	2221
----------------------------------------------------	------

Dust Covers

BBC B & B+	£3.95	2220
BBC Master	£3.95	2222
BBC Master Compact	£3.95	2224

Readers in Europe (inc Eire) add £2. Overseas add £4 per item unless otherwise indicated

Don't forget to fill in your name and address overleaf.

TOTAL

**You can also order
by phone, Prestel or
MicroLink/Telecom Gold**

- Any of the goods listed here can be ordered by telephone.
- Micronet subscribers and other users of Prestel can also use the Prestel mailbox.
- MicroLink subscribers and other users of Telecom Gold can also use the MicroLink mailbox.

Orders: 0625 879920

24 hours

Enquiries: 0625 879940

9am-5pm.

Prestel

Key Page 89, then send your order to:

614568383

24 hours

MicroLink/Telecom Gold

72:MAG001

24 hours

Fax Orders

0625 879966

24 hours

*Don't forget to quote your credit card
number AND your full address.*

Payment: please indicate method (✓)

☐ Access/Mastercharge/Eurocard/Barclaycard/Visa

☐ Cheque made payable
to Database Publications Ltd.

Expiry Date

____/____

BLOCK CAPITALS PLEASE

Name _____

Address _____

_____ Post Code _____

Tel: _____

Signed _____


Please allow 28 days for delivery

**The Micro User,
FREEPOST,
Europa House,
Adlington Park,
London Road,
Adlington,
Macclesfield SK10 5NP.**

**NO
POSTAGE
NEEDED
(IF POSTED IN UK)**

TUCK INTO FLAP

Don't forget to provide: Your address, your cheque/credit card No.
If you've ordered discs have you indicated which format?

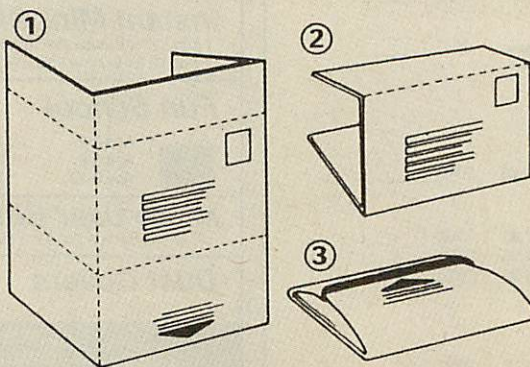

Leaky listings solutions

The variable *num\$* in line 180 should be in lowercase:

```
180 L=LEN(num$)
```

When going backwards in a FOR...NEXT loop you need the STEP command. In line 190 it should be STEP -1:

```
190 FOR n=L TO 1 STEP -1
```

There were two mistakes on line 200. Firstly the 1 must be in quotes because we're checking for a character not a

number and, secondly, there shouldn't be a space between PROC and ans:

```
200 IF MID$(num$,n,1)="1" PROCans
```

The wrong variable is specified following the NEXT in line 210. It should be *n* not *L* and need not be there at all:

```
210 NEXT n
```

It's not a mistake, but the variable *L* used in lines 180, 210 and 260 is badly chosen as it can easily be confused with the number 1.

Another point to remember is not to leave too many spaces in strings. An example of this is line 220 where the spaces in the string should be replaced using the SPC command. This makes your spacing more defined and it is a lot easier for other people to type in your printed listings.

Finally, you should have noticed that the program in fact converts from binary to decimal, so the REM statement in line 100 is wrong:

```
100 REM Binary to decimal converter
```

PCB	Design on BBC, store on disc, plot on HI-80 or HPGL compatible, print on Epson compatible dot matrix	£20
OHP	Lay out view foils on screen, store on disc, mix design from disc plot on HI-80 or HPGL compatible	£20
CALC	30 function complex number calculator programme. Enter & display (x+jy) or (z<0) format	£10

VINDEREN ASSOCIATES
PO BOX 130, Belfast BT9 6NB.
Tel: 0232 660203/667885
MicroLink Mailbox MAG 11652

CONTRACT BRIDGE BRIDGE-MENTOR II VERSION 1.10

"the best offering we have seen for the bridge player so far" BRIDGE CLUB REVIEW
"an ideal teaching aid" ACORN USER
"One of the best serious games programs" MICRO USER

The internationally acclaimed system for the COMPACT/MASTER /BBC/ELECTRON that can really improve your standard of play. Practise your bidding. Perfect your card-play. Create your own archive of interesting hands.

With high resolution colour graphics and sound, BRIDGE-MENTOR II guides you, step-by-step, through expertly analysed hands. A host of features including the spectacular "AUTOPLAY" option. The package now includes the famous "Challenge" hands archive... in total over 60 testing hands to improve your game... with unlimited scope for more!!!

Now with comprehensive 24 page on-line user guide

BRIDGE-MENTOR II Version 1.10

Licensed copies available for all MASTER/BBC/ELECTRON models with 32k + DFS/DFS and MASTER COMPACT/ELECTRON (64k +) with ADFS.


5.25" Disc (DFS/ADFS) £17.50

3.5" Disc (DFS/ADFS) £19.50

Original Dual Cassette Version £12.00

Please state 40/80 track and DFS where relevant

Cheques to: MINIC BUSINESS SERVICES, 12 WOBURN CLOSE,
BUSHEY, HERTS WD2 3XA.



HARDWARE, SOFTWARE & PERIPHERALS AT DISCOUNT PRICES

Master 128K only £400	Archimedes A305 Base £725
Master 512K Upgrade £215	Archimedes A305 + Mono Monitor £775
Master Compact £368	Archimedes A305 + Colour Monitor £925
Master Compact+TV modulator £382	Archimedes A310 Base £799
Master Compact+Mono monitor £415	Archimedes A310 + Mono Monitor £849
Master Compact+Colour monitor £570	Archimedes A310 + Colour Monitor £999

PRINTERS (All printers are supplied with lead state model)

DMP3000 (105 cps 80 col.) £166	Citizen MSP10E (160 cps 80 col.) £281
Citizen 120D (120 cps 80 col.) £184	Citizen MSP15E (160 cps 136 col.) £322
DMP3160 (160 cps 80 col.) £201	MP200 (200 cps 80 col.) £327
MP165 (165 cps 80 col.) £207	DMP4000 (200 cps 132 col.) £339
Star NL10 (120 cps 80 col.) £235	LQ3500 (24 pin) (160 cps 80 col.) £339
Citizen LSP100 (150 cps 80 col.) £241	* NEC P2200 (24Pin) (168 cps 80 col.) £399 *

MODEMS

Nightingale with Commstar rom £90	Pace Series 4 21235 V21/23 £255
Pace Linnet V21/23 £135	Miracle WS3000 professional V21/23 £290
Miracle WS4000 V21/23 £160	

DISCS

	10	25	50
5.25" DS/QD 80 track £7.00		£15.00	£25.00
3.5" DS £15.00		£35.00	£60.00

EDUCATIONAL PROGRAMS

	Tape	5.25" disc	3.5" disc
Typing Tutor £12.95		£14.95	£15.95
Early Maths £7.95		£9.95	£10.95
Early Words £7.95		£9.95	£10.95

NEW AMSTRAD PCW 9512 WORDPROCESSOR:

At last the new PCW model with a 20 cps daisywheel printer, Locoscript 2, LocoMail, LocoSpell, CP/M Plus etc.

RSP £499 + VAT. Our Price £459 + VAT

AMSTRAD PC1512 AND PC1640 RANGE AT LOWEST PRICES:

Prices start at only £348 + VAT

(Save up to £159 + VAT dependant upon model plus Software Vouchers for £200)

This is a sample of our extensive range. Please ask if the product you want is not listed.

ALL PRICES INCLUDE VAT

Send cheques to:

WILLOW SOFTWARE

Mail Order Dept (MU 2)

The Willows, Wrington Lane, Congresbury, Bristol BS19 5BQ

Tel.: (0934) 876031 (2 lines & Ansaphone out of hours)

Offers available for a limited period & subject to availability. Phone for best price, we always try to give you the best deal.

FREE POSTAGE

POOLSWINNER II

THE ULTIMATE POOLS PREDICTION PROGRAM

- **MASSIVE DATABASE** Poolswinner is a sophisticated Pools prediction aid. It comes complete with the largest database available - 22000 matches over 10 years.
- **PREDICTS** Not just SCOREDRAWS, but ALWAYS, HOMES and NO SCORES.
- **SUCCESSFUL** SELEC guarantee that Poolswinner performs significantly better than chance.
- **ADAPTABLE** Probabilities are given on every fixture - choose as many selections as you need for your bet. The precise prediction formula can be set by the user - you can develop and test your own unique method.
- **SIMPLE DATA ENTRY** All team names are in the program. Simply type in the reference numbers from the screen. Or use FIXGEN to produce fixture list automatically (see below).
- **LEAGUE AND NON-LEAGUE** All English and Scottish League teams are supported, and also the non-league sides often used on pools coupons.
- **PRINTER SUPPORT** Full hard copy printout of data if you have a printer.

PRICE £15.00 (all inclusive)

NOW AVAILABLE

FIXGEN 87/8

AT LAST! No more struggling for hours to get the fixture list into the computer. FIXGEN has been programmed with all English and Scottish League fixtures for 1987/8. Simply type in the date, and the full fixture list is generated in seconds. Fully compatible with Poolswinner. Yearly updates available.

POOLSWINNER with FIXGEN £16.50 (for both)



COURSEWINNER V3

NOT JUST A TIPSTER PROGRAM, Coursewinner V3 can be used by experts

and occasional punters alike. You can develop and test your own unique winning system by adjusting the analysis formula, or use the program in simple mode. Coursewinner V3 uses statistical analysis of major factors including past form, speed ratings, course statistics, prize money, weight, going, trainer and jockey form etc. etc. It outputs most likely winners, good long odds bets, forecasts, tricast etc. The database includes vital course statistics for all British courses. You can update the database - never goes out of date. FULL PRINTER SUPPORT.

PRICE £15.00 (all inclusive) includes Flat AND National Hunt versions.

ALL PROGRAMS AVAILABLE FOR:

AMSTRAD CPCs, AMSTRAD PCWs, PC1512,

All BBCs, All SPECTRUMs, COMMODORE 64/128.

Supplied on tape (automatic conversion to disc) - except PCW and PC1512 (on disc - add £3.00).

Send Cheques/POs for return of post service to...



phone 24 hrs



37 COUNCILLOR LANE, CHEADLE, CHESHIRE SK3 2HX. ☎ 061-428 7425

(Send for full list of our software)



phone 24 hrs

SPIDER 2 REAL-TIME CONTROL FOR THE BBC MICRO

Watch the SPIDER!


- Powerful new BASIC commands for invoking PROCs from the User Port, Serial Port or the Keyboard.
- 8 independent countdown timers.
- Easy to install with no soldering.
- Comprehensive manual supplied.

New SPIDER 2 features

- Special keywords for controlling the Serial Port.
- Professional implementation of Foreground/Background processing.
- Reaction timing and pulse trains accurate to 0.1 milliseconds!

from £65 including VAT

SPIDER 2 is a RAM/ROM combination which uses none of the BBC's memory, so BASIC programs are unaffected. The BBC B+ is fully supported and we supply a complete range of digital, analogue and serial interfaces for use with SPIDER using the 1MHz bus. Ask now for details.



Available for BBC B, B+ and Master

Paul Fray Ltd
Willowcroft, Histon Road, Cambridge CB4 3JD
Telephone: (0223) 66529

COMPUTECK

We are Acorn Approved Dealers

- New Software & Hardware at discount prices
- "Trade in" deals on new Software & Hardware inc Archimedes
- Used Software & Hardware all at excellent prices
- We also buy in your used Software & some Hardware
- Minerva-Beebug-Clares-AMS-Acornsoft-Pace-PMS we have them all

Software & Hardware for "trade in" or "buying in" must be in original boxes complete with all the appropriate literature. Please send large SAE for price lists (over 900 items). If you wish to "trade in" or sell let us know what you have or require and for which computer. You will hear from us by return. This will be the best 13p on a stamp you will ever spend!!

Minerva System Delta & Card Index *Discount Price	£58.45
Instant Mini Office on Eproms *Discount Price	£53.94
Trade in Mini Office II for Instant Mini Office	£49.95
Computer Concepts Interword *Discount Price	£45.08
Trade in Wordwise Plus for Interword	£35.00
Second hand Price Computer Concepts Disc Doctor	£10.99

Just a few of the many bargains we have to offer you
Prices include VAT ACCESS and VISA accepted

Telephone 045 74 65953

Computeck (Dept MU)

I.O.O.F. House, 69 High Street West, Glossop, Derbyshire SK13 8AZ

Warning:

WARNING: Anyone sending 'pirated' software on any media will be reported to the Software House or Author for legal action by them!

ADVERTISERS' INDEX

4matron	78	Meedmore Distribution	116
21st Software	62	Mewsoft	146
Advanced Memory Systems	3	MicroLink Modem	66,67
Apex Software	133,150	Micro-Aid	133
B&S Computing	85	Microboss	146
Beebug	11,12,19	Microhelp	118
Blue Chip	148	Microman Computers	80
C&F Associates	146	Micromedia	77
Cantocks	133	Micronet	51
Carswell Computers	146	Micro-Prof	133
Centec	150	Microsol	148
Clares	140	Mid-Sussex Software	79
Coda Software	145	Minerva Systems	14
Commonside Hardware	69	Minic Business Services	161
Compuface	120	Mitsubishi	8
Computaccount	52	Morley Electronics	138,139
Computech	60	Nebulae	133
Computek	162	Opus Supplies	99
Computer & Technical Services	162	P&H Electronics	30
Computer Concepts	44,142	Paul Fray	162
Computer Express	70	Pearl Computers	20-22
Computer Repairs	116	Phillip A. Reynolds	146
Context Computing	150	Pineapple Software	132
CP Microsystems	148	PMS	131
Dabs Press	120	Selec Software	161
Datastore	120	Serious Statistical Software	72
Datathorn Systems	116	Silicon Vision	145
Delta Computers	134	Software Bargains	23
Derbyshire Software	162	Solidisk Technology	29
Disking	134,135	SMB Computer Electronics	38
Dram Electronics	116	SP Electronics	162
Electron & BBC Micro User Show	6	Superior Software	2,35,163,164
Etime	118	System	62
Flora Electronics	148	Taxan	64,65
Format Services	86	Technomatic	124-130
HPS	15-17	Towerhill Computers	88
Impact	91	Twist Computers	82
Integrex	49	Video Electronics	133
J&J Microchips	134	Vinder Associates	161
Keyzone Computer Products	78	Vine Micros	43
Kosmos	133	Voltmace	56
Lightspeed Software	42	Watford Electronics	100-113
M&M Computers	46	Weserve	78
Manor Court Supplies	145	Willow Software	161
Mayhew Telonics	150	WL Computer Services	162
Meadow Computers	120	Zonefour	86

S.P. ELECTRONICS

ARCHIMEDES	From £801.00
BBC MASTER COMPACT	From £359.00
BBC MASTER 128	£425.00
Disc Operating System B271	£75.00
Disc Operating System 1770	£49.95
G3WHO Ritty Program (Tape)	£7.50
G3WHO Ritty Program (Eprom Version)	£20.00
Circuit Board for Ritty decoder (inc. instructions) Ritty PCB	£10.00
Printer Cable (Centronics)	£12.90
Citizen 120D 120cps	£199.00
Data Recorder Acorn ALF03	£30.00
WORDWISE Word Processor	£33.00
Wordwise Plus Word Processor	£49.00
Slow Scan TV Circuit Board & Program (inc. instructions)	£17.50
ADFS	£29.90
Opus 5802 40/80 Track Disc Drive ExPSU	£126.50
Opus 5802SD 40/80 Track Disc Drive +PSU	£160.95

0% finance available on all Archimedes models.

Wide selection of software, books, leads, plugs, etc. All prices only while stocks last. All available Mail Order

48 Linby Road, Hucknall,
Notts. NG15 7TS
Tel: 0602 640377



Educational & institutional orders welcome

Carriage Extra

ATTENTION! SOLIDISK 256K & 128K USERS

Now reliable tools to help you control your Solidisk 256-128 boards.

SideAid 256 and SideAid 128 are recommended by Solidisk, and have been written to help you utilise the special features of the hardware.

SideAid 256 can be supplied as a 16K Eprom for £19.00, or now with Solidisk's Toolkit on a 32K Eprom for £23.00. These prices include manual and P&P. Side Aid 128 is supplied as a 16K Eprom for £19.00 - fully inc.

Please telephone for details

Available From:

Computer and Technical Services

4, Church Walk,
Eggington,
Beds. LU7 9QL
0525 210706

No Credit Cards Please

The Money-Wise Accounts System makes others seem like hard work . . .

- No paperwork to do. Full printouts at any time.
- Does VAT instantly.
- Full access to ALL information, mistakes corrected in seconds.
- Handles incomplete and missing records. Late entries - no problem.
- Lists debtors, creditors and all account balances at any date.
- Directly checks bank statements (reconciliation).
- Hundreds of accounts - thousands of transactions.
- Very fast - does not access disk whilst running.
- Accounts Editor - makes corrections/alterations easy.
- Automatically checks for errors.

FREE - Printer utility disc, sample accounts & full instructions

. . . The 16K ROM gives professional results for only £49.95 inc.

Phone (0742) 557229 for details of even more features

DERBYSHIRE SOFTWARE,
72 Derbyshire Lane, Sheffield S8 9EP
(Printer, disc drive and experience not essential)

ROOM 7 SOFTWARE

Now available on both 3.5" and 5.25" disc
INVESTMENT ANALYSER
VERSION 1 £18.95
VERSION 2 £25.00
POOLS CHEQUE
£12.50

SOCCER BOSS
£11.95

Fully bound software catalogue
50p P&P
Refundable with order

25% OFF THE PRICE OF ALL PROGRAMS IN FEBRUARY ONLY

Also covered by our catalogue - Soccer Boss, Pools Cheque, Investment Analyser 2, Matrix, Central Heating Calculator, Electrical Cable Selector, Structural Beam Calculator, Introduction to Statistics, Easy Banker

Letters/Cheques to: W. L. COMPUTER SERVICES, Dept. 4,
First floor, H.S.L. Building, 437 Warrington Road, Rainhill,
Merseyside, L35 4LL. Tel: 051-426 9660

VISA

"Play It Again, Sam"

FEATURING:
Four Number 1 Hits



THE BEST COMPILATION EVER for the BBC Micro and Acorn Electron

Sam, an ardent fan of Superior Software's games, is always ready for a challenge... and the tougher the better! Here's four games that, as time goes by, he returns to again and again.

Citadel, a fascinating arcade-adventure, features over 100 beautifully detailed screens of action. Computer Gamer reported: "The game is extremely good. Well worth the cash."

Thrust is simple and fun-to-play, yet incredibly realistic and highly addictive.

"This game has class... try it!" urged Computer & Video Games.

Stryker's Run is a challenging action-packed combat game.

"This game will impress you... the graphics are stunning... this should be in every collection," A & B Computing remarked.

Ravenskull is a massive arcade-adventure game, full of puzzles and problems to be solved.

Acorn User commented: "Ravenskull is a very good game and is destined to become another Superior classic."

BBC Micro Dual Cassette	£9.95	Acorn Electron Dual Cassette	£9.95
BBC Micro 5¼" Disc	£11.95	Acorn Electron 5¼" Disc	£11.95
BBC Master Compact 3½" Disc	£14.95	Acorn Electron 3½" Disc	£14.95

(Compatible with the BBC B, B+ and Master Series computers).



ACORNSOFT

Dept. PS3, Regent House, Skinner Lane, Leeds LS7 1AX. Telephone: 0532 459453

Please make
all cheques
payable to
"Superior
Software Ltd".



24 HOUR TELEPHONE
ANSWERING SERVICE FOR
ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately.

(This does not affect your statutory rights).



Bono takes the skeletons to a cauldron



Bono's partner Fozzy restrains a monster



BONE CRUNCHER

A PRIZE FOR EVERYONE WHO COMPLETES THE GAME

Buy Bonecruncher and see if you can complete all the game screens!

All successful players will receive a superb portable radio with headphones (illustrated on the right), a colourful Bono's Bathing Co. badge, and a signed certificate.

Closing Date: 30th April, 1988

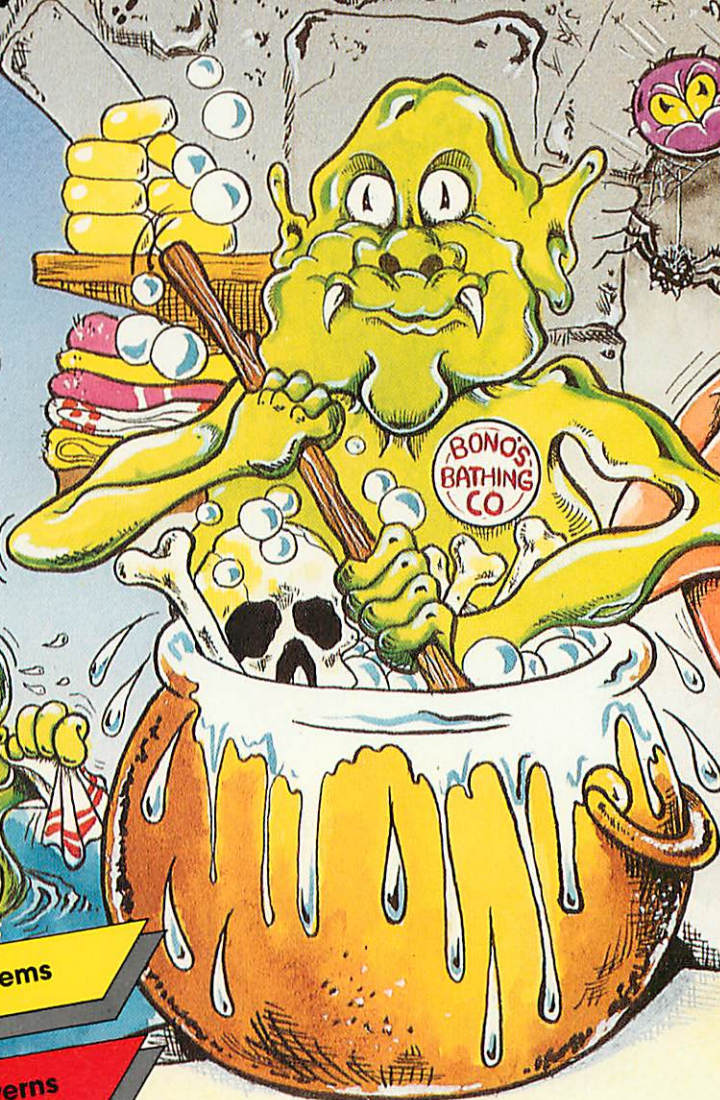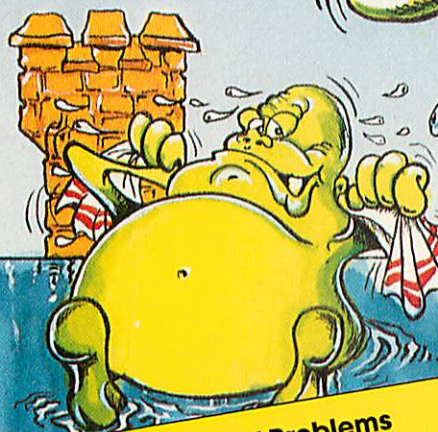

• Full of Strategic Puzzles and Problems

• Over 20 Increasingly Difficult Caverns

• Password Feature helps you to Progress

• Prize Competition for Skilled Players

• Humorous, Witty, a Barrel of Laughs

Bono The Dragon and his Flourishing Business

You are Bono, a friendly dragon residing in a picturesque sea-castle. As a shrewd business-dragon, keen on "nice little earners", you make your living by selling soap to the giant monsters who bathe in the sea surrounding the castle.

With the aid of your business partner, named Fozzy, you produce the soap by collecting skeletons amongst the castle caverns and then boiling the bones in a cauldron.

However, the castle caverns are fraught with danger: there are monsters who will kill you, spiders who will eat you alive, and glocks who will block your path. It will pay you dividends to also avoid the perilous trapdoors and hidden volcanoes.

A soap-opera not to be missed!

COMMODORE 64/H28 • COMMODORE AMIGA
BBC MICRO • ACORN ELECTRON

Cassettes: **\$9.95** (C64, BBC, Electron)
5 1/4" Discs: **\$11.95** (C64, BBC, Electron)
3 1/2" Discs: **\$14.95** (Amiga, BBC Master Compact)



Dept. BC3, Regent House, Skinner Lane,
Leeds LS7 1AX.
Telephone: (0532) 459453



24-HOUR TELEPHONE
ANSWERING SERVICE FOR ORDERS

OUR GUARANTEE

- All mail orders are despatched within 24 hours by first-class post.
- Postage and packing is free.
- Faulty cassettes and discs will be replaced immediately. (This does not affect your statutory rights).